



Art.-Nr: KSU519CC

Utgangsskilt lys sentral strømforsyning

Universell, CoreCompact 24, sentral strømforsyning, 22 m, IP54, plast, hvit

Innovative polycarbonate edge LED luminare for universal mounting. The installation using only 3 parts is kept simple.

Applicable for maintained or non-maintained operation mode. The toolless change and variable use of the pictograms provide planning security. Universal pictogram set (left, right, up, down) included. Exit sign according to EN 60598-1, EN 605982-22 and EN 1838 norms.



Mer informasjon



TEKNISKE DATA


Type armatur	Utgangsskilt lys
Monteringstype	Universell
Deteksjonsområde	22 m
piktogram	sett
Lyspærer	LED
Koffertmateriale	plast
Farge på huset	hvit
IP-beskyttelse)	IP54
Slagstyrke (IK)	≥ 3
Sertifisering	Søppeltømming, CE
beskyttelses klasse	3
omsorg	sentral strømforsyning
overvåkning	CoreCompact 24
Brotid	sentral strømforsyning
Driftsmodus	Standby kobling / permanent kobling
Inngangsspenning AC	24 V
Maks effekt.	2,1 W
Ytelse DS	2,1 W
Ytelse BS	0,4 W
dybde	34 mm
Bredde	250 mm



Høyde	174 mm
Vekt	0.56
Vekt inkludert emballasje	0.64
Tverrsnitt for tilkobling	2.5 mm ²
Koblingsinngang	Nei
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Ja
Tolltariffnummer	94056120
Opprinnelsesland	DEUTSCHLAND
EAN	4260682157447



TEKNISK TEGNING

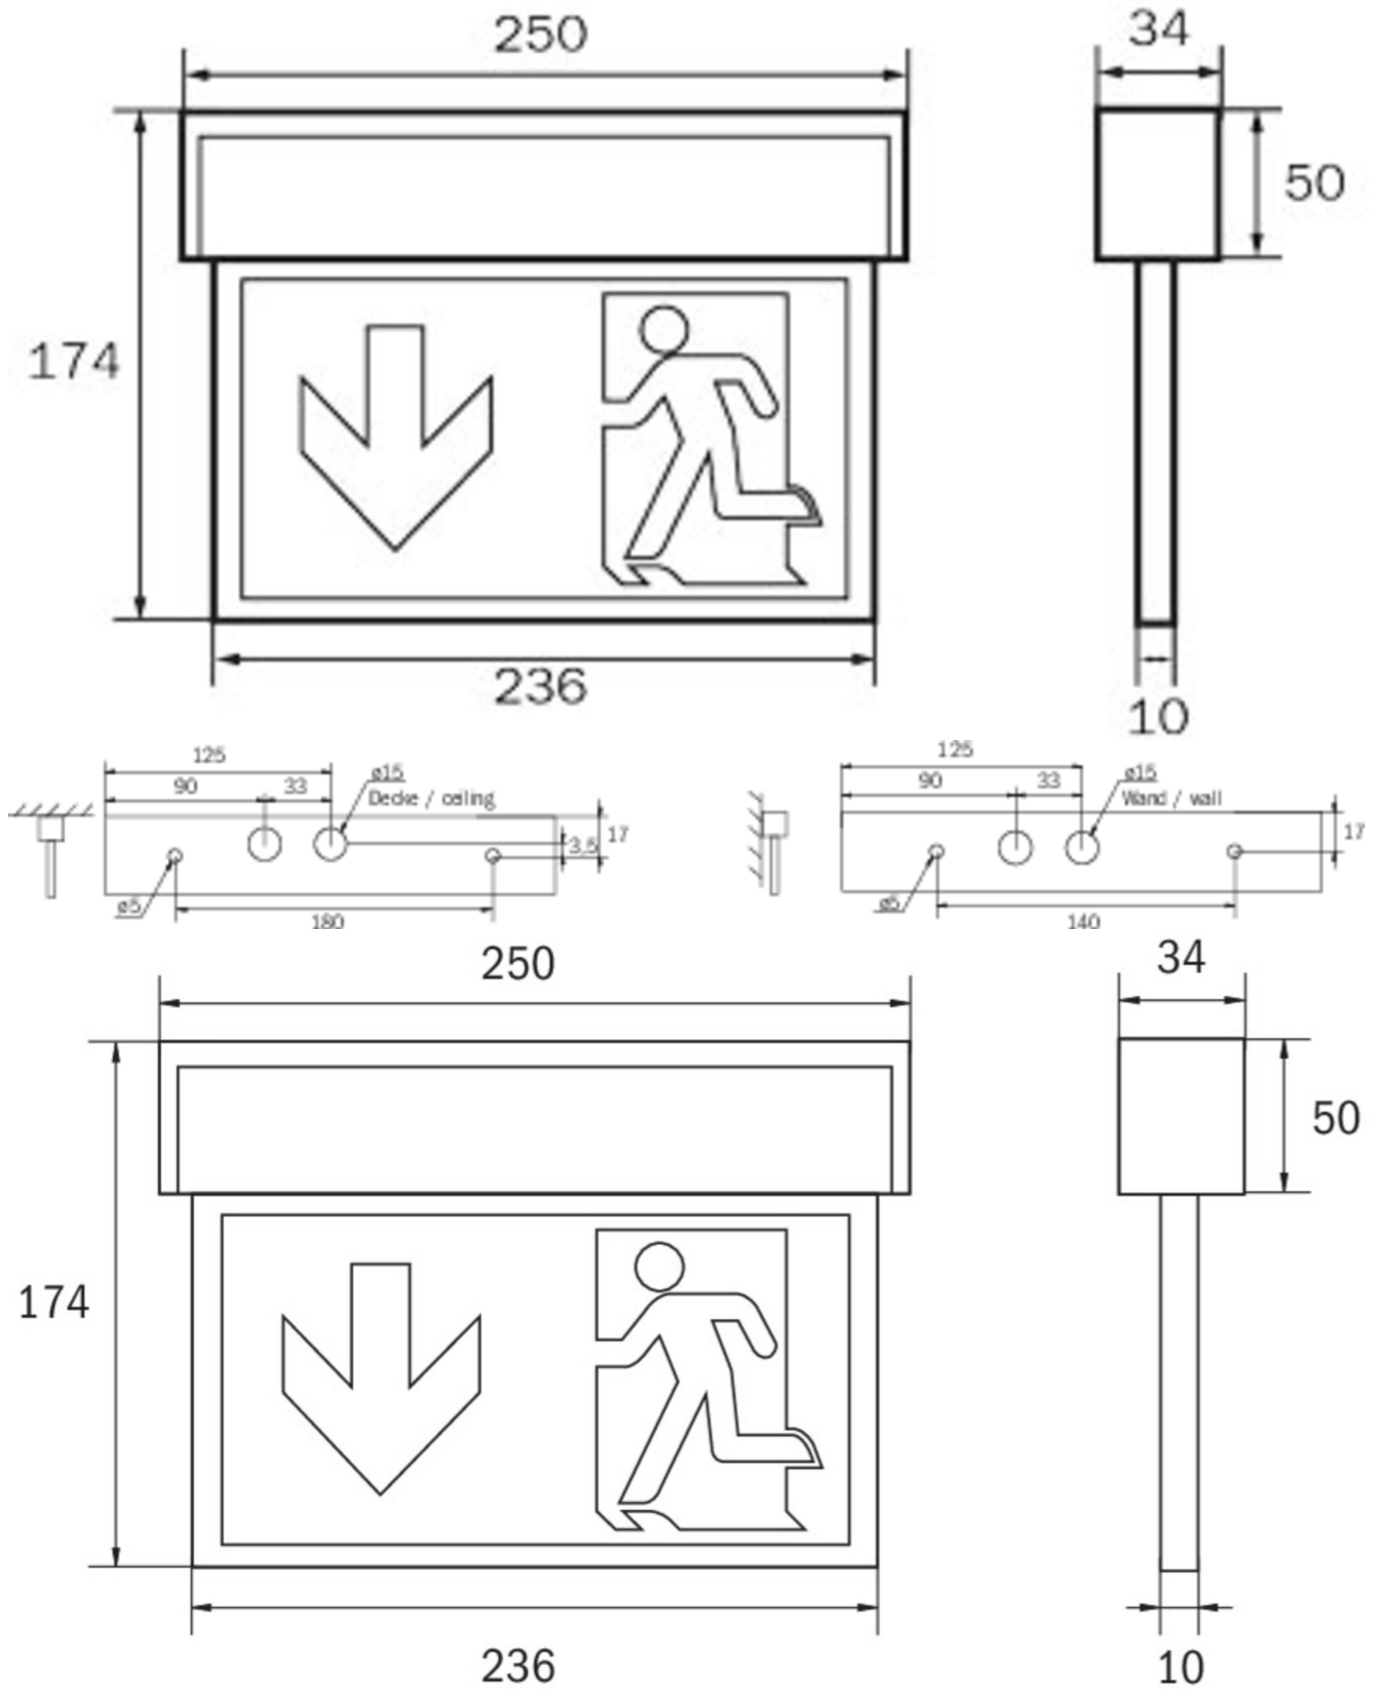



TILBEHØRSLISTE

KME-EB -
AWKSU -
2PW-EB -
KMBE -
BALLPLX-KMU -
DSA -
KSE-MB-WS -
KSE-MB-SI -

LIGNENDE PRODUKTER

Varenr.	Bilde	overvåkning	omsorg	Farge	investering	Automatisk inspeksjonsbok	Vedlikeholdsinnsats	fjernvedlikehold	maks. lys	Individuell lysovervåking
KSU019ML		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt

Fra: 28.06.2024 - Det tas forbehold om tekniske endringer og feil.