



Art.-Nr: KWIW411SC
Exit sign Supply
Ceiling, SelfControl, 1 h, 16 m, IP65, Plastic, white

Classic bar-shaped polycarbonate luminaire for ceiling mounting. Straight lines as well as the robust construction with a high ingress protection allow versatile use.

Pictograms according to DIN EN ISO 7010 and DIN ISO 3864 (left, right, above, below) are included as standard in the scope of delivery.



[More information](#)




TECHNICAL DATA

| Luminaire type | Exit sign |
|------------------------|------------------|
| Mounting | Ceiling |
| Recognition distance | 16 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | CE, WEEE, D-Sign |
| Insulation class | 2 |
| Monitoring | SelfControl |
| Bridging time | 1 h |
| Power max. | 5,5 W |
| Power DS | 4,6 W |
| Power BS | 0,4 W |
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 93 mm |
| Width | 390 mm |
| Height | 139 mm |
| Weight | 0.87 |



| | |
|-------------------------|---------------|
| Weight incl. packaging | 0.97 |
| Luminous flux mains | 320 lm |
| Luminous flux emergency | 320 lm |
| Customs tariff number | 94056120 |
| EAN | 4260766553448 |

TECHNICAL DRAWING

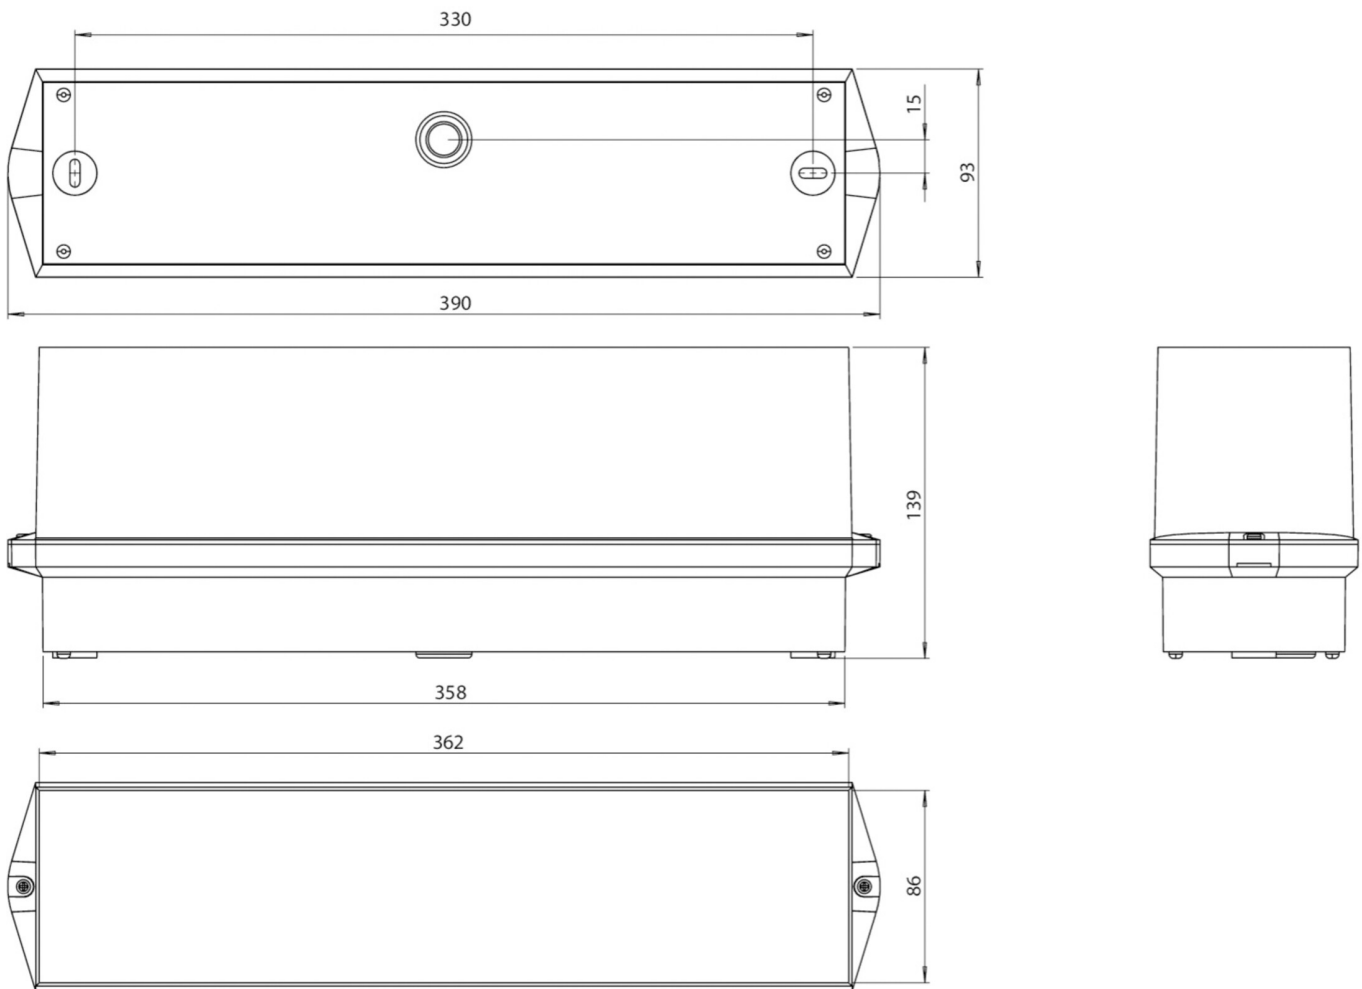

ACCESSORY LIST

BKW -

As of: 10.07.2024 - Subject to technical changes and errors.