



Art.-Nr: KWIW529CC

Safety luminaire Central power supply

**Universal, CoreCompact 24, Central power supply, , IP65,
Plastic, white**

Classic bar-shaped polycarbonate luminaire for wall or ceiling mounting. Straight lines as well as the robust construction with a high ingress protection allow versatile use.

Pictograms according to DIN EN ISO 7010 and DIN ISO 3864 (left, right, above, below) are included as standard in the scope of delivery.



[More information](#)






TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, Waste disposal, D-Sign
Insulation class	3
Supply	Central power supply
Monitoring	CoreCompact 24
Bridging time	Central power supply
Operating mode	Standby circuit / permanent circuit
Input voltageAC	24 V
Power max.	3,8 W
Power DS	3,8 W
Power BS	0,4 W
Depth	86 mm
Width	390 mm
Height	99 mm



Weight	0.63
Weight incl. packaging	0.73
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260682157485

TECHNICAL DRAWING

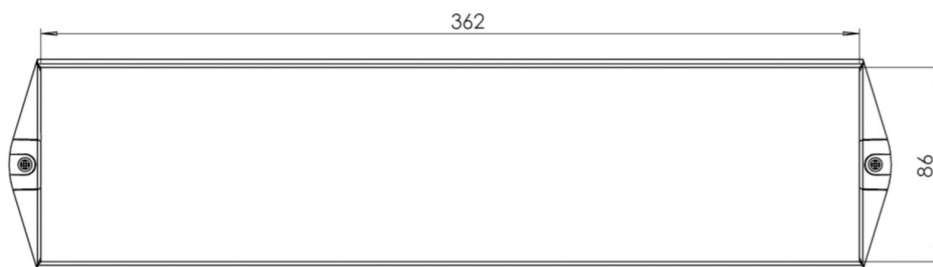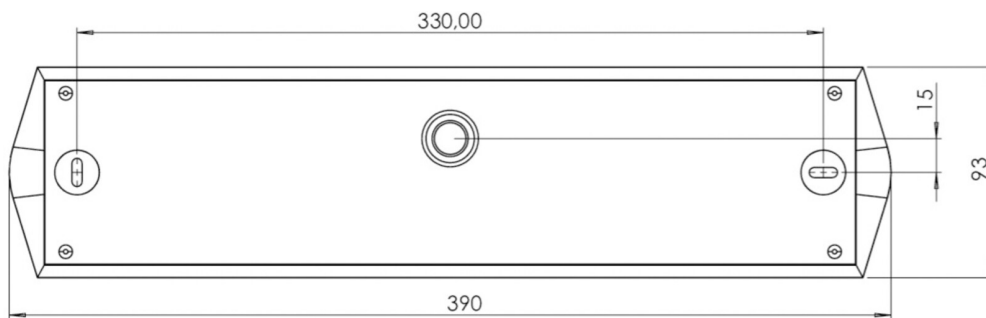



ACCESSORY LIST

BKW -

RELATED PRODUCTS

Art-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KWIW029ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
KWIW029ML-OP		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central

As of: 28.06.2024 - Subject to technical changes and errors.