



**Art.-Nr: KXU029**

**Exit sign, Safety luminaire Centralised power supply systems  
Universal, CPS, CPS, 30 m, IP40, Plastic, white**

Innovative polycarbonate edge luminaire for universal mounting wall/ceiling/recessed ceiling. Tapered design housing for appealing area perception.

Applicable for maintained or nonmaintained operation mode. Improved reliability through easy to install universal use of pictograms. Universal insertion pictogram set (left, right, down, up) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.

- Also available as combined safety light/rescue sign with ERT-LED and clear cover
- Simple pictogram mounting (one and double-sided), plugging-technique



More information



## TECHNICAL DATA



Luminaire type	Exit sign, Safety luminaire
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, CNBOP, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CPS
Bridging time	CPS
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,6 W



Power DS	4.6 W
Power BS	0 W
Depth	48 mm
Width	332 mm
Height	242 mm
Weight	0.85
Weight incl. packaging	0.96
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260123685881



## TECHNICAL DRAWING

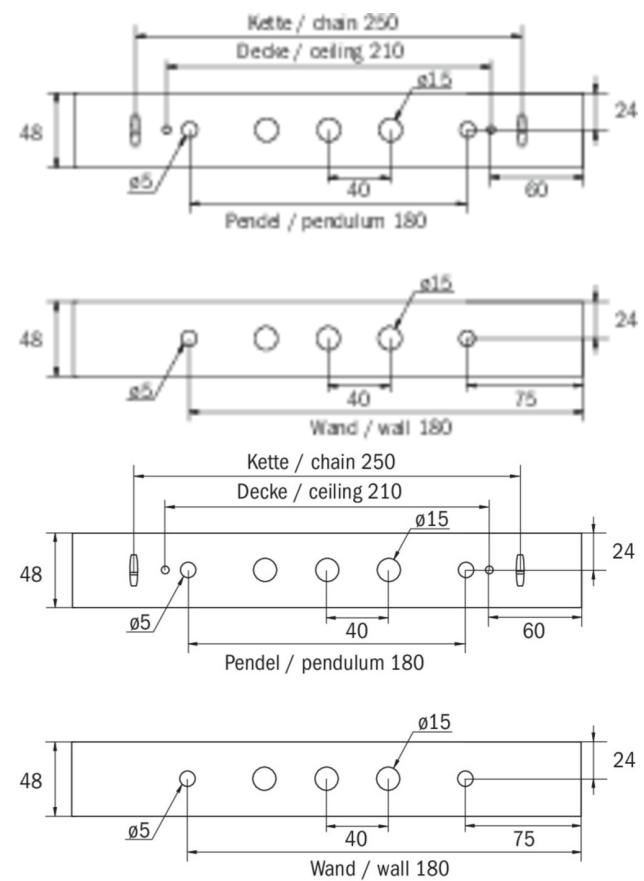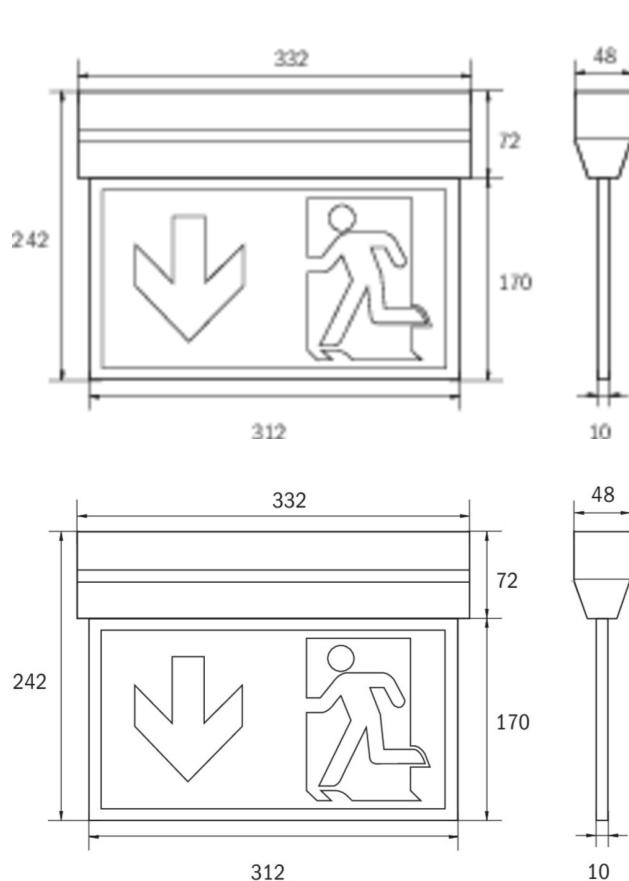

## ACCESSORY LIST

KXE-EB -

AWX001 -

DSA -

2PW-EB -

2DW-EB -

KXBE -

As of: 09.07.2024 - Subject to technical changes and errors.