



Art.-Nr: KXU029ML

**Exit sign, Safety luminaire Central power supply
Universal, ML, Central power supply, 30 m, IP40, Plastic,
white**

Innovative polycarbonate edge luminaire for universal mounting wall/ceiling/recessed ceiling. Tapered design housing for appealing area perception.

Applicable for maintained or nonmaintained operation mode. Improved reliability through easy to install universal use of pictograms. Universal insertion pictogram set (left, right, down, up) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.

- Also available as combined safety light/rescue sign with ERT-LED and clear cover
- Simple pictogram mounting (one and double-sided), plugging-technique



More information



TECHNICAL DATA



Luminaire type	Exit sign, Safety luminaire
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE, CNBOP, ENEC
Insulation class	2
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V



Power max.	5,2 W
Power DS	5,2 W
Power BS	1,1 W
Depth	48 mm
Width	332 mm
Height	242 mm
Weight	0.88
Weight incl. packaging	0.99
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260659562540



TECHNICAL DRAWING

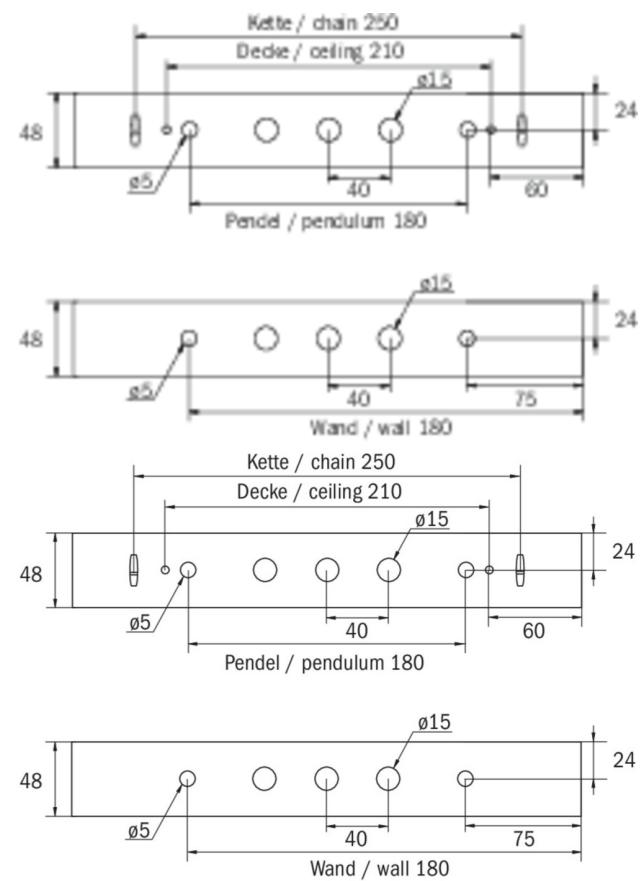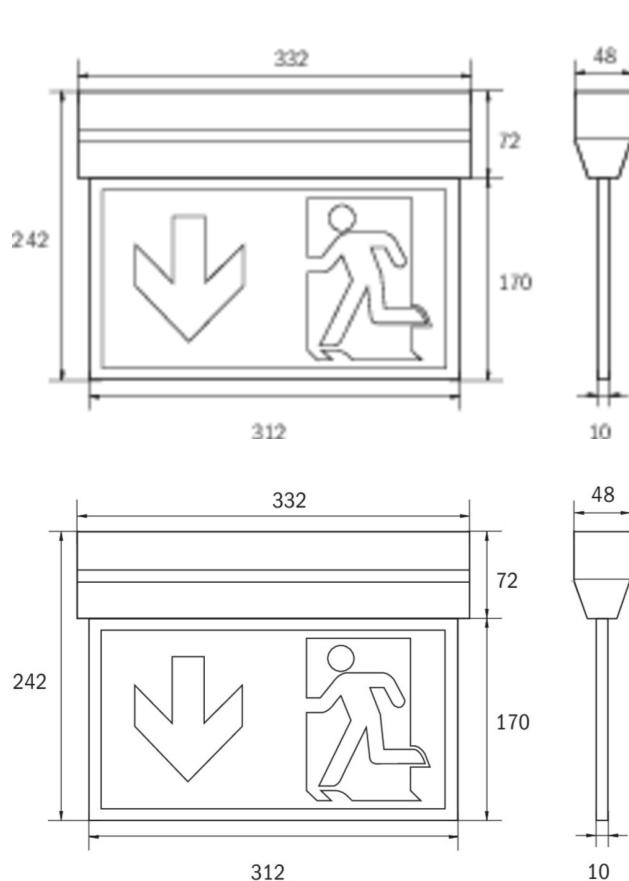

ACCESSORY LIST

KXE-EB -

AWX001 -

DSA -

2PW-EB -

2DW-EB -

KXBE -



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KXU009ML		ML	Central power supply	€€€	Yes	low	Yes	1,920 per system	central	
KXU019ML		ML	Central power supply	€€€	Yes	low	Yes	1,920 per system	central	

As of: 28.06.2024 - Subject to technical changes and errors.