



Art.-Nr: KXU029ML

**Utgangsskilt lys, Sikkerhetslys sentral strømforsyning
Universell, ML, sentral strømforsyning, 30 m, IP40, plast, hvit**

Innovative polycarbonate edge luminaire for universal mounting wall/ceiling/ recessed ceiling. Tapered design housing for appealing area perception. Applicable for maintained or nonmaintained operation mode. Improved reliability through easy to install universal use of pictograms. Universal insertion pictogram set (left, right, down, up) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.

- Also available as combined safety light/rescue sign with ERT-LED and clear cover
- Simple pictogram mounting (one and double-sided), plugging-technique



Mer informasjon



TEKNISKE DATA

Type armatur	Utgangsskilt lys, Sikkerhetslys
Monteringstype	Universell
Deteksjonsområde	30 m
piktogram	sett
Lyspærer	LED
Koffertmateriale	plast
Farge på huset	hvit
IP-beskyttelse)	IP40
Slagstyrke (IK)	≥ 3
Sertifisering	Søppeltømming, CE, CNBOP, ENEC
beskyttelses klasse	2
omsorg	sentral strømforsyning
overvåkning	ML
Brotid	sentral strømforsyning
Driftsmodus	Individuell lysveksling
Inngangsspenning AC	230 V
Inngangsfrekvens	50/60 Hz
Inngangsspenning DC	216 V
Maks effekt.	5,2 W



Ytelse DS	5,2 W
Ytelse BS	1,1 W
dybde	48 mm
Bredde	332 mm
Høyde	242 mm
Vekt	0.88
Vekt inkludert emballasje	0.99
Tverrsnitt for tilkobling	2.5 mm ²
Koblingsinngang	Ja
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Ja
Lysstrømnettverk	520 lm
Lysstrøm nødsituasjon	520 lm
Tolltariffnummer	94056120
Opprinnelsesland	DEUTSCHLAND
EAN	4260659562540



Technical drawings of the 'EXIT' sign, showing front and side views with dimensions.

Front View (Top):

- Overall width: 332
- Overall height: 242
- Top section height: 72
- Bottom section height: 170
- Bottom section width: 312
- Icons: A downward arrow on the left and a running figure on the right.

Side View (Top):


- Top section width: 48
- Bottom section width: 10

Front View (Bottom):

- Overall width: 332
- Overall height: 242
- Top section height: 72
- Bottom section height: 170
- Bottom section width: 312
- Icons: A downward arrow on the left and a running figure on the right.

Side View (Bottom):

- Top section width: 48
- Bottom section width: 10

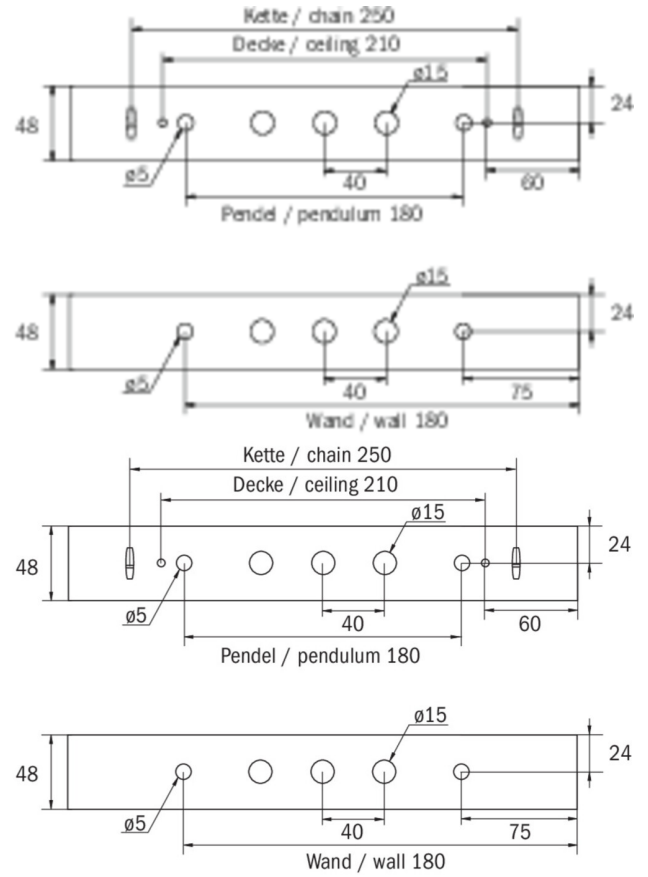

KXE-EB -
AWX001 -
DSA -
2PW-EB -
2DW-EB -
KXBE -



LIGNENDE PRODUKTER

Varenr.	Bilde	overvåkning	omsorg	Farge	investering	Automatisk inspeksjonsbok	Vedlikeholdsinnsett	fjernvedlikehold	maks. lys	Individuell lysovervåking
KXU009ML		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt
KXU019ML		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt

Fra: 28.06.2024 - Det tas forbehold om tekniske endringer og feil.