



Art.-Nr: KXU413WL
Exit sign Single Battery
Universal, Wireless Professional, 3 h, 30 m, IP40, Plastic,
white

Innovative polycarbonate edge luminaire for universal mounting wall/ceiling/ recessed ceiling. Tapered design housing for appealing area perception. Applicable for maintained or nonmaintained operation mode. Improved reliability through easy to install universal use of pictograms. Universal insertion pictogram set (left, right, down, up) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.

- Also available as combined safety light/rescue sign with ERT-LED and clear cover
- Simple pictogram mounting (one and double-sided), plugging-technique



More information



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	3 h
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 Hz
Power max.	5,3 W



Power DS	4,3 W
Power BS	0,7 W
Depth	48 mm
Width	332 mm
Height	242 mm
Weight	0.95
Weight incl. packaging	1.06
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260766559457_119104



TECHNICAL DRAWING

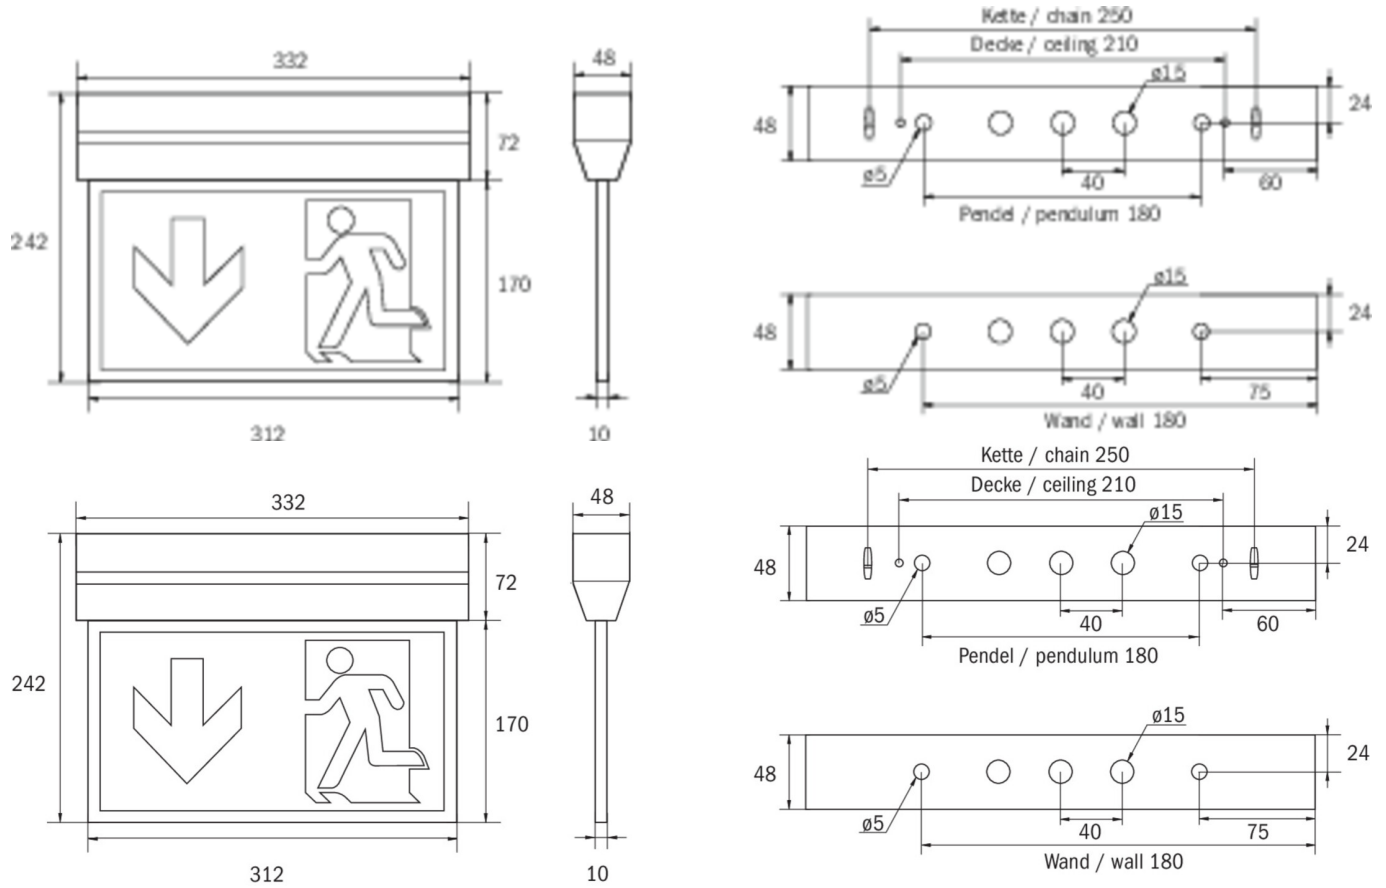

ACCESSORY LIST

KXE-EB -
AWX001 -
DSA -
2PW-EB -
2DW-EB -
KXBE -

As of: 08.07.2024 - Subject to technical changes and errors.