



Art.-Nr: KXU423SC

Exit sign, Safety luminaire Supply

Universal, SelfControl, 3 h, 30 m, IP40, Plastic, white

Innovative polycarbonate edge luminaire for universal mounting wall/ceiling/
recessed ceiling. Tapered design housing for appealing area perception.

Applicable for maintained or nonmaintained operation mode. Improved reliability
through easy to install universal use of pictograms. Universal insertion pictogram
set (left, right, down, up) included. Signs according to EN 60598-1, EN 60598-2-22
and EN 1838 norms.

- Also available as combined safety light/rescue sign with ERT-LED and clear cover
- Simple pictogram mounting (one and double-sided), plugging-technique



[More information](#)




TECHNICAL DATA

Luminaire type	Exit sign, Safety luminaire
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl
Bridging time	3 h
Power max.	6,7 W
Power DS	5,4 W
Power BS	0,9 W
Ambient temperature DS	-5 °C - 35 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	48 mm



Width	332 mm
Height	242 mm
Weight	1.04
Weight incl. packaging	1.15
Luminous flux mains	500 lm
Luminous flux emergency	500 lm
Customs tariff number	94056120
EAN	4260766557446

TECHNICAL DRAWING

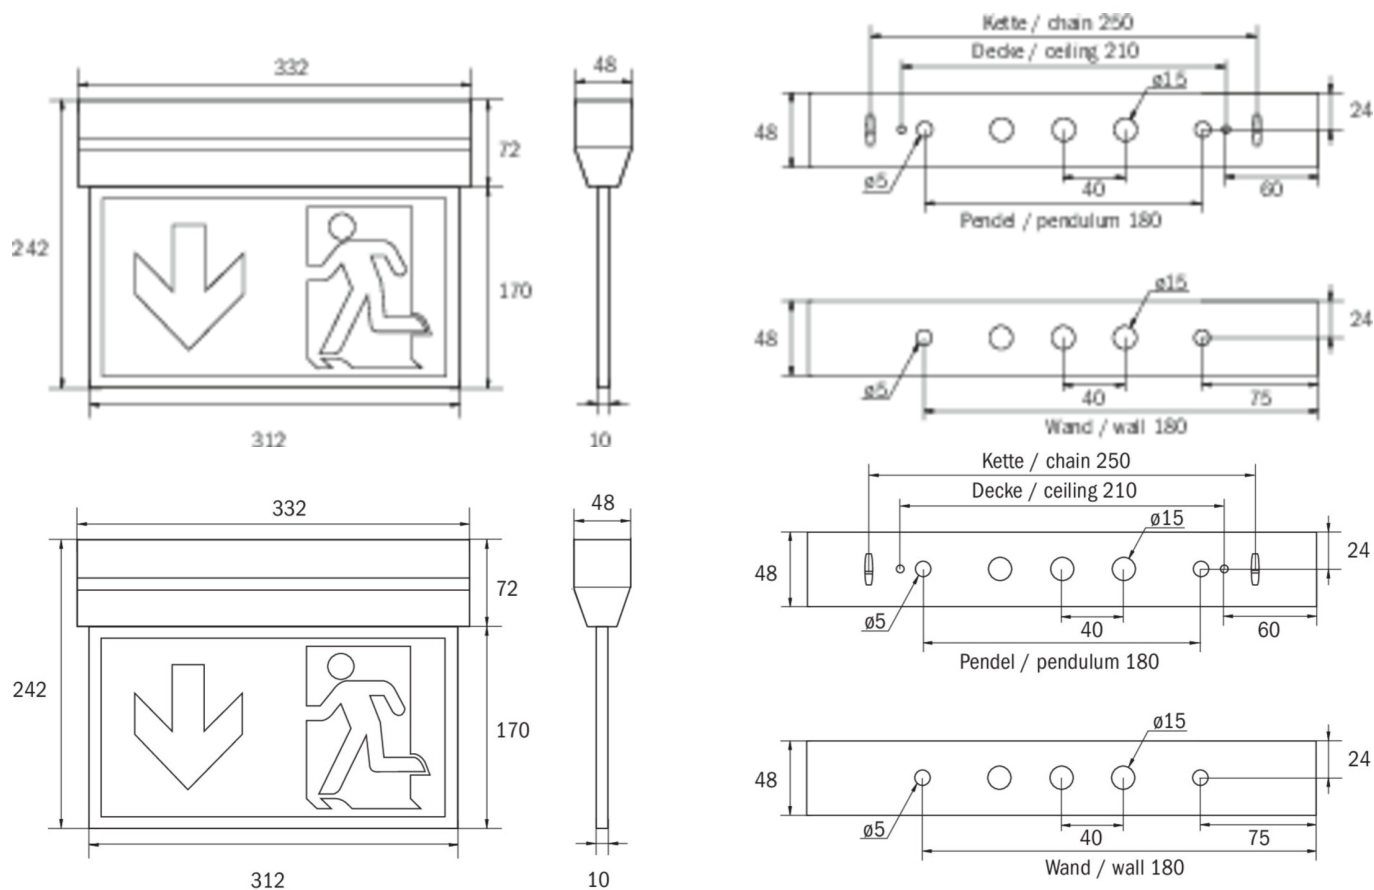



ACCESSORY LIST

KXE-EB -

AWX001 -

DSA -

2PW-EB -

2DW-EB -

KXBE -

As of: 10.07.2024 - Subject to technical changes and errors.