



**Art.-Nr: LFD12009ML-NW**  
**General light, Safety luminaire Central power supply**  
**Universal, ML, Central power supply, , IP65, Polycarbonate,**  
**Opal**



The robust LED wall and ceiling luminaire made of glass fibre-reinforced polyester for damp locations is suitable for illuminating storage areas, car parks, etc. In mains operation, the luminaire has an output of up to 4,500 lm. External mounting brackets facilitate installation.



[More information](#)




## TECHNICAL DATA

Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Opal
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	CE, Waste disposal
Insulation class	1
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	38 W
Power DS	38 W
Power BS	1,5 W
Depth	1220 mm
Width	82 mm



Height	97 mm
Weight	1.8
Weight incl. packaging	2.05
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	4500 lm
Luminous flux emergency	4500 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260682142078

## TECHNICAL DRAWING

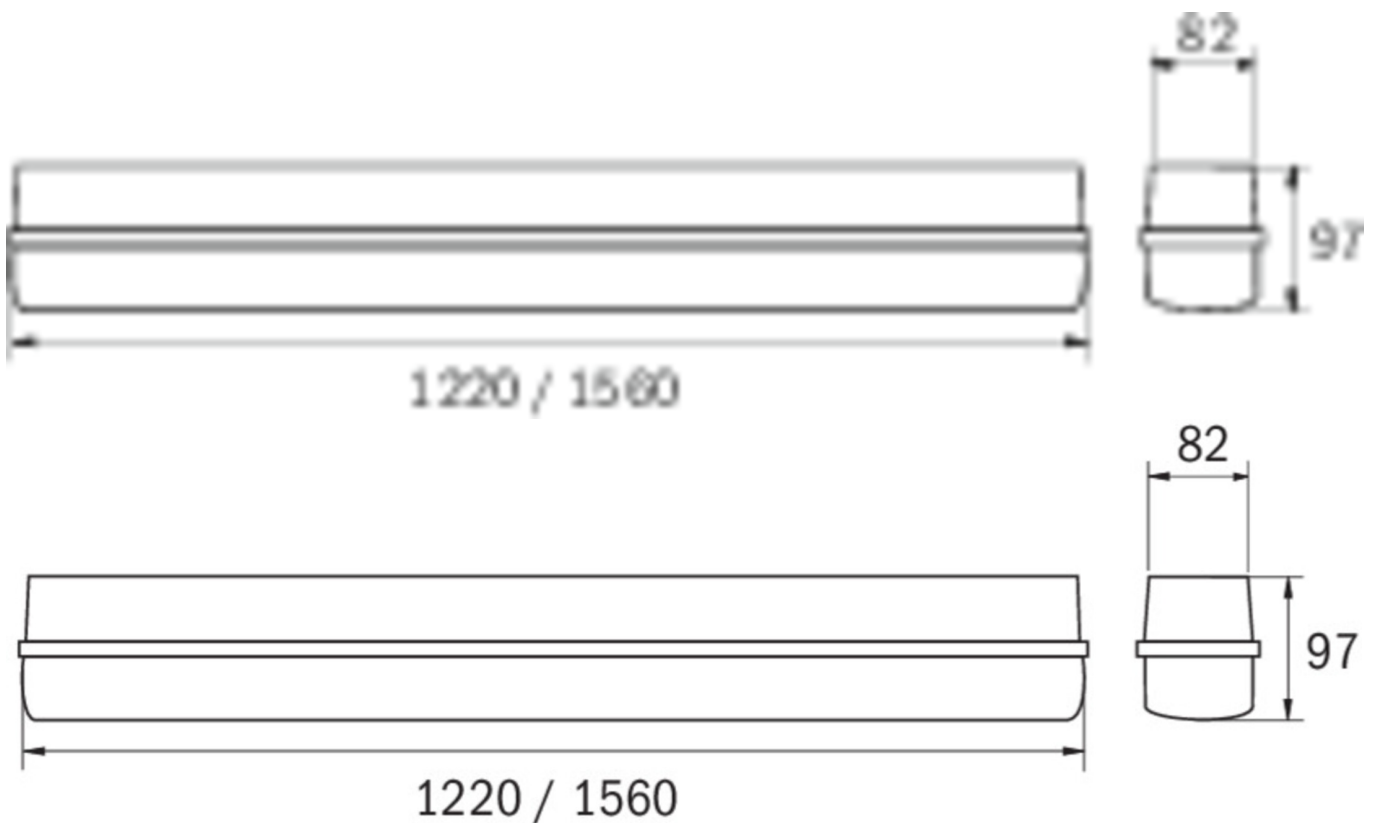



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
----------	-------	------------	--------	-------	------------	---------------	-------------------	--------------------	-----------------	-----------------------------

As of: 28.06.2024 - Subject to technical changes and errors.