



Art.-Nr: LFD15003SC-NW
General light, Safety luminaire Single Battery
Universal, SelfControl, 3 h, , IP65, Polycarbonate, Opal



The robust LED wall and ceiling luminaire made of glass fibre-reinforced polyester for damp locations is suitable for illuminating storage areas, car parks, etc. In mains operation, the luminaire has an output of up to 7,000 lm. External mounting brackets facilitate installation.



[More information](#)




TECHNICAL DATA

Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Opal
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	CE, Waste disposal
Insulation class	1
Supply	Single Battery
Monitoring	SelfControl
Bridging time	3 h
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Power max.	55 W
Power DS	54 W
Power BS	0,5 W
Depth	1560 mm
Width	82 mm
Height	97 mm
Weight	2.327



Weight incl. packaging	2.677
Connection cross-section	1.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	7000 lm
Luminous flux emergency	500 lm
Customs tariff number	94051140
Country of origin	DEUTSCHLAND
EAN	4260659566494

TECHNICAL DRAWING

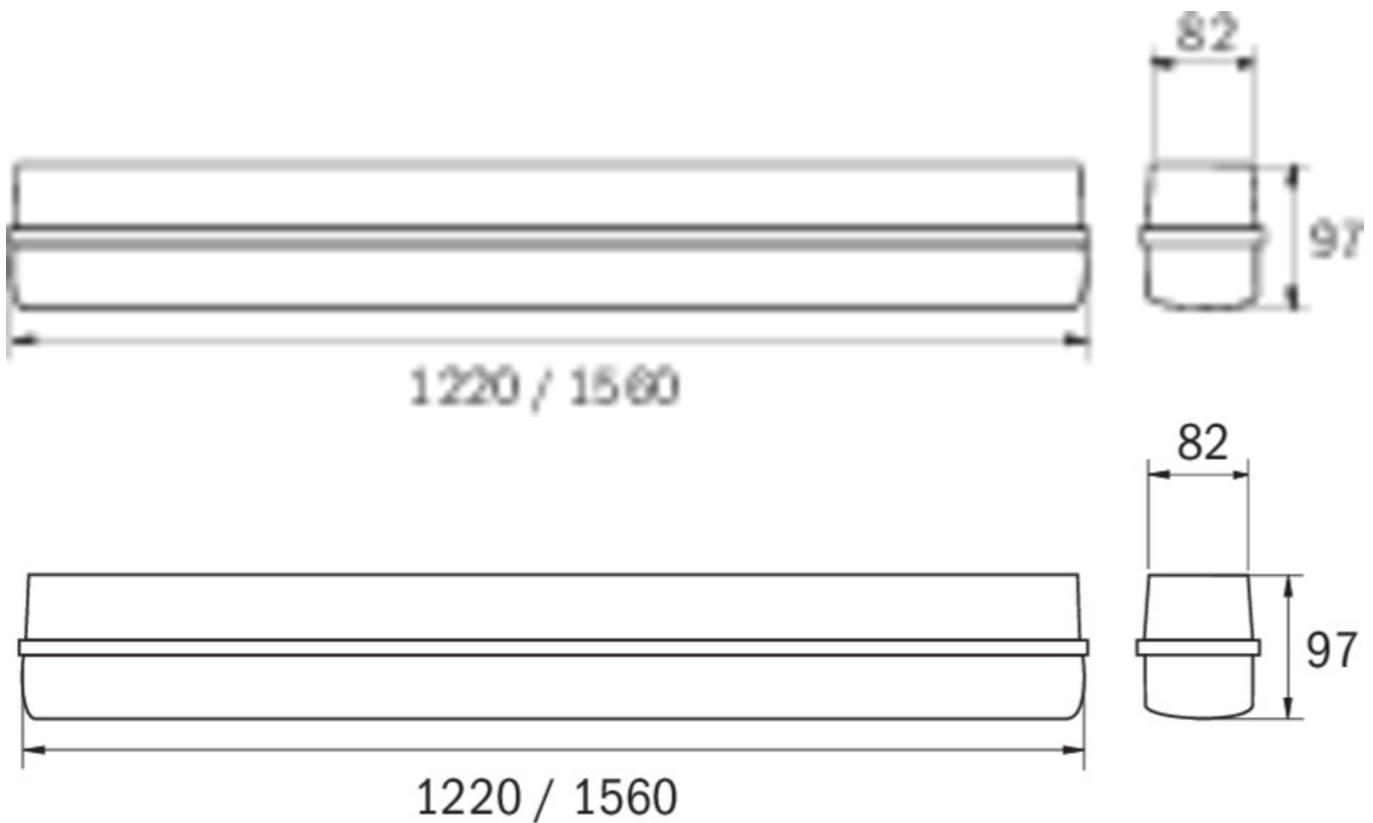



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
----------	-------	------------	--------	-------	------------	---------------	-------------------	--------------------	-----------------	-----------------------------

As of: 29.06.2024 - Subject to technical changes and errors.