



Art.-Nr: LFD15003SC-NW
Generelt lys, Sikkerhetslys Enkelt batteri
Universell, Selvkontroll, 3 timer, , IP65, Polykarbonat, opal



The robust LED wall and ceiling luminaire made of glass fibre-reinforced polyester for damp locations is suitable for illuminating storage areas, car parks, etc. In mains operation, the luminaire has an output of up to 7,000 lm. External mounting brackets facilitate installation.



Mer informasjon




TEKNISKE DATA

Type armatur	Generelt lys, Sikkerhetslys
Monteringstype	Universell
piktogram	Nei
Lyspærer	LED
Koffertmateriale	Polykarbonat
Farge på huset	opal
IP-beskyttelse)	IP65
Slagstyrke (IK)	8
Sertifisering	CE, Søppeltømming
beskyttelses klasse	1
omsorg	Enkelt batteri
overvåkning	SelfControl
Brotid	3 timer
Driftsmodus	Standby kobling / permanent kobling
Inngangsspenning AC	230 V
Inngangsfrekvens	50/60 Hz
Maks effekt.	55 W
Ytelse DS	54 W
Ytelse BS	0,5 W
dybde	1560 mm
Bredde	82 mm
Høyde	97 mm
Vekt	2.327



Vekt inkludert emballasje	2.677
Tverrsnitt for tilkobling	1.5 mm ²
Koblingsinngang	Ja
Blokkering av nødlys	Nei
Batteritilkobling	Støpsel
Dimmefunksjon	Nei
Lysstrømnettverk	7000 lm
Lysstrøm nødsituasjon	500 lm
Tolltariffnummer	94051140
Opprinnelsesland	DEUTSCHLAND
EAN	4260659566494

TEKNISK TEGNING

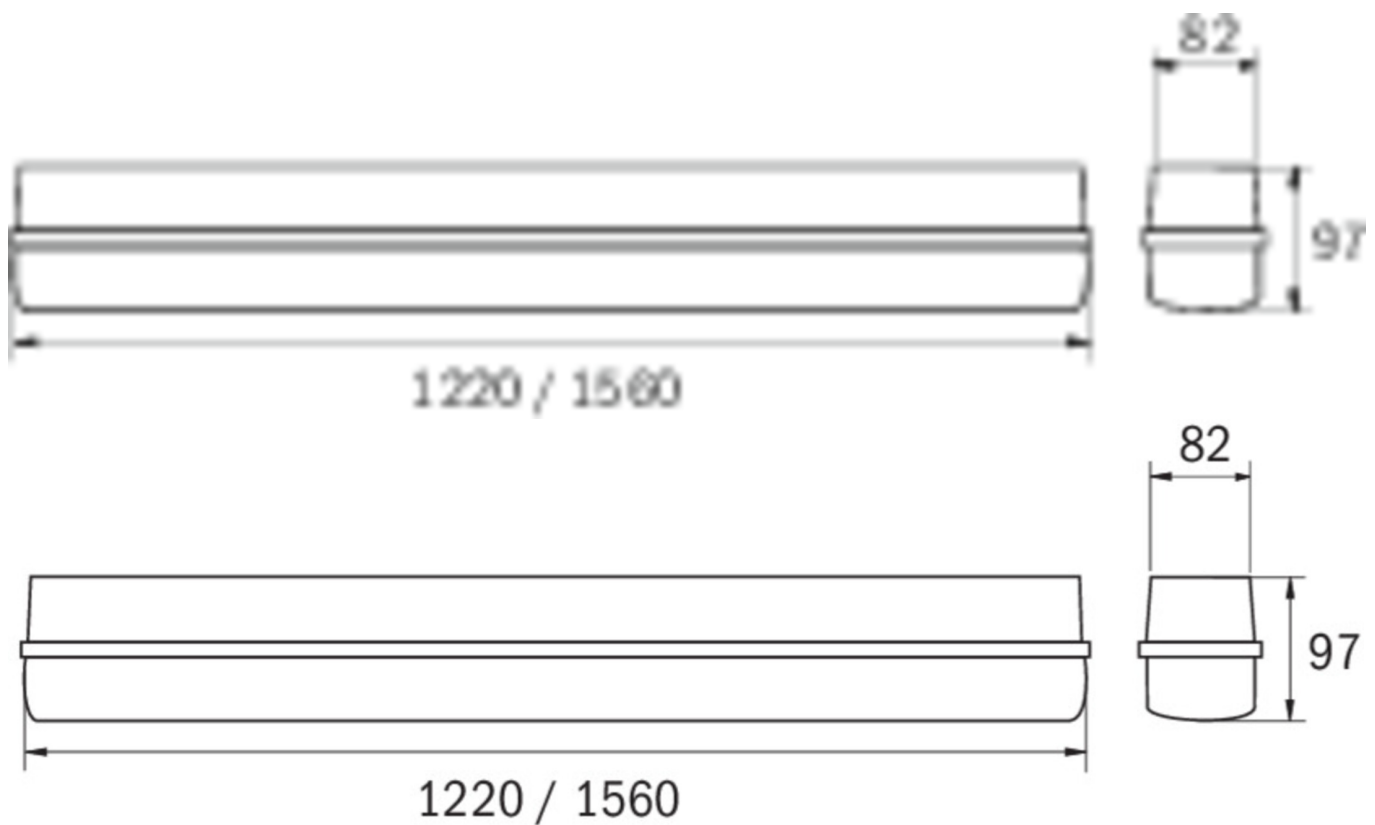



LIGNENDE PRODUKTER

Varenr.	Bilde	overvåkning	omsorg	Farge	investering	Automatisk inspeksjonsbok	Vedlikeholdsinnsett	fjernvedlikehold	maks. lys	Individuell lysovervåking
---------	-------	-------------	--------	-------	-------------	---------------------------	---------------------	------------------	-----------	---------------------------

Fra: 29.06.2024 - Det tas forbehold om tekniske endringer og feil.