





Art.-Nr: LSYS-B4

The beam lens is used for additional illumination of wall-mounted fire-fighting, reporting and first-aid equipment as well as escape and rescue plans with the normatively required luminous intensity of 5lx.

For optimal light distribution, it can be quickly installed directly at the installation site in the respective luminaire, depending on the application. This makes assembly easier and increases flexibility during installation.








DONNÉES TECHNIQUES

Profondeur	5 mm
Largeur	60 mm
Hauteur	100 mm
Poids	0.01 kg
Numéro du tarif douanier	94059200
Pays d'origine	CHINA
EAN	4260682159212



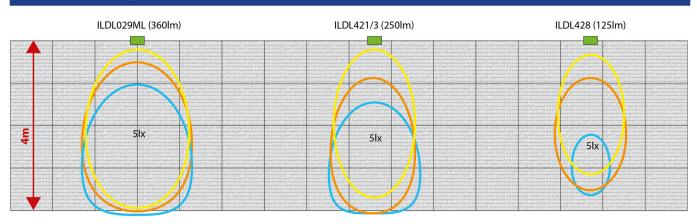

Abstand zur Wand / Distance to wall 1m
Abstand zur Wand / Distance to wall 1,5m
Abstand zur Wand / Distance to wall 2m

stand: 21.06.2024 - Sous réserve de modifications techniques et d'erreurs.