



**Art.-Nr: LXD411SC**

**Exit sign**

**Ceiling, SelfControl, , 34 m, IP40, Aluminium, Anodised aluminium**

Emergency luminaire in a sleek Aluminium profile, matt anodized for ceiling mounting with an additional light source to light the floor below the luminaire. Housing is openable toollessly. Applicable for maintained or non-maintained operation. The toolless change and variable use of these pictograms provide planning security on site. Pluggable set of pictograms (left, right, down, up) is included in the scope of delivery. Emergency luminaire according to DIN EN 60598-1, DIN EN 60598-2-22 und DIN EN 1838.

Automatic monitoring of the emergency light with SelfControl.



More information

[www.rp-group.com/en/item/LXD411SC](http://www.rp-group.com/en/item/LXD411SC)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Ceiling
Recognition distance	34 m
Pictograph	Set
Housing material	Aluminium
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	3
Certification	WEEE, CE
Insulation class	1
Monitoring	SelfControl
Battery	/
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	62 mm
Width	384 mm
Height	214 mm
Weight	1.21



Weight incl. packaging	1.41
Customs tariff number	94056180
EAN	4260766556494



TECHNICAL DRAWING

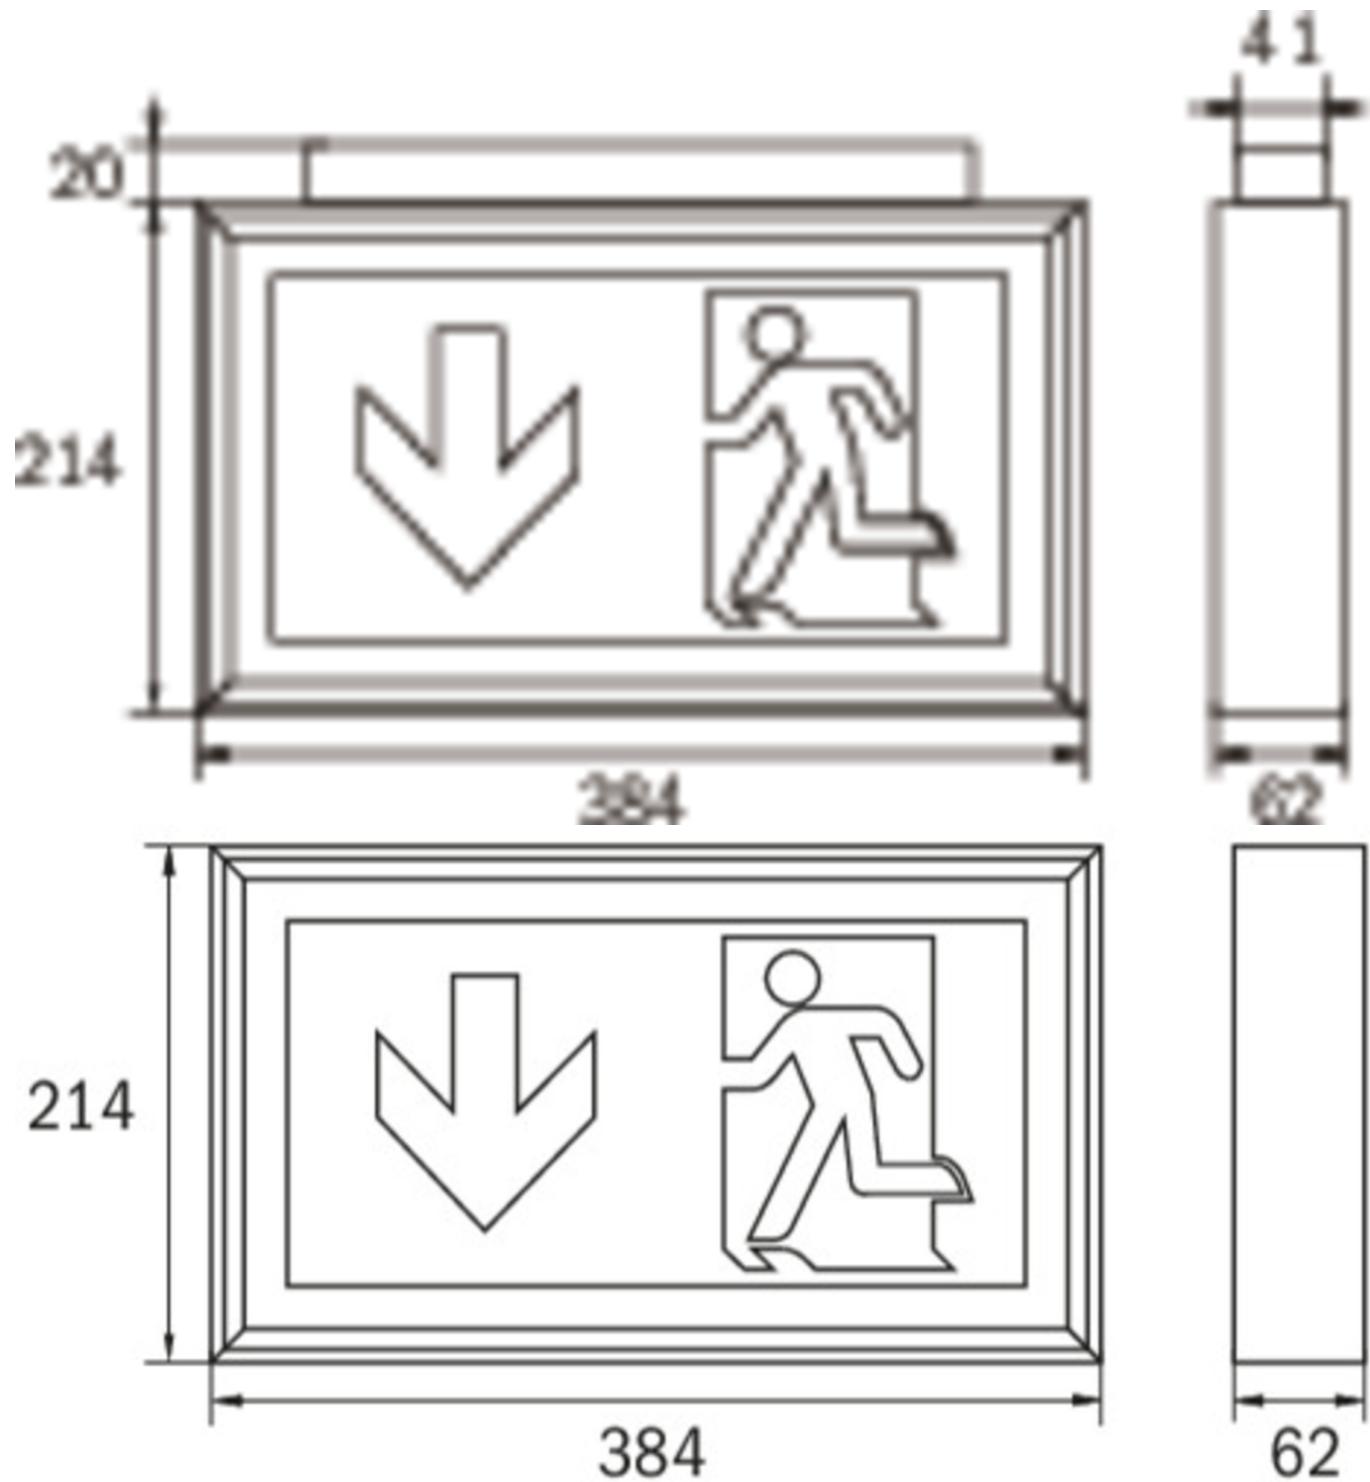



## ACCESSORY LIST

DSA -

2PS-EB -

2DS-EB -

As of: 04.09.2024 - Subject to technical changes and errors.