



Art.-Nr: MMD009-AZ

Exit sign Centralised power supply systems

**Recessed mounting, Without monitoring, CPS, 21 m, IP40,
Zinc die-cast, Anthracite**

Slim, high-quality, zinc die-cast emergency exit sign luminaire with a modern design for ceiling mounting. Suited to inscription on one or two sides.

The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information

www.rp-group.com/en/item/MMD009-AZ



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	21 m
Pictograph	Set
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz




Input voltage DC	100-254 V
Power max.	3,9 W
Power DS	3,9 W
Power BS	0 W
Ambient temperature DS	-25 °C - 40 °C
Ambient temperature BS	-25 °C - 40 °C
Depth	52 mm
Width	236 mm
Height	138 mm
Weight	0.04
Weight incl. packaging	0.04
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Customs tariff number	94056180
EAN	4260659562885



TECHNICAL DRAWING

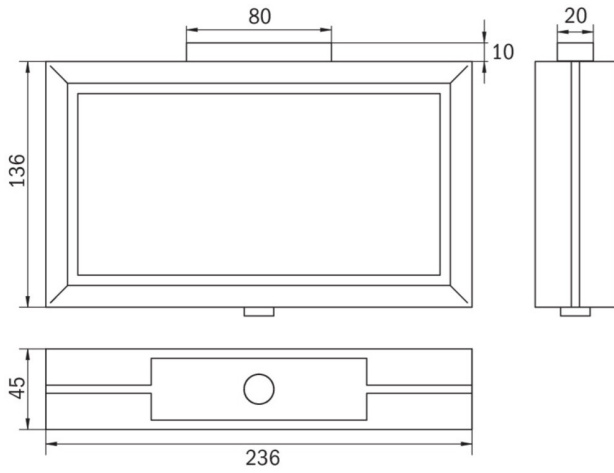

MMD

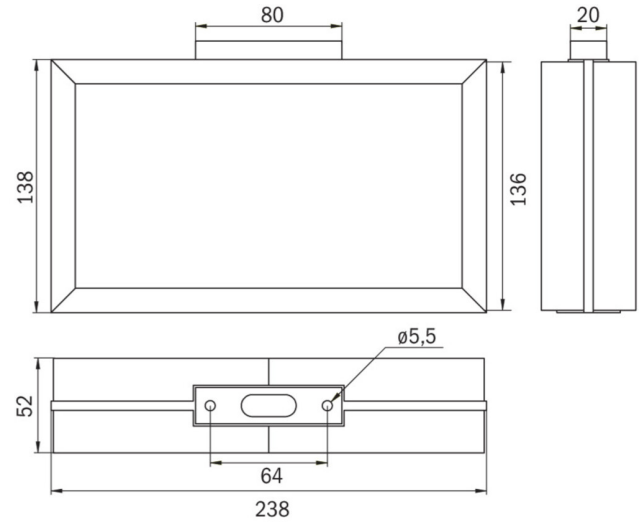

MMD_IP65

As of: 11.10.2024 - Subject to technical changes and errors.