



Art.-Nr: MMD403SC-AZ Exit sign Recessed mounting, SelfControl (SC), 3 h, 21 m, IP40, Zinc die-cast, Anthracite

Slim, high-quality, zinc die-cast emergency exit sign luminaire with a modern design for ceiling mounting. Suited to inscription on one or two sides.

Automatic monitoring of safety luminaire with SelfControl. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.





More information

www.rp-group.com/en/item/MMD403SC-



TECHNICAL DATA


| Luminaire type | Exit sign |
|------------------------|----------------------|
| Mounting | Recessed mounting |
| Recognition distance | 21 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Anthracite |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE |
| Insulation class | 1 |
| Monitoring | SelfControl (SC) |
| Bridging time | 3 h |
| Battery | LiFePO4 6,4 V/1,2 Ah |
| Power max. | 4,3 W |
| Power DS | 3,4 W |
| Power BS | 0,9 W |






| Ambient temperature DS | -5 °C - 40 °C |
|------------------------|---------------|
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 52 mm |
| Width | 236 mm |
| Height | 138 mm |
| Weight | 0.15 |
| Weight incl. packaging | 0.15 |
| Customs tariff number | 94056180 |
| EAN | 4260766556562 |

TECHNICAL DRAWING

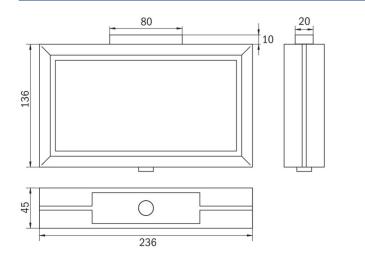

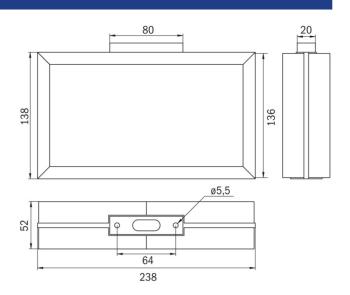

MMD_IP65

As of: 11.10.2024 - Subject to technical changes and errors.