



**Art.-Nr: PFD019**

**Exit sign Centralised power supply systems  
Recessed mounting, Without monitoring, CPS, 24 m, IP65,  
Plastic, white**

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information

[www.rp-group.com/en/item/PFD019](http://www.rp-group.com/en/item/PFD019)



**TECHNICAL DATA**


Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, CNBOP, ENEC, D-Sign
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltageAC	230 V



Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,5 W
Power DS	4,5 W
Power BS	0 W
Ambient temperature DS	-25 °C - 40 °C
Ambient temperature BS	-25 °C - 40 °C
Depth	152 mm
Width	370 mm
Height	195 mm
Weight	0.9
Weight incl. packaging	1.03
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	300 lm
Luminous flux emergency	300 lm
Customs tariff number	94056120
EAN	4260123683788



## TECHNICAL DRAWING

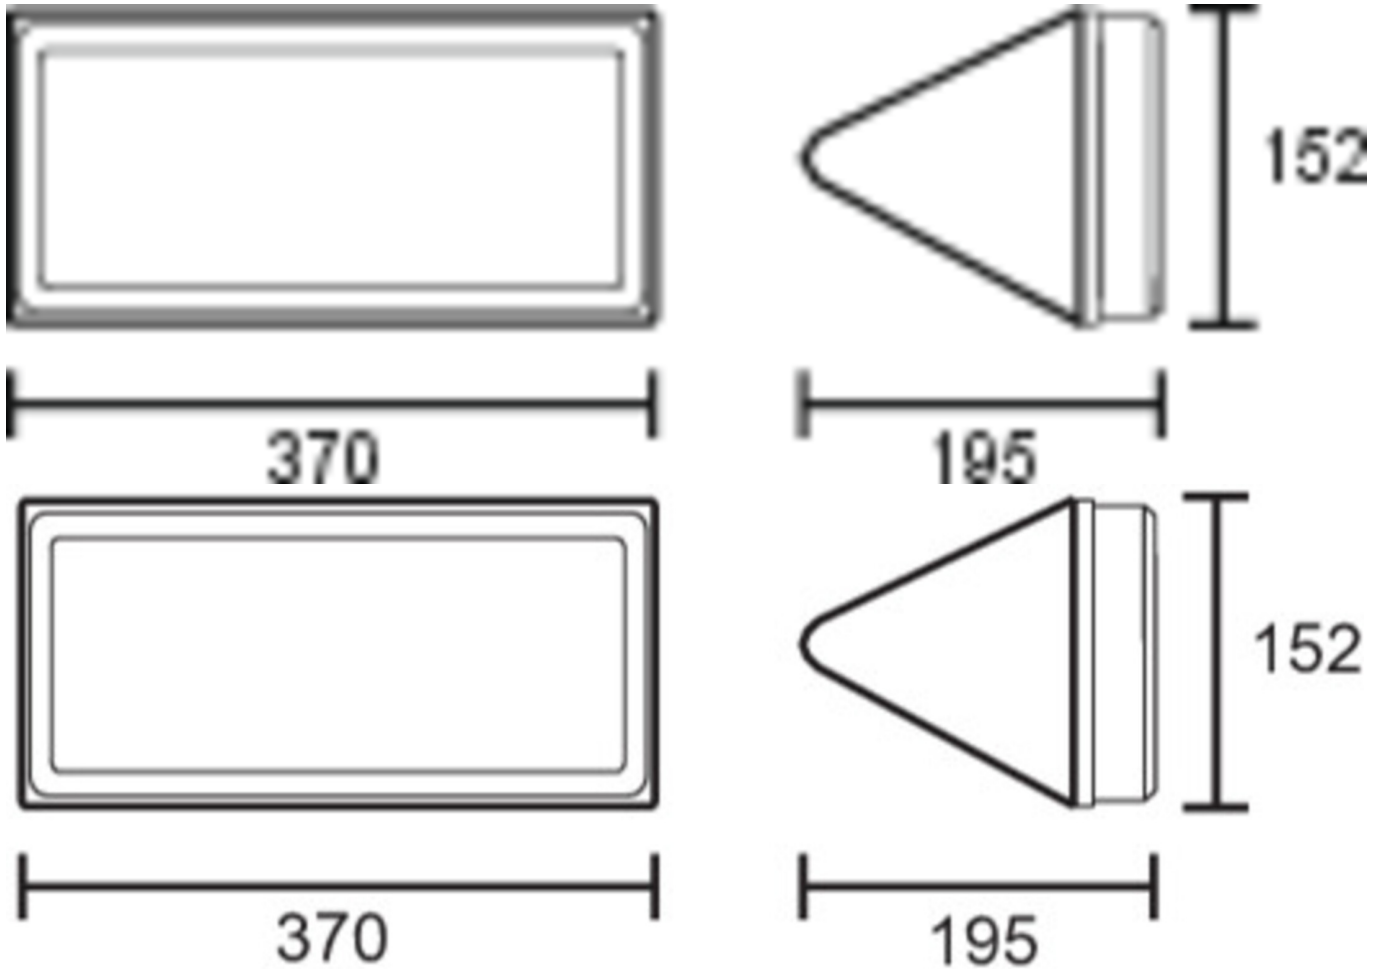

## ACCESSORY LIST

2PW-EB - Pendant  
2DW-EB -  
DSA - Wire suspension  
PFER -

As of: 11.10.2024 - Subject to technical changes and errors.