



Art.-Nr: PFD019ML **Exit sign Centralised power supply systems** Recessed mounting, Central power supply (ML), CPS, 24 m, IP65, Plastic, white

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Control and monitoring via central power supply system. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.













www.rp-group.com/en/item/PFD019ML



TECHNICAL DATA

Luminaire type	Exit sign				
Mounting	Recessed mounting				
Recognition distance	24 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Plastic				
Housing color	white				
Protection type (IP)	IP65				
Impact resistance (IK)	6				
Certification	WEEE, CE, CNBOP, ENEC, D-Sign				
Insulation class	1				
Supply	Centralised power supply systems				
Monitoring	Central power supply (ML)				
Bridging time	CPS				
Battery	/				
Operating mode	single luminaire switching				
Input voltageAC	230 V				






Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	5,2 W
Power DS	5,2 W
Power BS	1,1 W
Ambient temperature DS	-20 °C - 40 °C
Ambient temperature BS	-20 °C - 40 °C
Depth	152 mm
Width	370 mm
Height	195 mm
Weight	0.93
Weight incl. packaging	1.06
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	300 lm
Luminous flux emergency	300 lm
Customs tariff number	94056120
EAN	4260123683849





TECHNICAL DRAWING

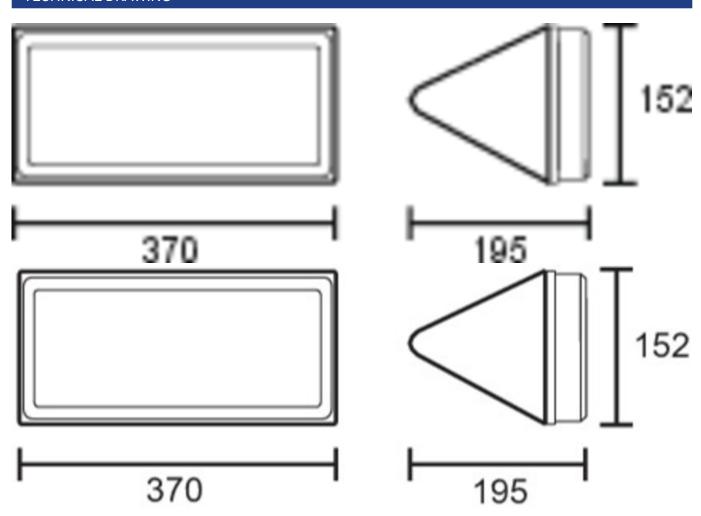

ACCESSORY LIST

2PW-EB - Pendant

2DW-EB-

DSA - Wire suspension

PFER -





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
PFD029ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
PFD519CC		CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central

As of: 11.10.2024 - Subject to technical changes and errors.