



**Art.-Nr: PFD411WL-TT**  
**Exit sign Single Battery**  
**Recessed mounting, Wireless Professional (WL), 1 h, 24 m,**  
**IP65, Plastic, white**

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information  
[www.rp-group.com/en/item/PFD411WL-TT](http://www.rp-group.com/en/item/PFD411WL-TT)



## TECHNICAL DATA


|                        |                                     |
|------------------------|-------------------------------------|
| Luminaire type         | Exit sign                           |
| Mounting               | Recessed mounting                   |
| Recognition distance   | 24 m                                |
| Pictograph             | Set                                 |
| Illuminant             | LED                                 |
| Housing material       | Plastic                             |
| Housing color          | white                               |
| Protection type (IP)   | IP65                                |
| Impact resistance (IK) | 6                                   |
| Certification          | WEEE, CE, D-Sign                    |
| Insulation class       | 1                                   |
| Supply                 | Single Battery                      |
| Monitoring             | Wireless Professional (WL)          |
| Bridging time          | 1 h                                 |
| Battery                | /                                   |
| Operating mode         | Standby circuit / permanent circuit |
| Input voltageAC        | 230 V                               |



|                          |                     |
|--------------------------|---------------------|
| Input frequency          | 50 Hz               |
| Power max.               | 5,5 W               |
| Power DS                 | 3,6 W               |
| Power BS                 | 0,7 W               |
| Ambient temperature DS   | -15 °C - 40 °C      |
| Ambient temperature BS   | -15 °C - 40 °C      |
| Depth                    | 152 mm              |
| Width                    | 370 mm              |
| Height                   | 195 mm              |
| Weight                   | 0.92                |
| Weight incl. packaging   | 1.05                |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | Yes                 |
| Battery connection       | Connector           |
| Dimming function         | Yes                 |
| EAN                      | 4260766558344       |



## TECHNICAL DRAWING

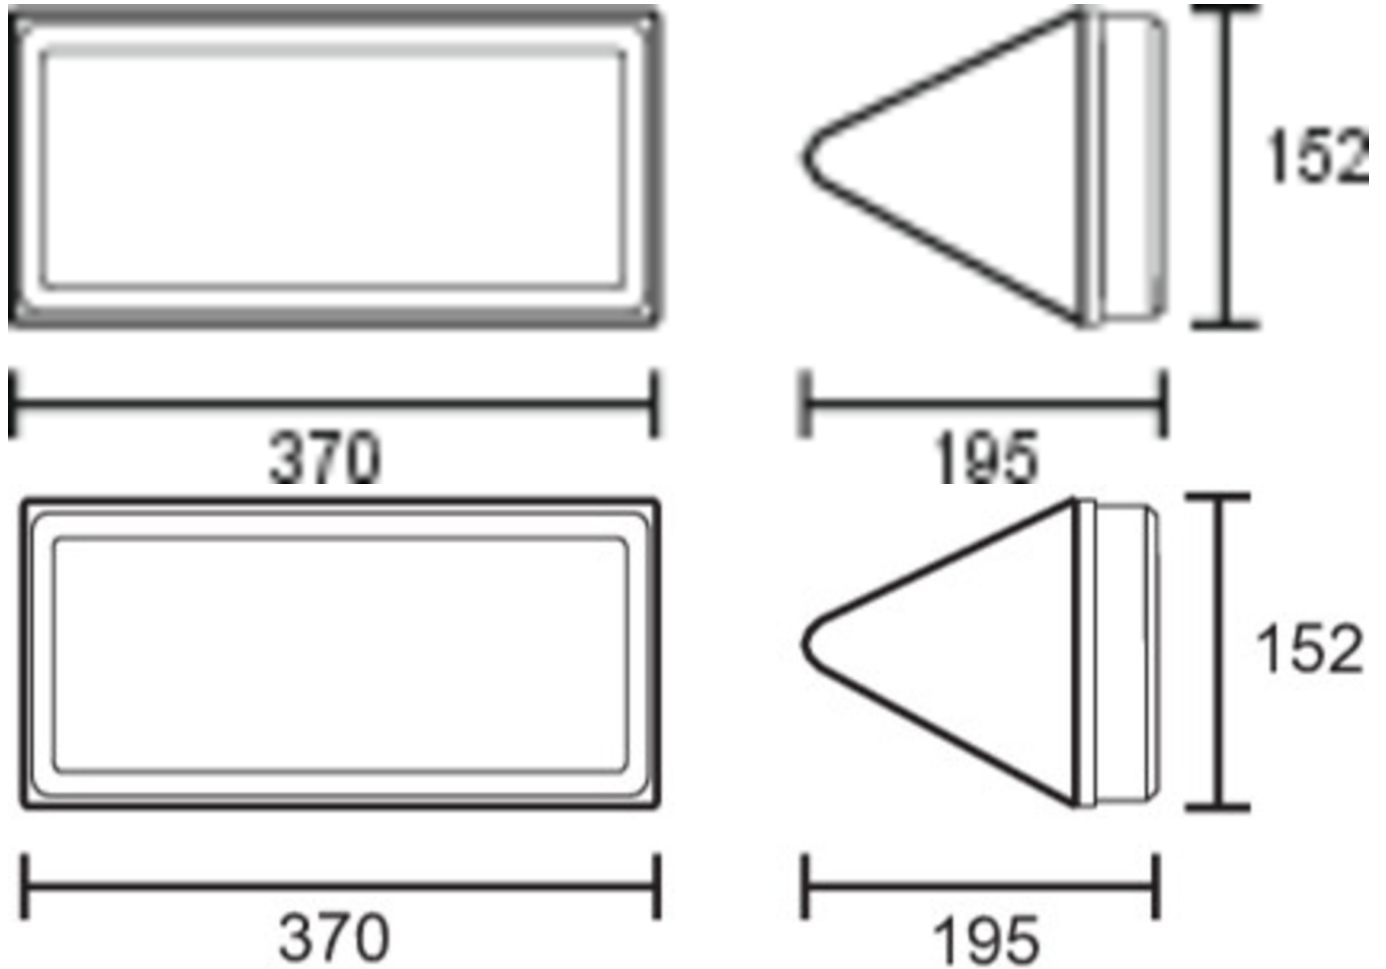

## ACCESSORY LIST

2PW-EB - Pendant  
2DW-EB -  
DSA - Wire suspension  
PFER -

As of: 11.10.2024 - Subject to technical changes and errors.