



Art.-Nr: PFD519CC

Exit sign Centralised power supply systems

Recessed mounting, CoreCompact 24 (CC), CPS, 24 m, IP65, Plastic, white

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Control and monitoring via central 24 V low-power system. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information

www.rp-group.com/en/item/PFD519CC



TECHNICAL DATA


| | |
|------------------------|-------------------------------------|
| Luminaire type | Exit sign |
| Mounting | Recessed mounting |
| Recognition distance | 24 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | WEEE, CE, D-Sign |
| Insulation class | 3 |
| Supply | Centralised power supply systems |
| Monitoring | CoreCompact 24 (CC) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Standby circuit / permanent circuit |
| Input voltageAC | 24 V |



| | |
|--------------------------|---------------------|
| Power max. | 4,2 W |
| Power DS | 4,2 W |
| Power BS | 0,4 W |
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 152 mm |
| Width | 370 mm |
| Height | 195 mm |
| Weight | 0.85 |
| Weight incl. packaging | 0.98 |
| Connection cross-section | 2.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Luminous flux mains | 335 lm |
| Luminous flux emergency | 335 lm |
| Customs tariff number | 94056120 |
| EAN | 4260682157492 |



TECHNICAL DRAWING

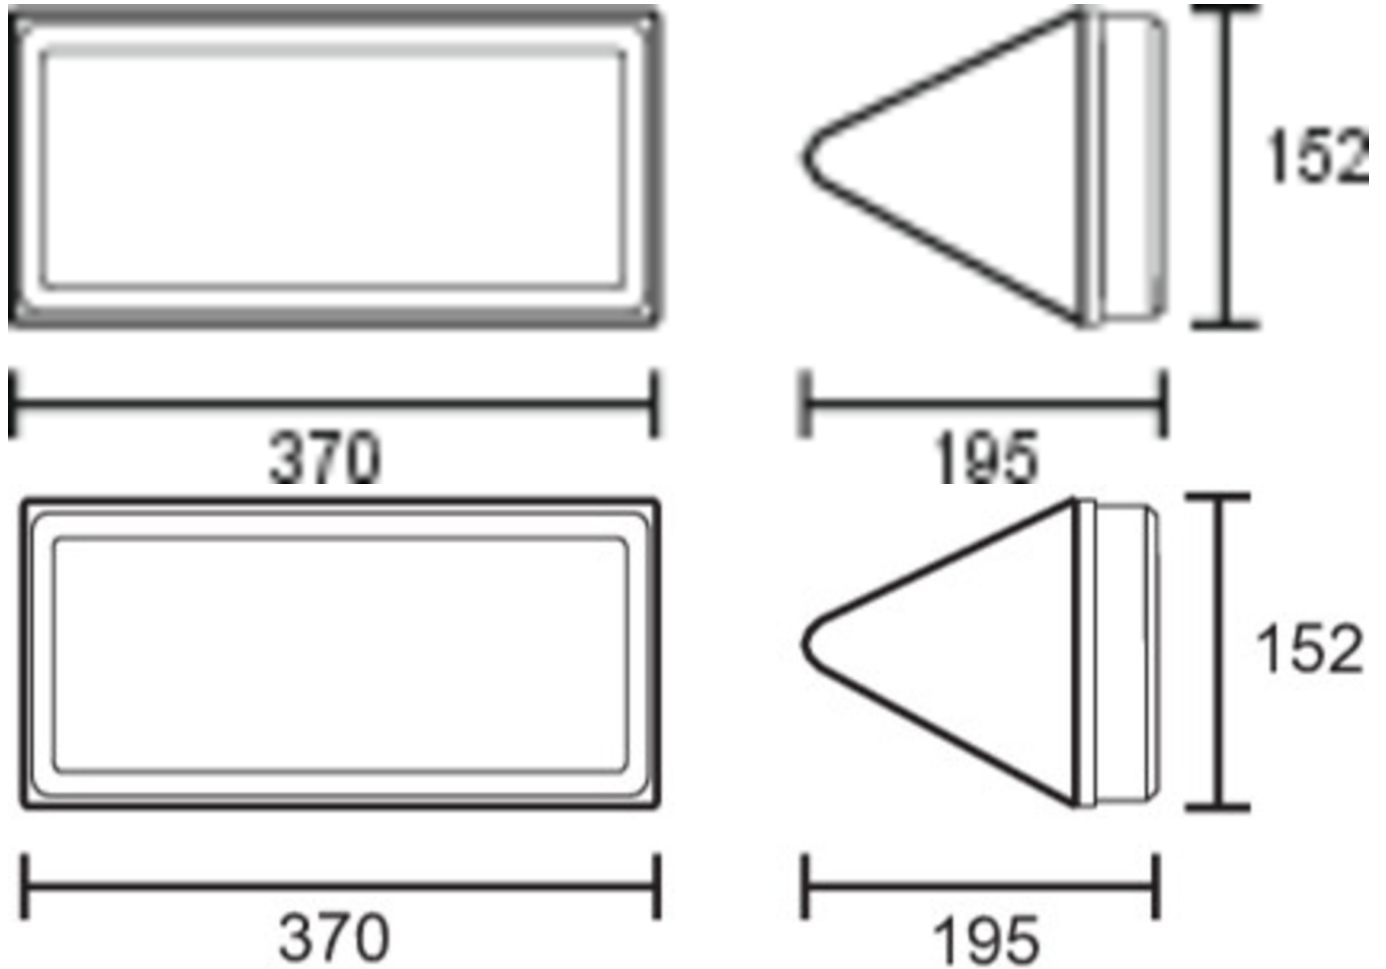

ACCESSORY LIST

2PW-EB - Pendant
2DW-EB -
DSA - Wire suspension
PFER -



RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|----------|---|---------------------------|----------------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| PFD019ML |  | Central power supply (ML) | Central power supply | RAL 9003 | €€€ | Yes | low | Yes | 1,920 per system | central |
| PFD029ML |  | Central power supply (ML) | Central power supply | RAL 9003 | €€€ | Yes | low | Yes | 1,920 per system | central |

As of: 11.10.2024 - Subject to technical changes and errors.