




Art.-Nr: PMW039

**Safety luminaire Centralised power supply systems
Universal, CPS, CPS, , IP65, Plastic, white**

Polycarbonate LED emergency light with convex shaped hood for ceiling or wall mounting. Suitable for continuous or standby mode. For ease of installation, levelling screws are integrated to compensate for uneven surfaces.

The innovative integrated lens carrier with quick-mounting device enables the flexible use of different lens types depending on the application. The most versatile application in this luminaire has the corridor lens, which is already mounted. If necessary, the lenses can be easily replaced by lenses with the desired light distribution characteristics. With this flexibility, it is easy to adapt the luminaire to the installation situation.

In accordance to EN 60598-1, EN 60598-2-22 and EN 1838.

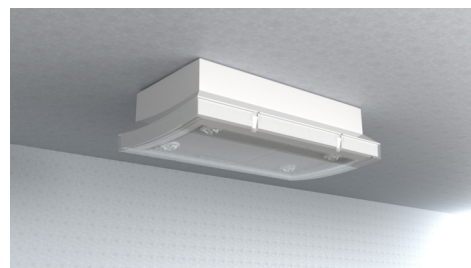

[More information](#)



TECHNICAL DATA


Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CPS
Bridging time	CPS
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	9 W



Power DS	9 W
Power BS	0 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.64
Weight incl. packaging	0.77
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	780 lm
Luminous flux emergency	780 lm
Customs tariff number	94056120
EAN	4260766551789



TECHNICAL DRAWING

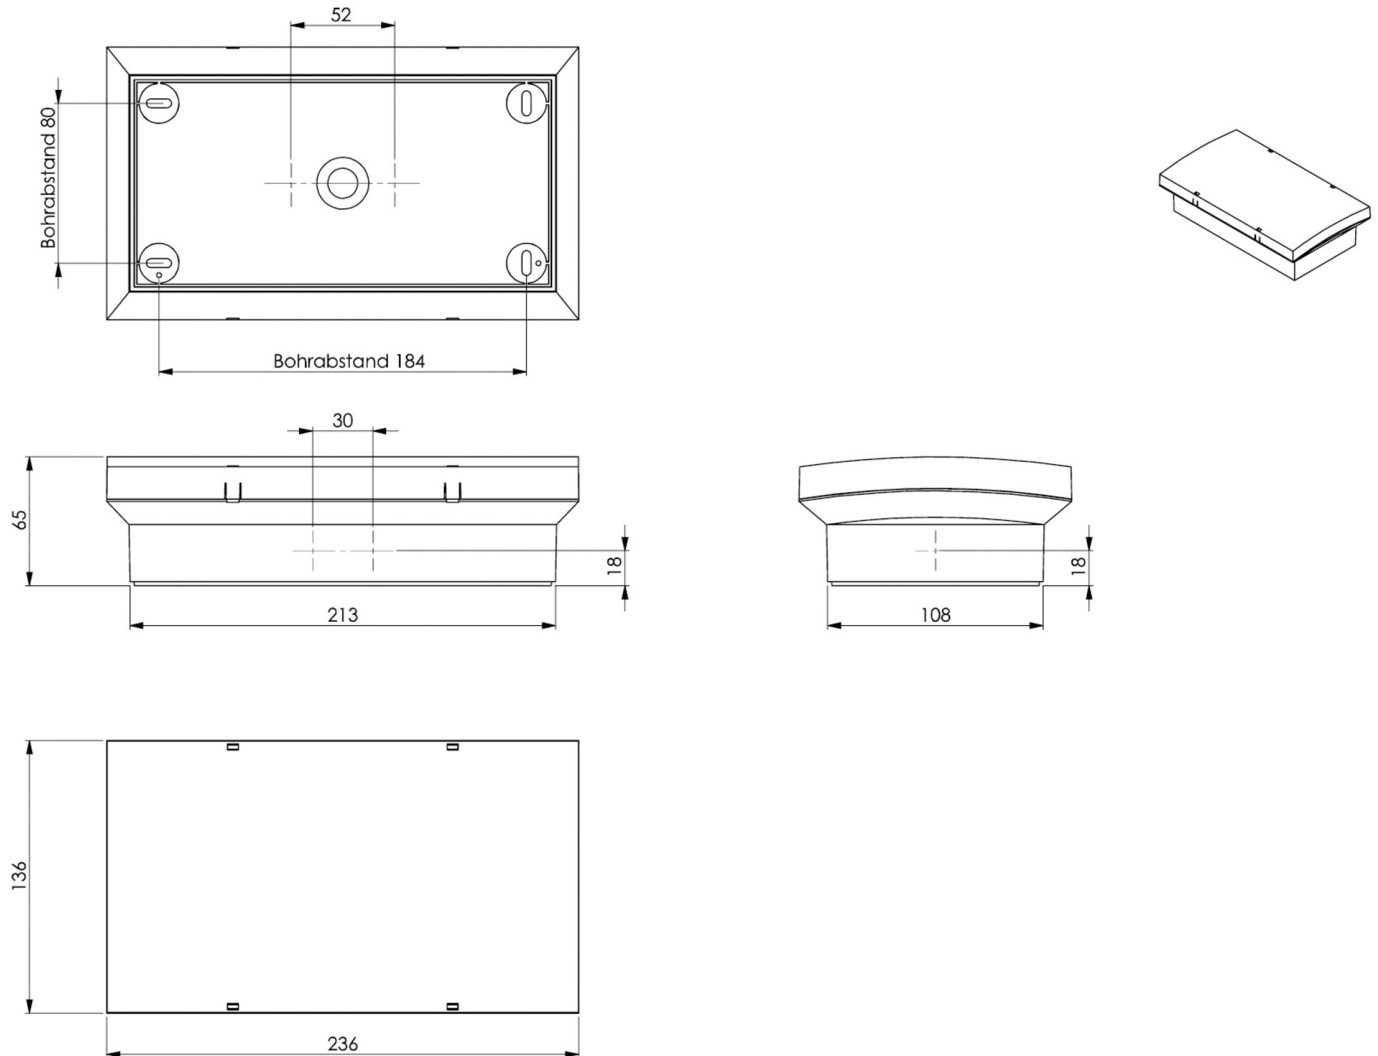

ACCESSORY LIST

LSYS-B4 -
LSYS-F4 -
LSYS-H4 -
LSYS-R4 -
LSYS-S4 -

As of: 10.07.2024 - Subject to technical changes and errors.