




Art.-Nr: PMW423SC-TT
Safety luminaire Supply
Universal, SelfControl, 3 h, , IP65, Plastic, white

Polycarbonate LED emergency light with convex shaped hood for ceiling or wall mounting. Suitable for continuous or standby mode. For ease of installation, levelling screws are integrated to compensate for uneven surfaces.

The innovative integrated lens carrier with quick-mounting device enables the flexible use of different lens types depending on the application. The most versatile application in this luminaire has the corridor lens, which is already mounted. If necessary, the lenses can be easily replaced by lenses with the desired light distribution characteristics. With this flexibility, it is easy to adapt the luminaire to the installation situation.

In accordance to EN 60598-1, EN 60598-2-22 and EN 1838.

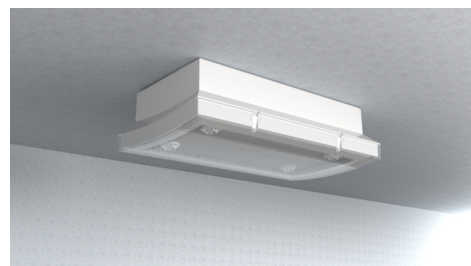

[More information](#)





TECHNICAL DATA

| | |
|------------------------|------------------|
| Luminaire type | Safety luminaire |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | CE, WEEE, D-Sign |
| Insulation class | 2 |
| Monitoring | SelfControl |
| Bridging time | 3 h |
| Power max. | 6,7 W |
| Power DS | 5,4 W |
| Power BS | 0,9 W |
| Ambient temperature DS | -15 °C - 40 °C |
| Ambient temperature BS | -15 °C - 40 °C |
| Depth | 65 mm |



| | |
|-------------------------|---------------|
| Width | 236 mm |
| Height | 136 mm |
| Weight | 0.7 |
| Weight incl. packaging | 0.83 |
| Luminous flux mains | 500 lm |
| Luminous flux emergency | 500 lm |
| Customs tariff number | 94056180 |
| EAN | 4260766557781 |

TECHNICAL DRAWING

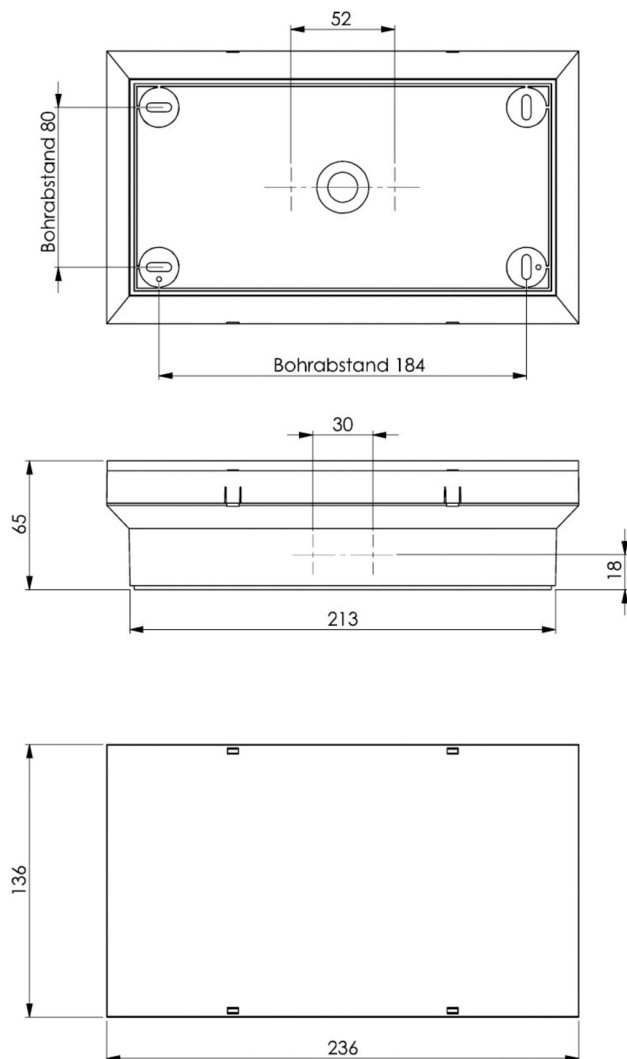



ACCESSORY LIST

LSYS-B4 -

LSYS-F4 -

LSYS-H4 -

LSYS-R4 -

LSYS-S4 -

As of: 10.07.2024 - Subject to technical changes and errors.