



Art.-Nr: PMW423SC

Exit sign Supply

Wall, SelfControl, 3 h, 20 m, IP65, Plastic, white

Polycarbonate LED exit sign with convex shaped hood for ceiling or wall mounting. Suitable for continuous or standby mode. For ease of installation, levelling screws are integrated to compensate for uneven surfaces. Planning safety is ensured by tool-free, variable use of the pictograms on site. The pictograms are internal and are inserted solvent-free. The pictogram set (MTL, MTR and 2x arrow straight) is included as standard.

In accordance to EN 60598-1, EN 60598-2-22, EN ISO 7010 and DIN EN 1838.



[More information](#)




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall
Recognition distance	20 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign
Insulation class	2
Monitoring	SelfControl
Bridging time	3 h
Power max.	6,7 W
Power DS	5,4 W
Power BS	0,9 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	65 mm
Width	236 mm



Height	136 mm
Weight	0.86
Weight incl. packaging	0.99
Luminous flux mains	500 lm
Luminous flux emergency	500 lm
Customs tariff number	94056120
EAN	4260766553684

TECHNICAL DRAWING

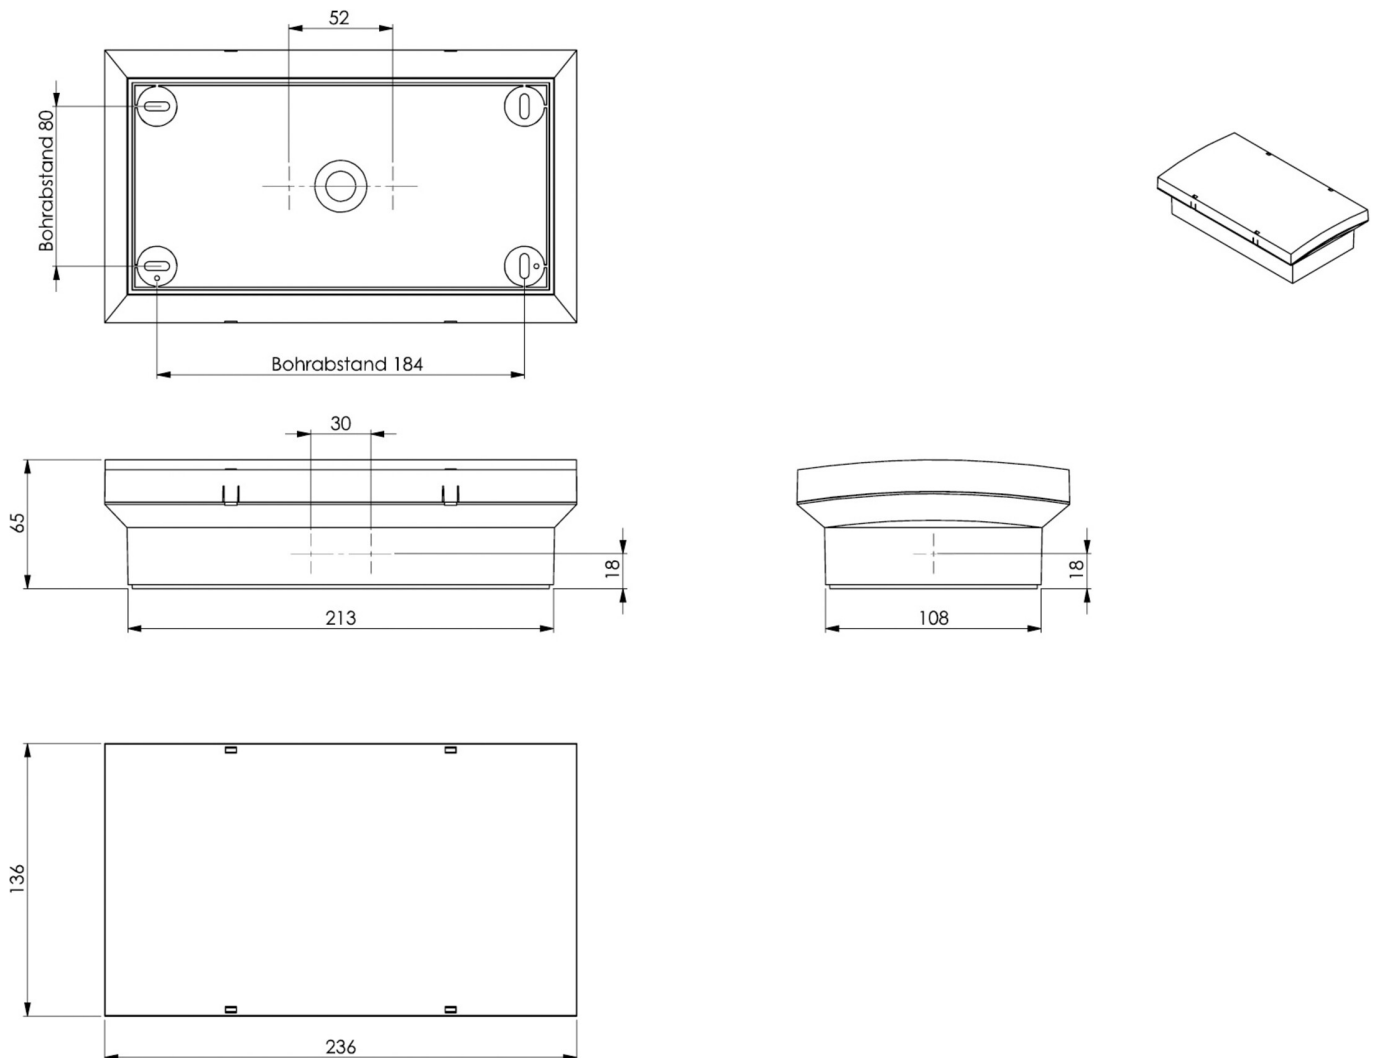



ACCESSORY LIST

LSYS-B4 -
LSYS-F4 -
LSYS-H4 -
LSYS-R4 -
LSYS-S4 -
LFP3233-SET-2AKKU - Technology Battery

As of: 10.07.2024 - Subject to technical changes and errors.