




Art.-Nr: PMW428WL
Safety luminaire Single Battery
Universal, Wireless Professional, 8 h , IP65, Plastic, white

Polycarbonate LED emergency light with convex shaped hood for ceiling or wall mounting. Suitable for continuous or standby mode. For ease of installation, levelling screws are integrated to compensate for uneven surfaces.

The innovative integrated lens carrier with quick-mounting device enables the flexible use of different lens types depending on the application. The most versatile application in this luminaire has the corridor lens, which is already mounted. If necessary, the lenses can be easily replaced by lenses with the desired light distribution characteristics. With this flexibility, it is easy to adapt the luminaire to the installation situation.

In accordance to EN 60598-1, EN 60598-2-22 and EN 1838.

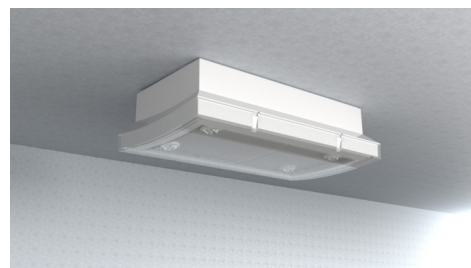

[More information](#)



TECHNICAL DATA


Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	8 h
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 Hz
Power max.	7,5 W
Power DS	5,7 W



Power BS	0,8 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.86
Weight incl. packaging	0.99
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	250 lm
Luminous flux emergency	245 lm
Customs tariff number	94056120
EAN	4260766552366



TECHNICAL DRAWING

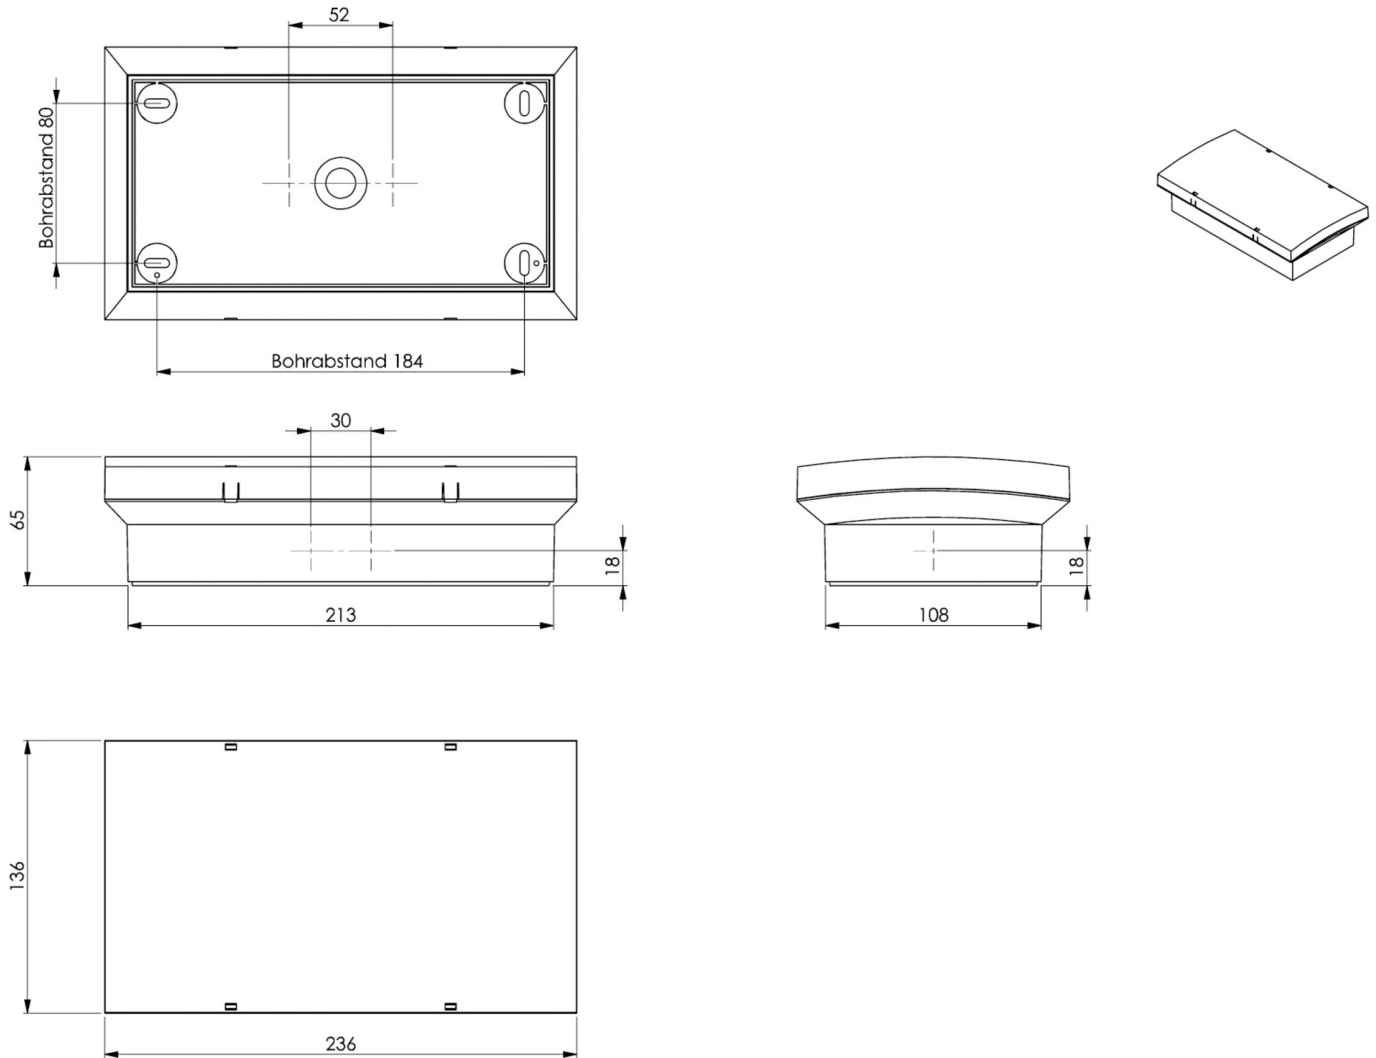

ACCESSORY LIST

LSYS-B4 -
LSYS-F4 -
LSYS-H4 -
LSYS-R4 -
LSYS-S4 -



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
PMW028SC		SelfControl	Single battery		€	no	high	no	unlimited	itself

As of: 10.07.2024 - Subject to technical changes and errors.