



Art.-Nr: PMW529CC

Safety luminaire

Universal, CoreCompact 24, , , IP65, Plastic, white

Polycarbonate LED emergency light with convex shaped hood for ceiling or wall mounting. Suitable for continuous or standby mode. For ease of installation, levelling screws are integrated to compensate for uneven surfaces.



The innovative integrated lens carrier with quick-mounting device enables the flexible use of different lens types depending on the application. The most versatile application in this luminaire has the corridor lens, which is already mounted. If necessary, the lenses can be easily replaced by lenses with the desired light distribution characteristics. With this flexibility, it is easy to adapt the luminaire to the installation situation.

In accordance to EN 60598-1, EN 60598-2-22 and EN 1838.



More information



TECHNICAL DATA


Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign
Insulation class	2
Monitoring	CoreCompact 24
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.6
Weight incl. packaging	0.73
Customs tariff number	94056120



EAN

4260766552014

TECHNICAL DRAWING

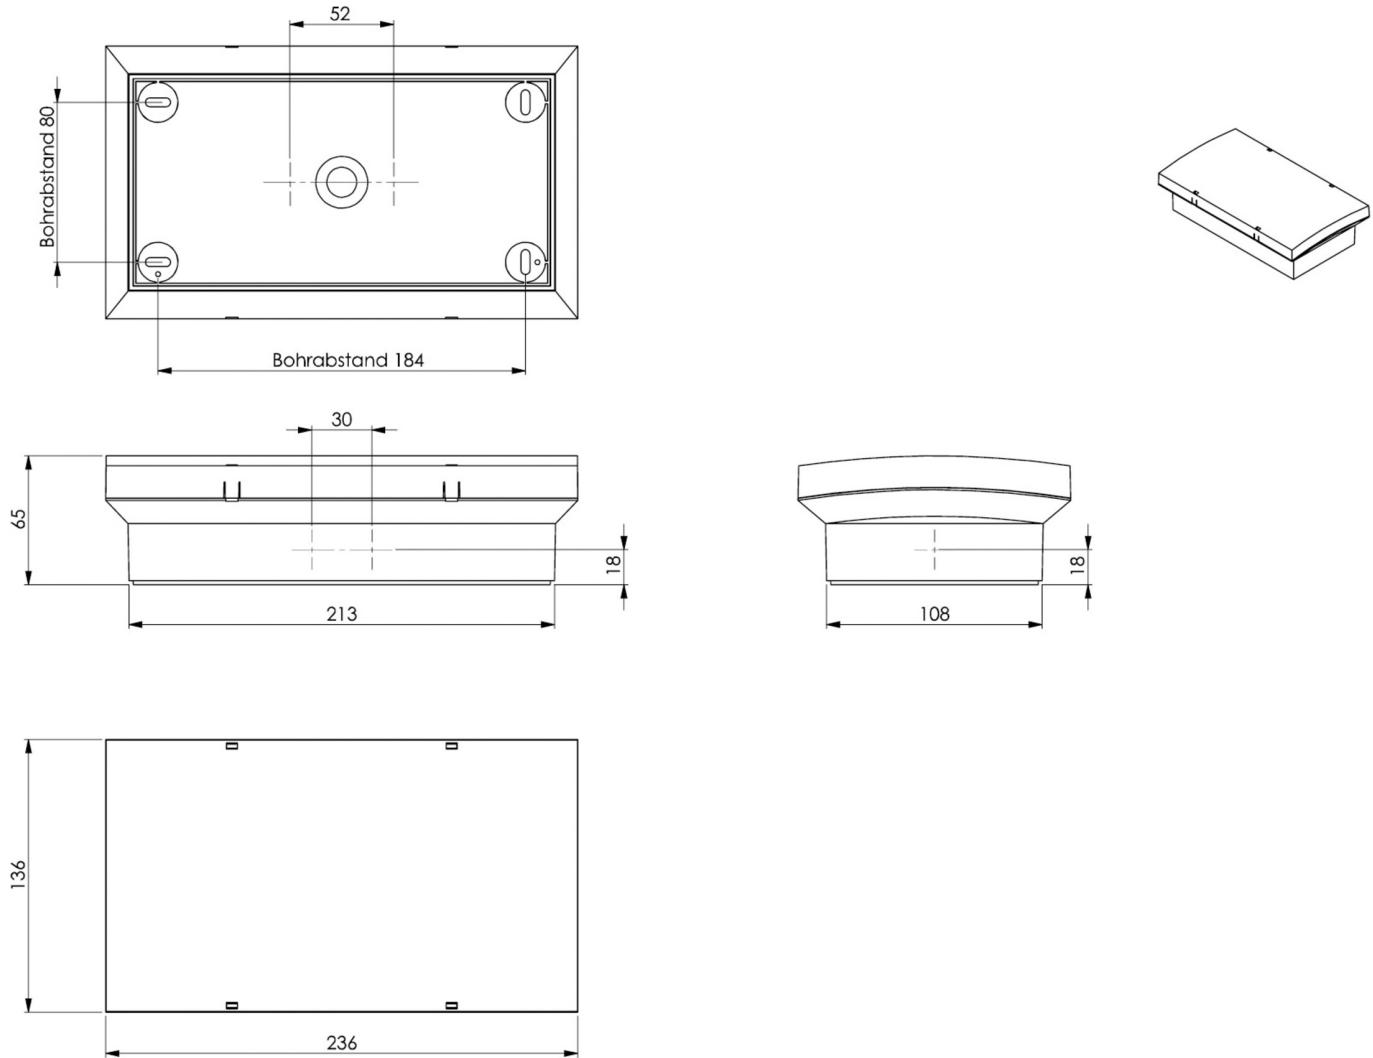

ACCESSORY LIST

LSYS-B4 -

LSYS-F4 -

LSYS-H4 -

LSYS-R4 -

LSYS-S4 -

As of: 10.07.2024 - Subject to technical changes and errors.