



Art.-Nr: QAW009ML

**General light, Safety luminaire Central power supply
Universal, ML, Central power supply, , IP20, Aluminium, white**

Round metal luminaire for general lighting and the lighting of escape and rescue route according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838.

This luminaire is designed for use with central battery systems. The LED-luminaire is operated with 26W, 1.600lm and light colour 4000 Kelvin. On mains failure the central battery system continues the supply of the emergency luminaire. On mains operation or failure the luminaire, supplied by the central battery system, operates at 100% luminous flux.



[More information](#)




TECHNICAL DATA

| | |
|------------------------|-------------------------------------|
| Luminaire type | General light, Safety luminaire |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Aluminium |
| Housing color | white |
| Protection type (IP) | IP20 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE |
| Insulation class | 1 |
| Supply | Central power supply |
| Monitoring | ML |
| Bridging time | Central power supply |
| Operating mode | Standby circuit / permanent circuit |
| Input voltage AC | 230 V |
| Input frequency | 50 Hz |
| Input voltage DC | 216 V |
| Power max. | 26 W |
| Power DS | 26 W |
| Power BS | 1,2 W |



| | |
|--------------------------|---------------------|
| Height | 113 mm |
| Diameter | 395 mm |
| Weight | 0.75 |
| Weight incl. packaging | 1.07 |
| Connection cross-section | 1.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | No |
| Luminous flux mains | 2300 lm |
| Luminous flux emergency | 2300 lm |
| Customs tariff number | 94056180 |
| Country of origin | DEUTSCHLAND |
| EAN | 4260581710842 |

TECHNICAL DRAWING

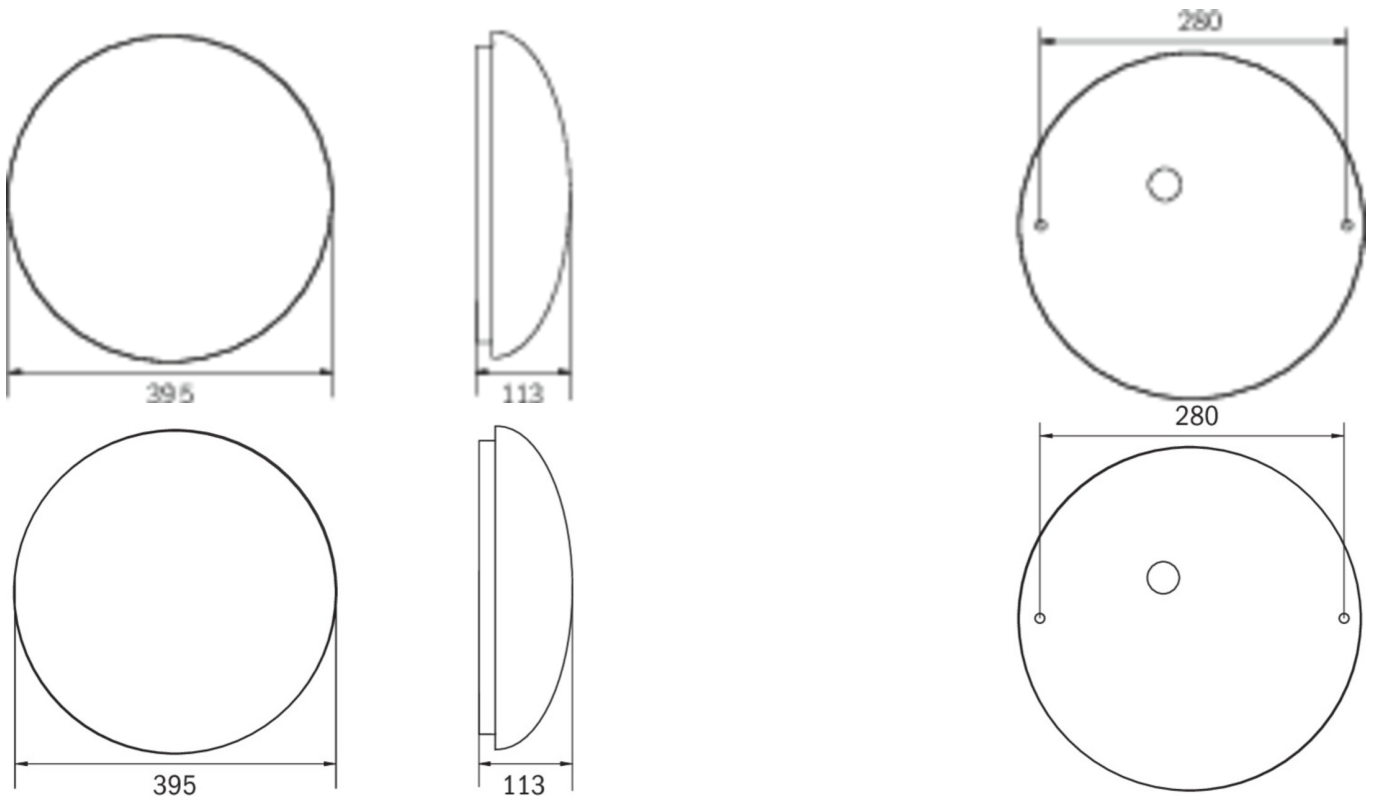

As of: 28.06.2024 - Subject to technical changes and errors.