



Art.-Nr: QAW029ML-SIWW

**Generelt lys, Sikkerhetslys sentral strømforsyning
Universell, ML, sentral strømforsyning, , IP20, aluminium,
Anodisert aluminium**

Round metal luminaire for general lighting and the lighting of escape and rescue route according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838.

This luminaire is designed for use with central battery systems. The LED-luminaire is operated with 26W, 1.600lm and light colour 4000 Kelvin. On mains failure the central battery system continues the supply of the emergency luminaire.



Mer informasjon




TEKNISKE DATA

Type armatur	Generelt lys, Sikkerhetslys
Monteringstype	Universell
piktogram	Nei
Lyspærer	LED
Koffertmateriale	aluminium
Farge på huset	Anodisert aluminium
IP-beskyttelse)	IP20
Slagstyrke (IK)	≥ 3
Sertifisering	Søppeltømming, CE
beskyttelses klasse	1
omsorg	sentral strømforsyning
overvåkning	ML
Brotid	sentral strømforsyning
Driftsmodus	Individuell lysveksling
Inngangsspenning AC	230 V
Inngangsfrekvens	50/60 Hz
Inngangsspenning DC	216 V
Maks effekt.	30,6 W
Ytelse DS	27,2 W
Ytelse BS	1,2 W



Høyde	113 mm
diameter	395 mm
Vekt	0.7
Vekt inkludert emballasje	1.02
Tverrsnitt for tilkobling	2.5 mm ²
Koblingsinngang	Nei
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Ja
Lysstrømnettverk	2300 lm
Lysstrøm nødsituasjon	360 lm
Tolltariffnummer	94056180
Opprinnelsesland	DEUTSCHLAND
EAN	4260659563509

TEKNISK TEGNING

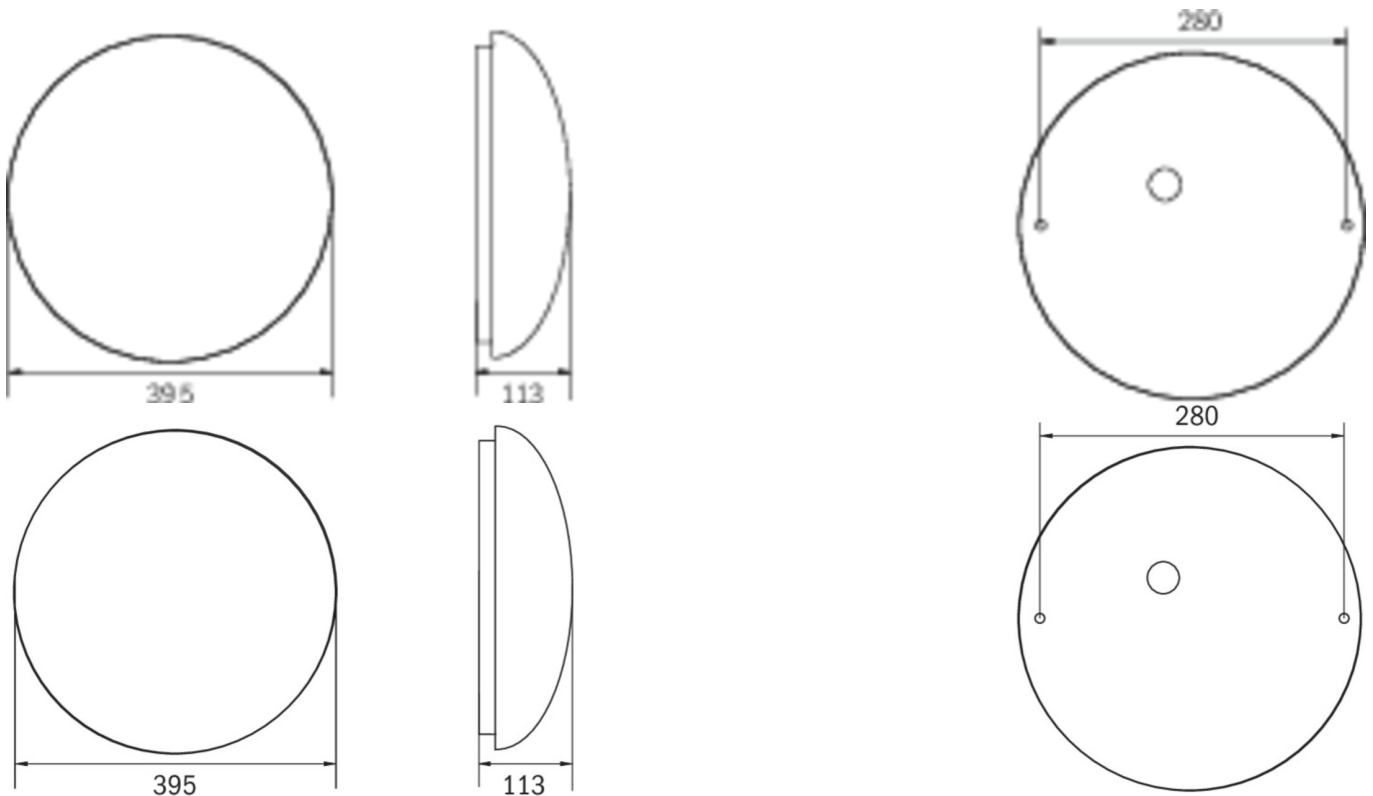

Fra: 28.06.2024 - Det tas forbehold om tekniske endringer og feil.