



**Art.-Nr: QAW403SC-SIWW**  
**General light, Safety luminaire Single Battery**  
**Universal, SelfControl, 3 h, , IP20, Aluminium, white**

Round metal luminaire for general lighting and the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. In mains operation the luminaire works with 26W / 1.600lm LED.



[More information](#)




## TECHNICAL DATA

|                        |                                     |
|------------------------|-------------------------------------|
| Luminaire type         | General light, Safety luminaire     |
| Mounting               | Universal                           |
| Pictograph             | No                                  |
| Illuminant             | LED                                 |
| Housing material       | Aluminium                           |
| Housing color          | white                               |
| Protection type (IP)   | IP20                                |
| Impact resistance (IK) | ≥ 3                                 |
| Certification          | Waste disposal, CE                  |
| Insulation class       | 1                                   |
| Supply                 | Single Battery                      |
| Monitoring             | SelfControl                         |
| Bridging time          | 3 h                                 |
| Operating mode         | Standby circuit / permanent circuit |
| Input voltageAC        | 230 V                               |
| Input frequency        | 50 / 60 Hz                          |
| Power max.             | 30 W                                |
| Power DS               | 28 W                                |
| Power BS               | 2 W                                 |
| Height                 | 113 mm                              |
| Diameter               | 395 mm                              |
| Weight                 | 0.787                               |



|                          |                     |
|--------------------------|---------------------|
| Weight incl. packaging   | 1.107               |
| Connection cross-section | 1.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | No                  |
| Battery connection       | Connector           |
| Dimming function         | No                  |
| Luminous flux mains      | 2300 lm             |
| Luminous flux emergency  | 360 lm              |
| Customs tariff number    | 94056180            |
| Country of origin        | DEUTSCHLAND         |
| EAN                      | 4260682159700       |

## TECHNICAL DRAWING

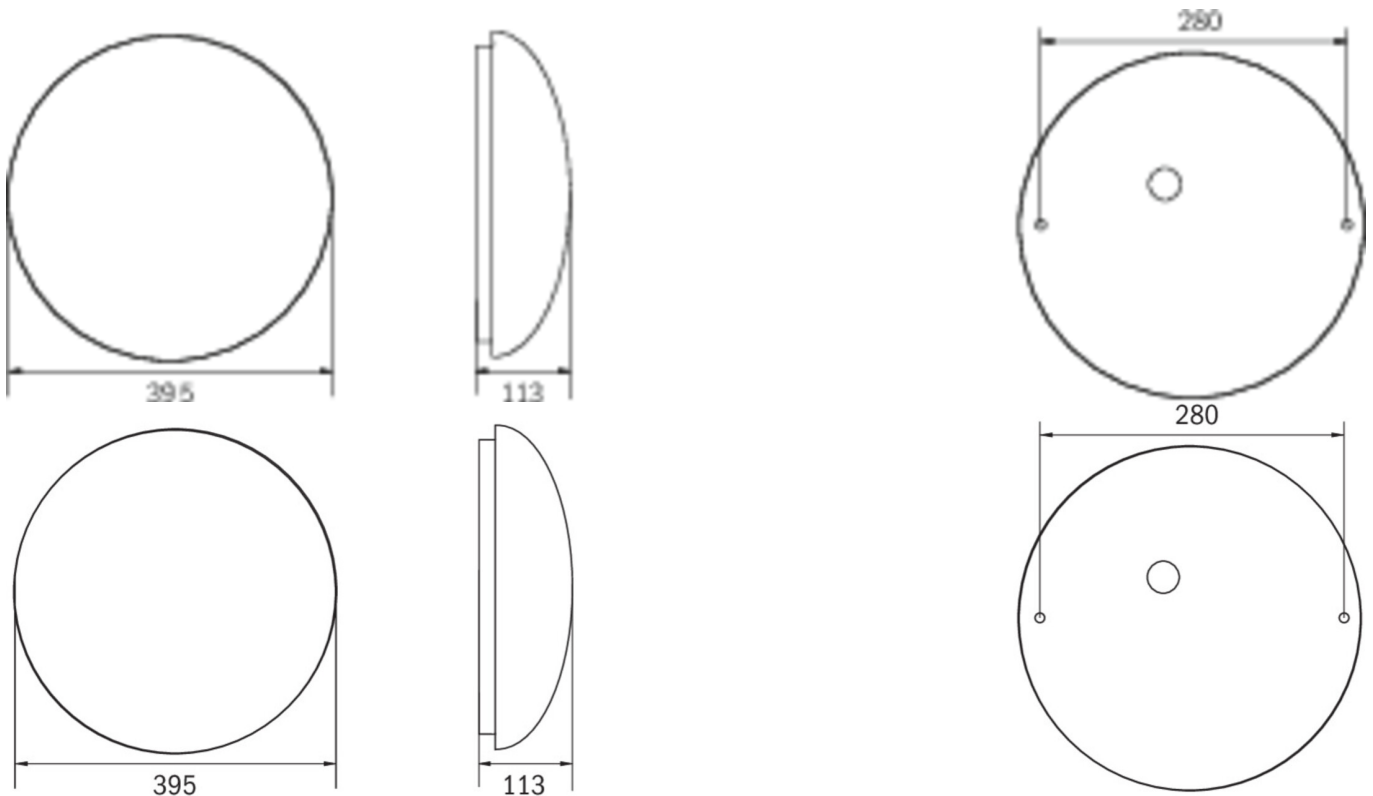

As of: 03.07.2024 - Subject to technical changes and errors.