



**Art.-Nr: QAW428WL-SI-BM**  
**General light, Safety luminaire Single Battery**  
**Universal, Wireless Professional, 8 h, , IP20, Aluminium,**  
**Anodised aluminium**

Round metal luminaire for general lighting and the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. In mains operation the luminaire works with 26W / 1.600lm LED. The general light is switched independently of the emergency light via the motion detector, which is not visible from the outside.



[More information](#)




## TECHNICAL DATA

Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Aluminium
Housing color	Anodised aluminium
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	1
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	8 h
Battery	LiFePO4 3,2 V / 3,3 Ah LiFePO4 - Lithium Iron Phosphate Battery
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Power max.	30 W
Power DS	26,4 W
Power BS	0,4 W
Height	113 mm



Diameter	395 mm
Weight	0.78
Weight incl. packaging	1.1
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	2300 lm
Luminous flux emergency	125 lm
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260682159991

## TECHNICAL DRAWING

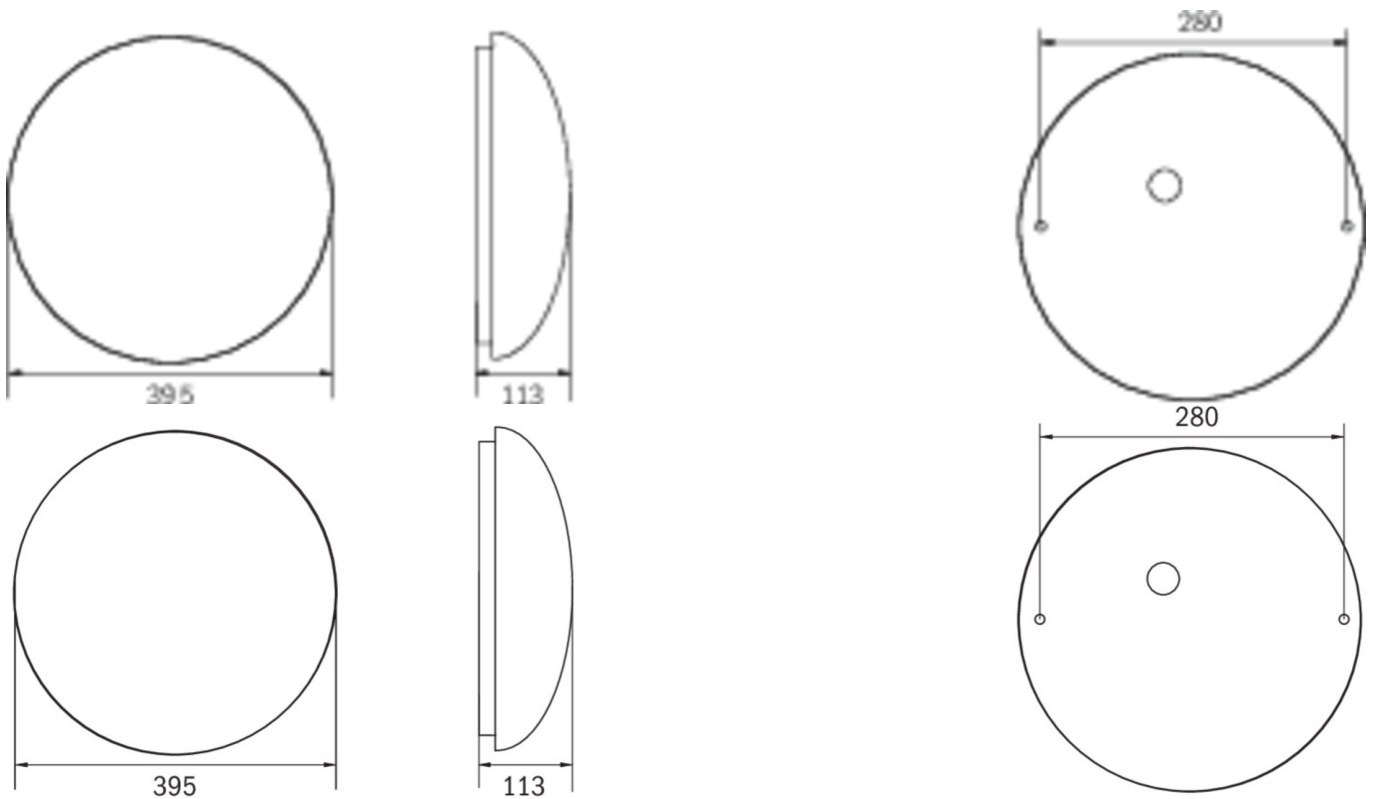

As of: 29.06.2024 - Subject to technical changes and errors.