



Art.-Nr: QCW009ML-AZ

**General light, Safety luminaire Central power supply
Universal, ML, Central power supply, , IP54, Zinc die-cast,
Anthracite**

Round die-cast aluminum luminaire for general lighting and illumination of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

Robust and timeless design, suitable for indoor and outdoor use. The emergency light LED can be unfolded tool-free during assembly e.g. for optimally illumination of the escape and rescue routes especially for wall mounting.



[More information](#)



TECHNICAL DATA

Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	Waste disposal, CE, D-Sign
Insulation class	1
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 Hz
Input voltage DC	216 V
Power max.	19 W
Power DS	17 W
Power BS	1,5 W



Height	106 mm
Diameter	363 mm
Weight	2.59
Weight incl. packaging	2.92
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	1600 lm
Luminous flux emergency	1600 lm
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260682141613




TECHNICAL DRAWING

QCW



QCW

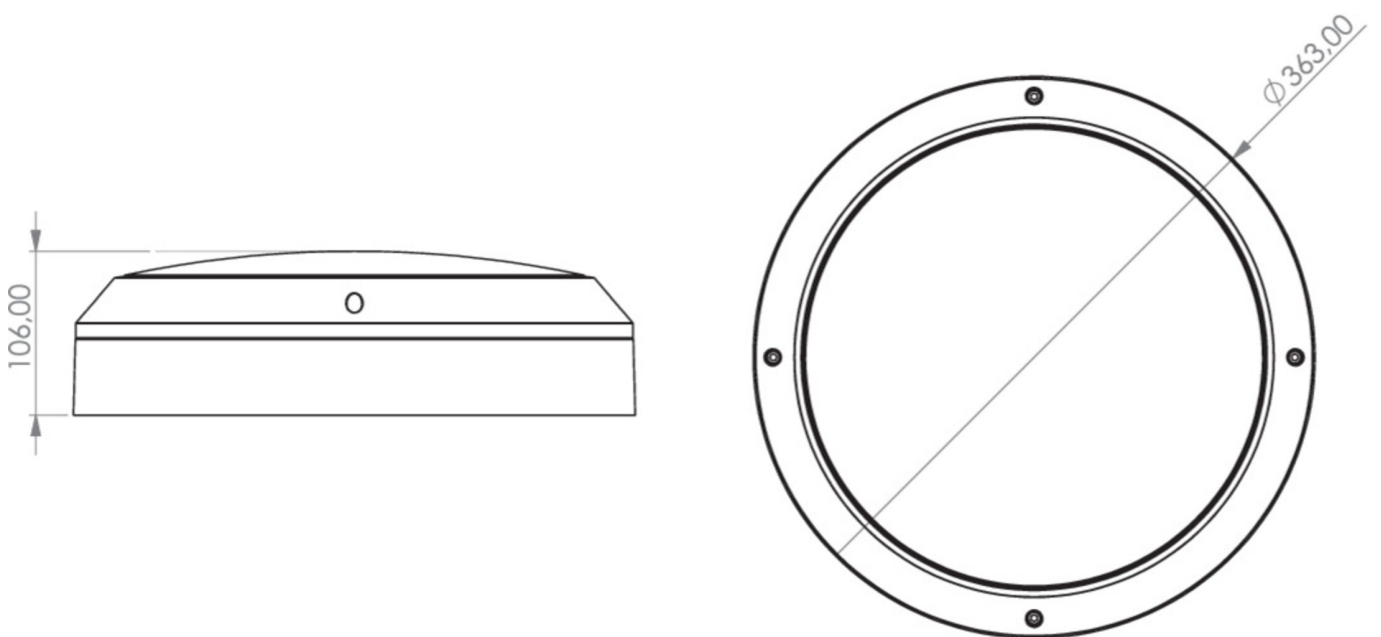



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
QCW009ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central

As of: 28.06.2024 - Subject to technical changes and errors.