



Art.-Nr: QCW029ML-AZ-BM

**General light, Safety luminaire Central power supply
Universal, ML, Central power supply, , IP54, Zinc die-cast,
Anthracite**

Round zinc die-cast luminaire for general lighting with integrated motion detector. For illumination of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

In robust construction and timeless design, suitable for indoor and outdoor use. The emergency LED can be folded out without tools during installation, e.g. for wall mounting, to provide optimum illumination of escape and rescue routes. The general lighting is switched independently of the emergency lighting via the motion detector, which is not visible from the outside.



[More information](#)



TECHNICAL DATA

Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	Waste disposal, CE, D-Sign
Insulation class	1
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	19 W



Power DS	17 W
Power BS	1,1 W
Height	106 mm
Diameter	363 mm
Weight	2.57
Weight incl. packaging	2.9
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	1600 lm
Luminous flux emergency	470 lm
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260682146359




TECHNICAL DRAWING

QCW



QCW

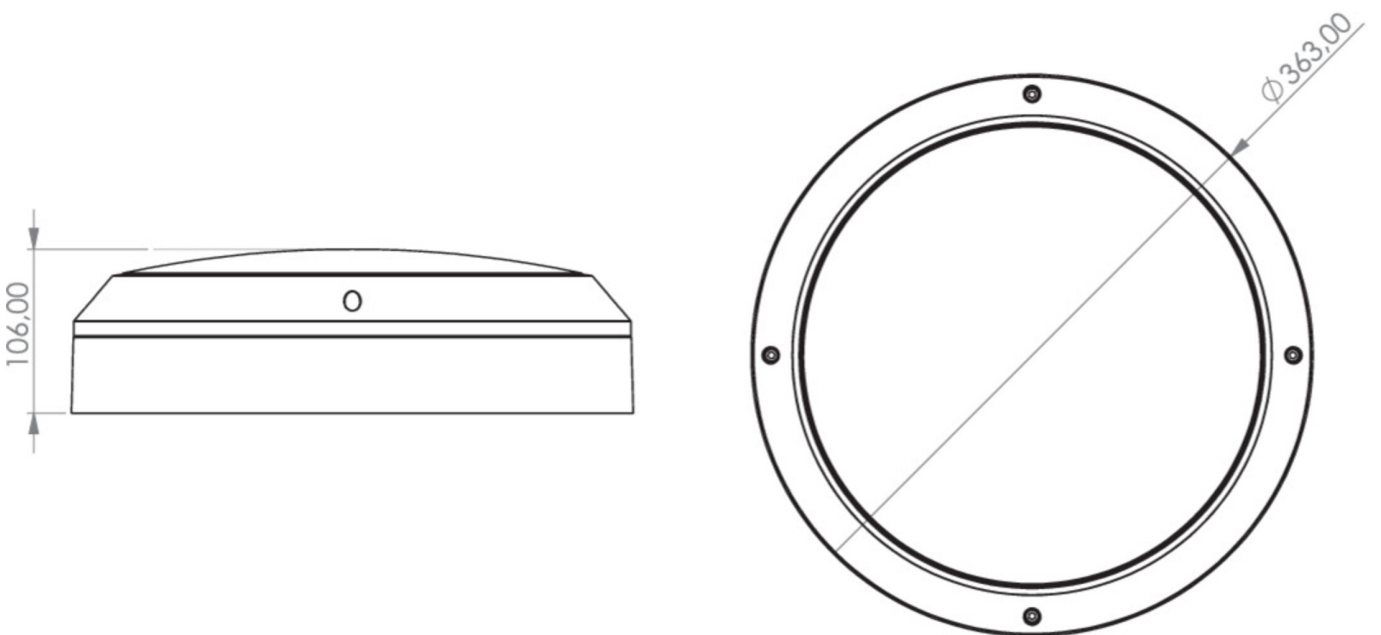

As of: 28.06.2024 - Subject to technical changes and errors.