



Art.-Nr: QCW029ML-BM

**Generelt lys, Sikkerhetslys sentral strømforsyning
Universell, ML, sentral strømforsyning, , IP54, Sinkstøping,
hvit**

Round zinc die-cast luminaire with integrated motion detector for general lighting and illumination of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

In robust construction and timeless design, suitable for indoor and outdoor use. The emergency LED can be folded out without tools during installation, e.g. for wall mounting to provide optimum illumination of escape and rescue routes.



Mer informasjon



TEKNISKE DATA

Type armatur	Generelt lys, Sikkerhetslys
Monteringstype	Universell
piktogram	Nei
Lyspærer	LED
Koffertmateriale	Sinkstøping
Farge på huset	hvit
IP-beskyttelse)	IP54
Slagstyrke (IK)	10
Sertifisering	Søppeltømming, CE, D-tegn
beskyttelses klasse	1
omsorg	sentral strømforsyning
overvåkning	ML
Brotid	sentral strømforsyning
Driftsmodus	Kontinuerlig veksling
Inngangsspenning AC	230 V
Inngangsfrekvens	50 Hz
Inngangsspenning DC	216 V
Maks effekt.	19,5 W
Ytelse DS	17,5 W
Ytelse BS	2 W




Høyde	106 mm
diameter	363 mm
Vekt	2.59
Vekt inkludert emballasje	2.92
Tverrsnitt for tilkobling	1.5 mm ²
Koblingsinngang	Nei
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Nei
Lysstrømnettverk	1600 lm
Lysstrøm nødsituasjon	1600 lm
Tolltariffnummer	94056180
Opprinnelsesland	DEUTSCHLAND
EAN	4260682146137




TEKNISK TEGNING

QCW

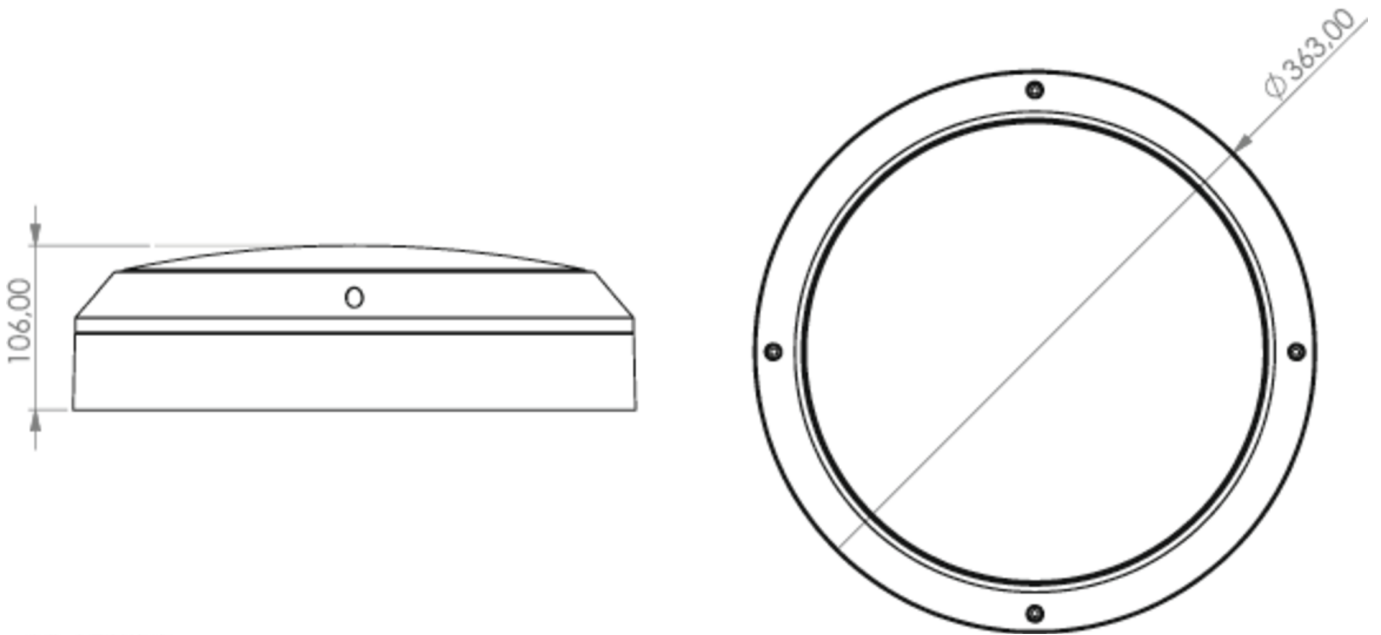

QCW

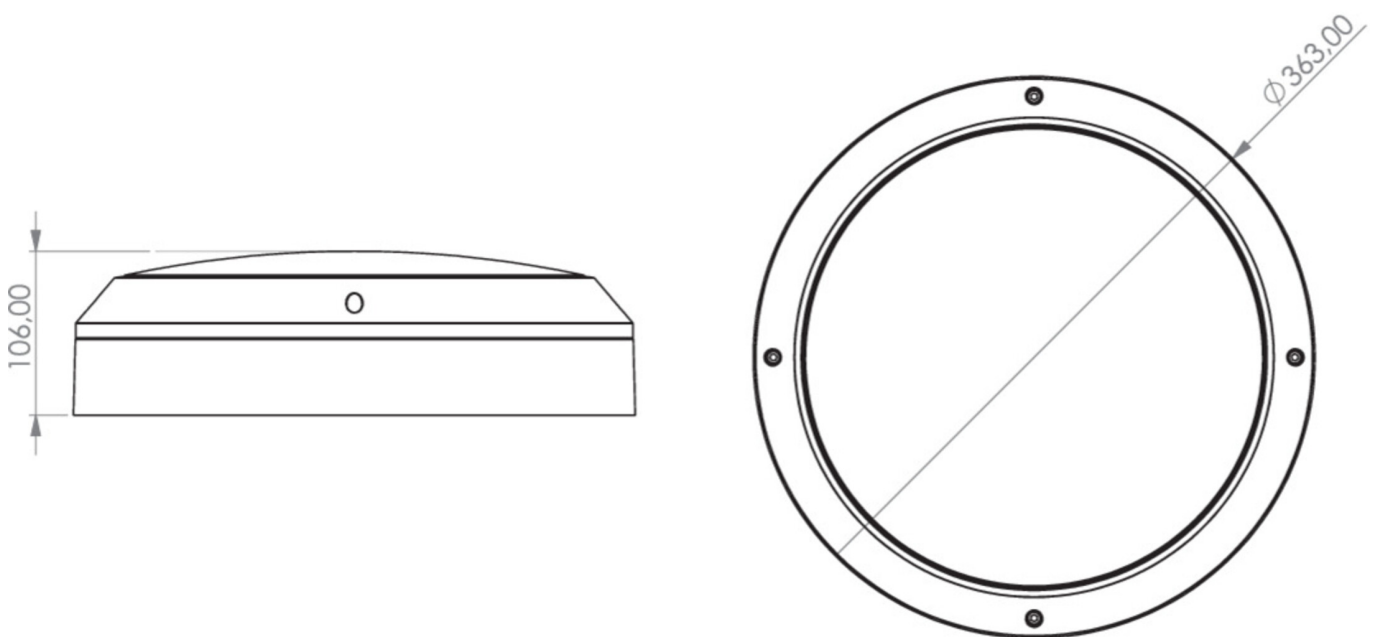

Fra: 28.06.2024 - Det tas forbehold om tekniske endringer og feil.