



Art.-Nr: QCW423SC-AZ-BM

General light, Safety luminaire

Universal, SelfControl, , , IP54, Zinc die-cast, Anthracite

Round zinc die-cast luminaire for general lighting with integrated motion detector. For illumination of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.



In robust construction and timeless design, suitable for indoor and outdoor use. The emergency LED can be folded out without tools during installation, e.g. for wall mounting, to provide optimum illumination of escape and rescue routes. The general lighting is switched independently of the emergency lighting via the motion detector, which is not visible from the outside.



More information





TECHNICAL DATA

Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	WEEE, CE, D-Sign
Insulation class	1
Monitoring	SelfControl
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Height	106 mm
Diameter	363 mm
Weight	2.5
Weight incl. packaging	2.83
Customs tariff number	94056180
EAN	4260766559372





TECHNICAL DRAWING

QCW

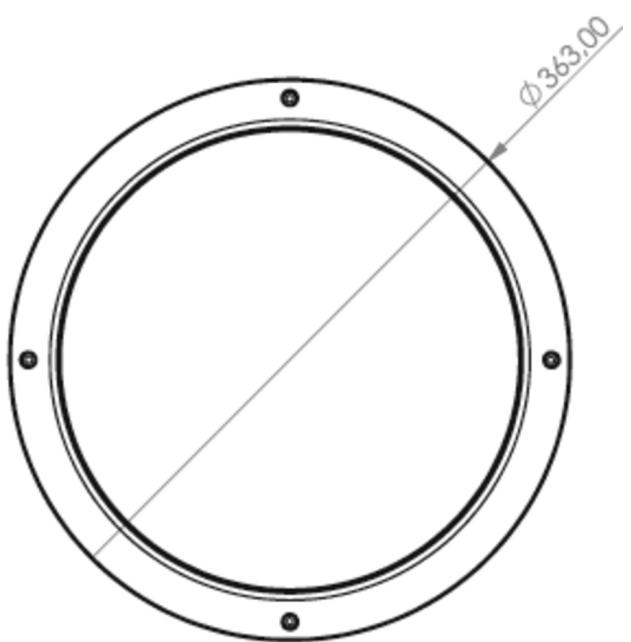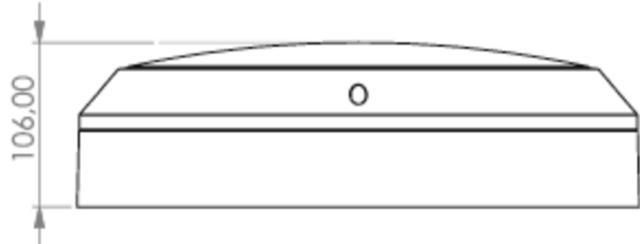

QCW

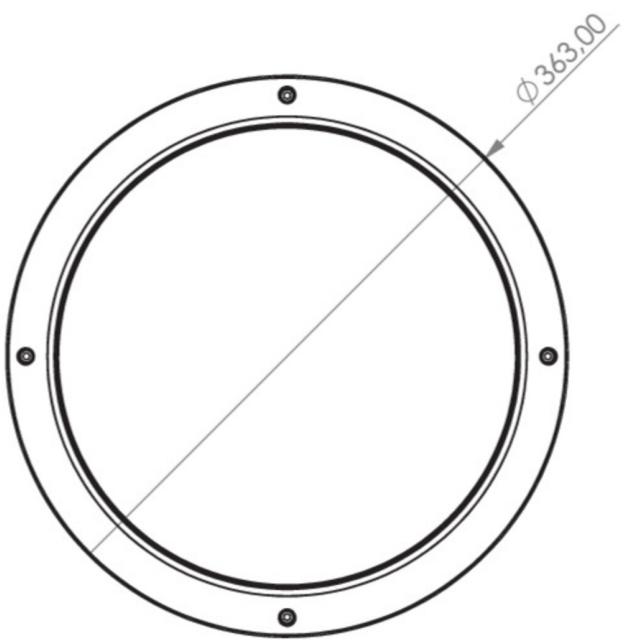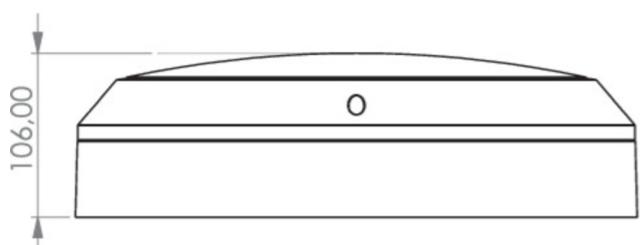

As of: 10.07.2024 - Subject to technical changes and errors.