



**Art.-Nr: QCW423SC-BM**

**General light, Safety luminaire**

**Universal, SelfControl, , , IP54, Zinc die-cast, white**

Round zinc die-cast luminaire with integrated motion detector for general lighting and illumination of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

In robust construction and timeless design, suitable for indoor and outdoor use.

The emergency LED can be folded out without tools during installation, e.g. for wall mounting to provide optimum illumination of escape and rescue routes.



More information





## TECHNICAL DATA

Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Housing material	Zinc die-cast
Housing color	white
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	WEEE, CE, D-Sign
Insulation class	1
Monitoring	SelfControl
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Height	106 mm
Diameter	363 mm
Weight	2.5
Weight incl. packaging	2.83
Customs tariff number	94056180
EAN	4260766559419





TECHNICAL DRAWING

QCW

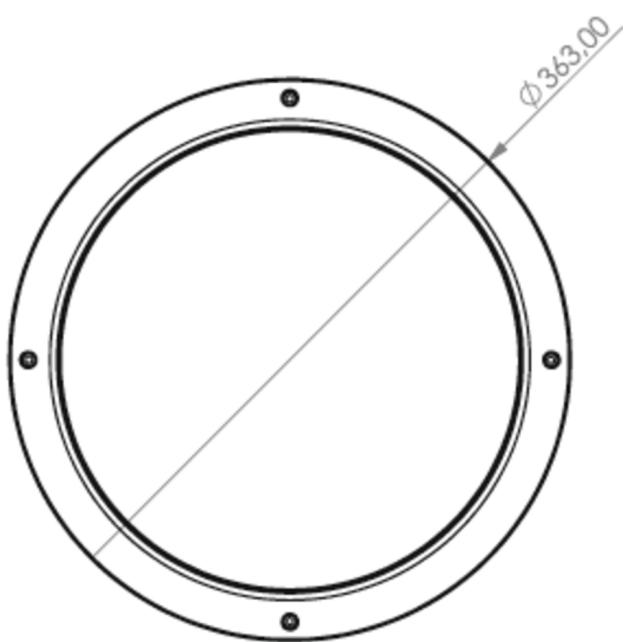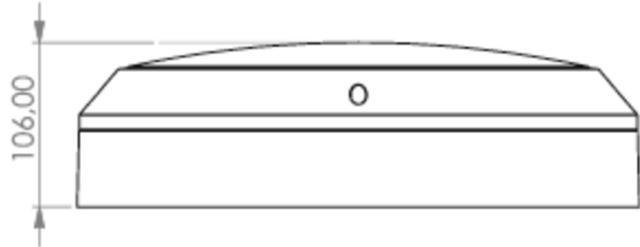

QCW

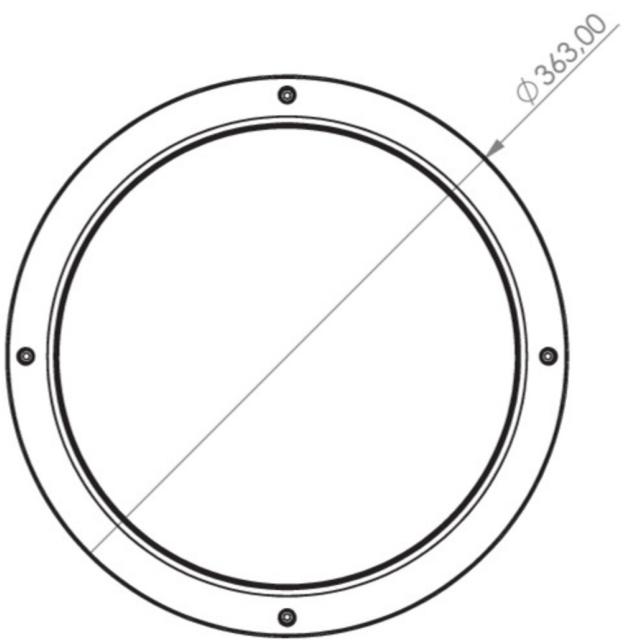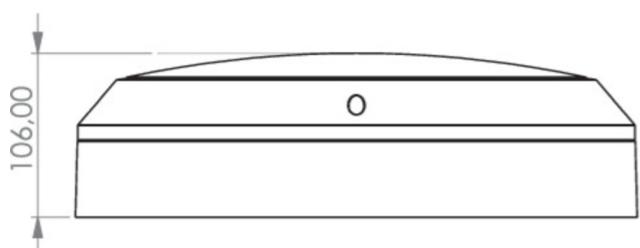

As of: 10.07.2024 - Subject to technical changes and errors.