



**Art.-Nr: V2W013SC-ESG**  
**Exit sign Single Battery**  
**Wall mounting, SelfControl (SC), 3 h, 30 m, IP65, Stainless Steel, Stainless steel**

High-grade, vandal-proof, stainless steel emergency exit sign luminaire for identifying escape and emergency routes with hinge mechanism that is easy to mount and service.

Automatic monitoring of safety luminaire with SelfControl. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information

[www.rp-group.com/en/item/V2W013SC-ESG](http://www.rp-group.com/en/item/V2W013SC-ESG)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Stainless Steel
Housing color	Stainless steel
Protection type (IP)	IP65
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Single Battery
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	NIMH 4,8V V/2,0Ah Ah
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V



Input frequency	50 / 60 Hz
Power max.	6,1 W
Power DS	4,5 W
Power BS	0,35 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	56 mm
Width	386 mm
Height	240 mm
Weight	6.16
Weight incl. packaging	6.64
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	150 lm
Customs tariff number	94056180
EAN	4260659563820



## TECHNICAL DRAWING

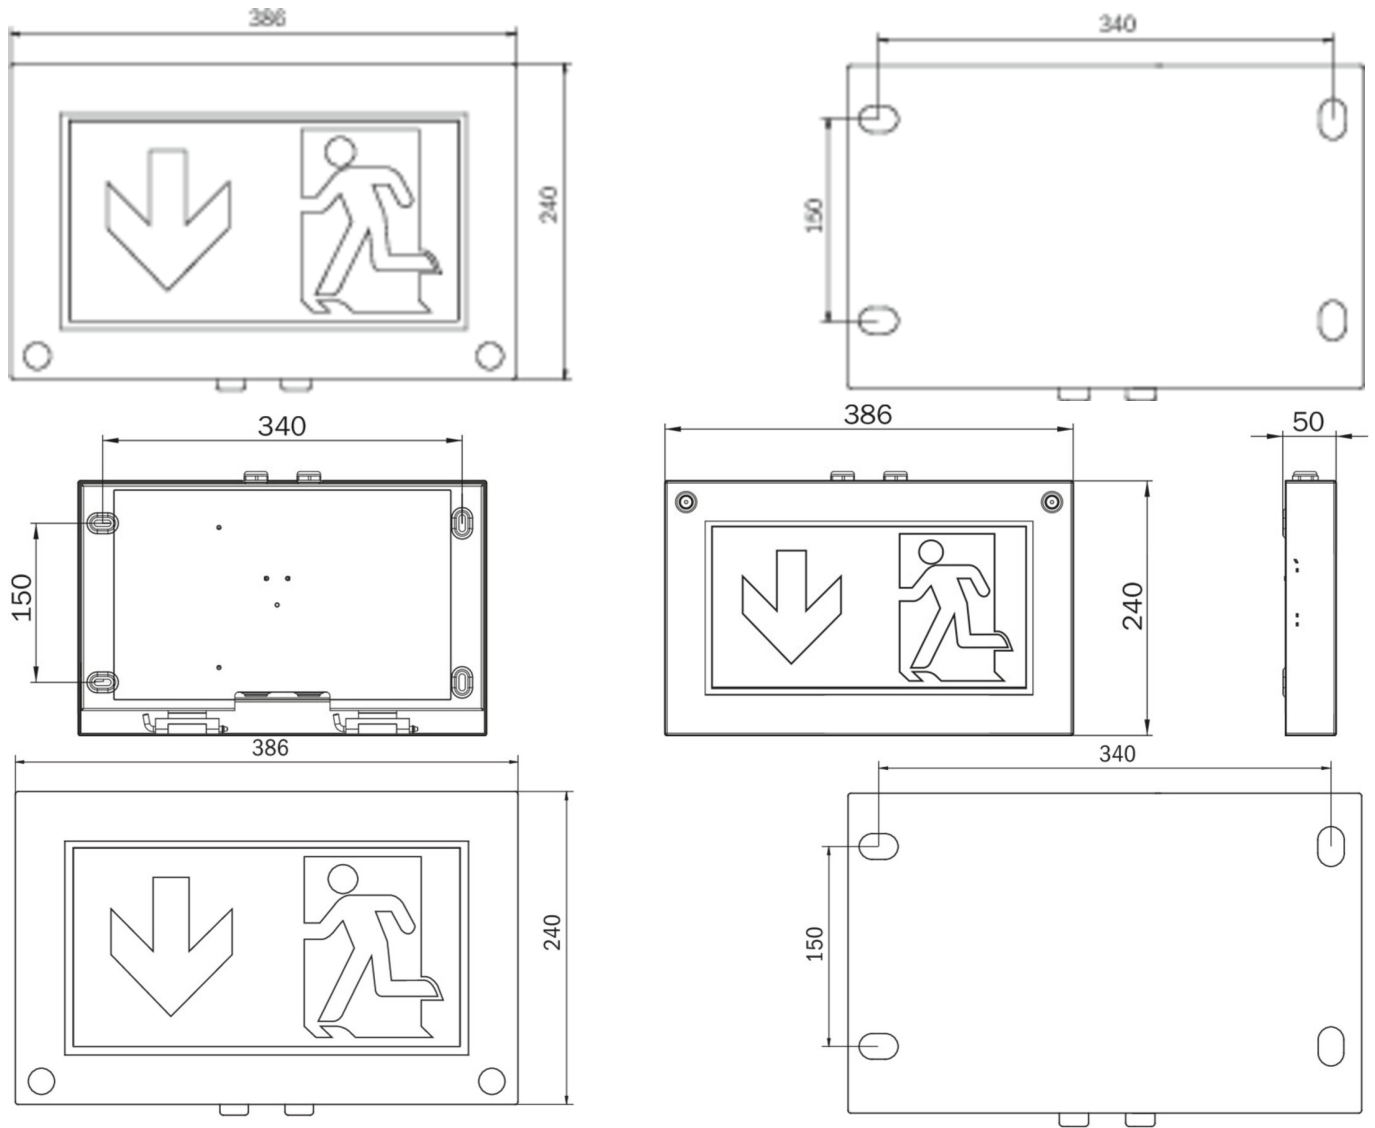

## ACCESSORY LIST

BALL2 - Wire mesh guard



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
V2W013SC		SelfControl (SC)	Single battery	Edelstahl	€	no	high	no	unlimited	itself
V2W013SC-V4A		SelfControl (SC)	Single battery	Edelstahl	€	no	high	no	unlimited	itself

As of: 11.10.2024 - Subject to technical changes and errors.