




Art.-Nr: WAF421SC-E
Safety luminaire Supply
Wall, SelfControl, 1 h, , IP20, Zinc die-cast, Stainless steel

LED emergency luminaire for surface wall mounting for the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838. It is harmonized with the design of the WEF or WER recessed wall luminaires and fit together with the exit signs of the A-series.

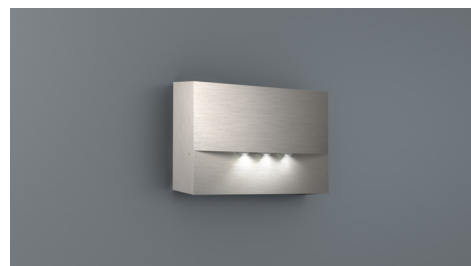

[More information](#)



TECHNICAL DATA


Luminaire type	Safety luminaire
Mounting	Wall
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Stainless steel
Protection type (IP)	IP20
Impact resistance (IK)	4
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl
Bridging time	1 h
Battery	LiFePO4 - 2 pcs - 3,2 V /1200mAh LiFePO4 - Lithium Iron Phosphate Battery
Power max.	5,4 W
Power DS	4,5 W
Power BS	0,9 W
Ambient temperature DS	-5 °C - 35 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	53 mm
Width	193 mm
Height	115 mm
Weight	0.22



Weight incl. packaging	0.25
Luminous flux mains	420 lm
Luminous flux emergency	420 lm
Customs tariff number	94056180
EAN	4260766556654



TECHNICAL DRAWING

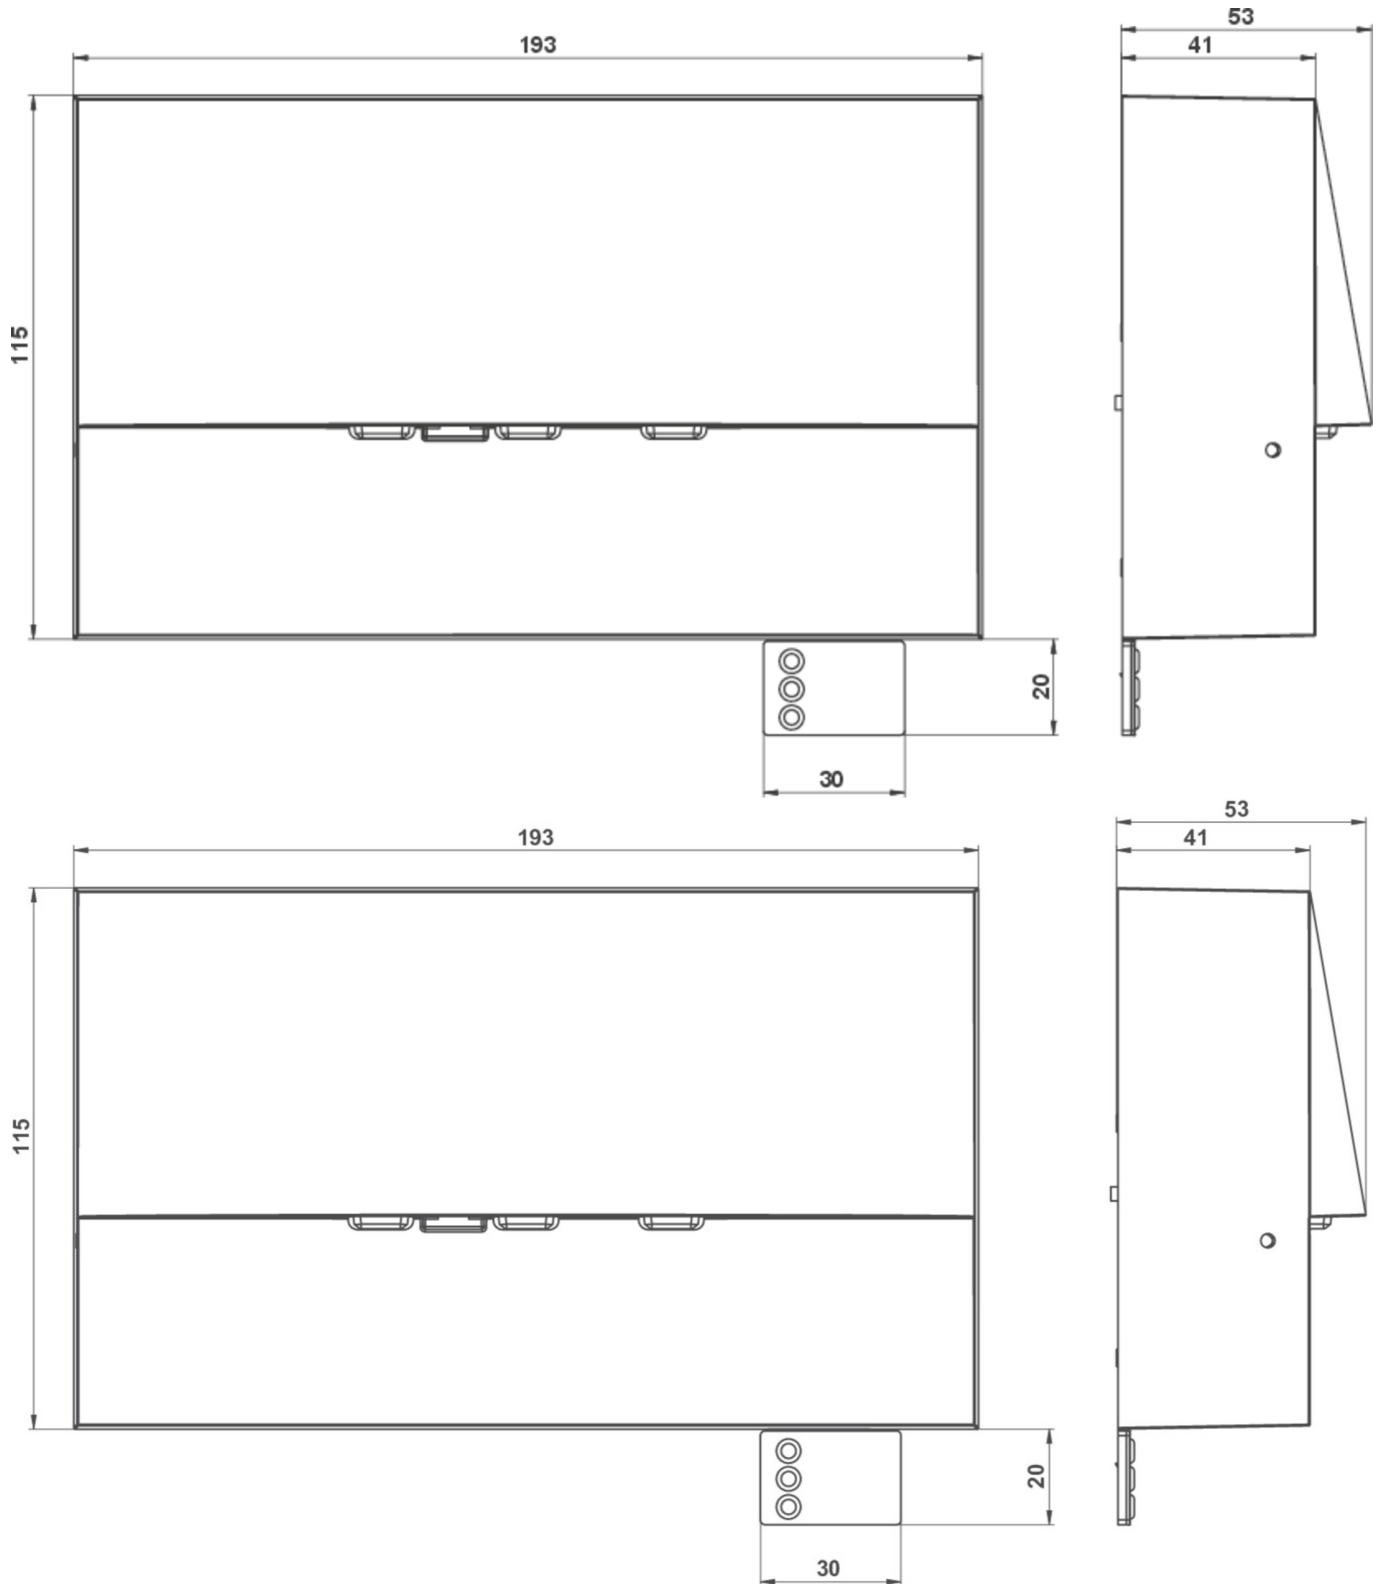



ACCESSORY LIST

LFP3212-LEO - Technology Battery

As of: 10.07.2024 - Subject to technical changes and errors.