



Art.-Nr: WER029ML

(ERT) Emergency route lighting

LED emergency luminaire for wall installation and for the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838. This recessed luminaire is designed for installation in conventional jacks. The mounting frame can be aligned with the jack. The zinc-aluminum cover is locked without externally visible fastening. Through the status LED which is incorporated in the lens the harmony of the housing is not interrupted.



Mer informasjon



TEKNISKE DATA





Type armatur	Sikkerhetslys
Monteringstype	Veggmontering
piktogram	Nei
Lyspærer	LED
Koffertmateriale	Sinkstøping
Farge på huset	hvit
IP-beskyttelse)	IP20
Slagstyrke (IK)	≥ 3
Sertifisering	Sjøpeltømming, CE
beskyttelses klasse	2
omsorg	sentral strømforsyning
overvåkning	ML
Brotid	sentral strømforsyning
Driftsmodus	Individuell lysveksling
Inngangsspenning AC	230 V
Inngangsfrekvens	50/60 Hz



Inngangsspenning DC	216 V
Maks effekt.	2,1 W
Ytelse DS	2,1 W
Ytelse BS	0,7 W
dybde	90 mm
Bredde	19 mm
Høyde	90 mm
Installasjonsdiameter	68 mm
Vekt	0.3
Vekt inkludert emballasje	0.33
Tverrsnitt for tilkobling	2.5 mm ²
Koblingsinngang	Nei
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Nei
Lysstrømnettverk	140 lm
Lysstrøm nødsituasjon	140 lm
Tolltariffnummer	94056180
Opprinnelsesland	DEUTSCHLAND
EAN	4260349829922



TEKNISK TEGNING

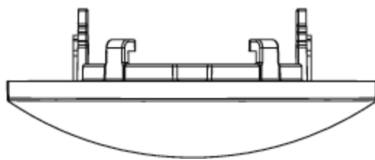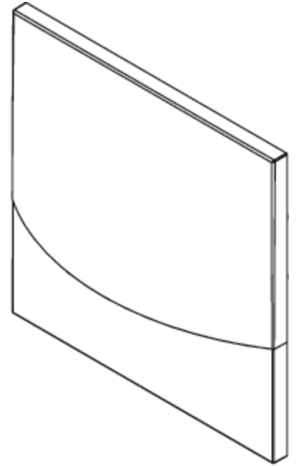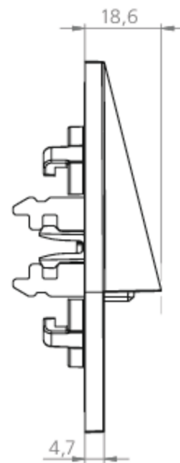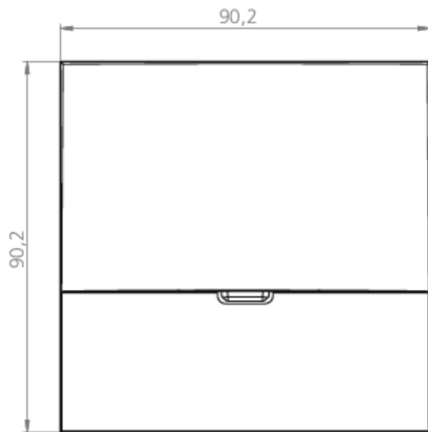

Fra: 29.06.2024 - Det tas forbehold om tekniske endringer og feil.