



Art.-Nr: WGD411SC


Exit sign Supply

Recessed mounting, SelfControl (SC), 1 h, 46 m, IP20, Metal, white

Square emergency exit sign cube luminaire for identifying escape and emergency routes. It can be mounted straight onto the ceiling or suspended using the appropriate accessories.

The cube shape means that this plastic luminaire is easily recognisable from four sides. Ideal for use where routes intersect, e.g. in large stores with aisles.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by printed pictograms, determined on the basis of logic. The pictograms used correspond to DIN ISO 7010 (arrow to the right, left and down).

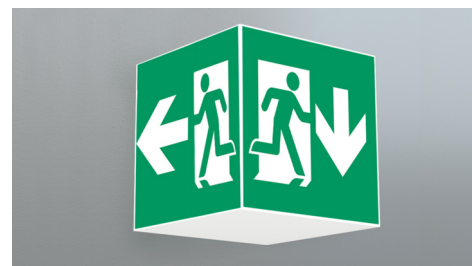

More information

www.rp-group.com/en/item/WGD411SC



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	46 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	white
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	LiFePO4 6,4 V/1,6 Ah
Power max.	6,4 W
Power DS	5,6 W
Power BS	0,9 W
Ambient temperature DS	-5 °C - 40 °C




Ambient temperature BS	-5 °C - 40 °C
Depth	237 mm
Width	237 mm
Height	237 mm
Weight	1.28
Weight incl. packaging	1.42
Luminous flux mains	470 lm
Luminous flux emergency	470 lm
Customs tariff number	94056120
EAN	4260766556807




TECHNICAL DRAWING

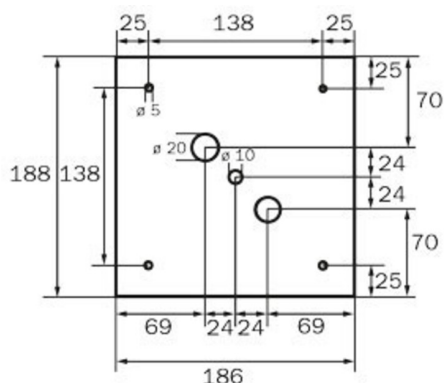


WG

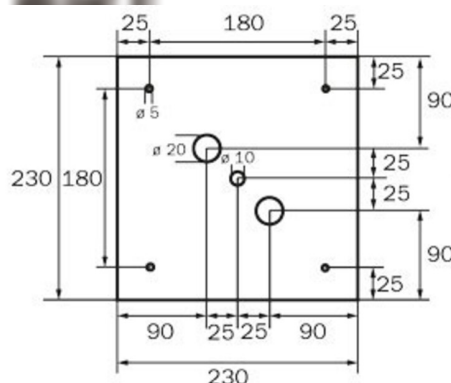


WK

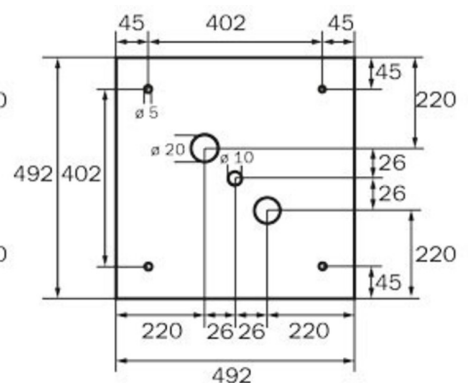


WX




WG

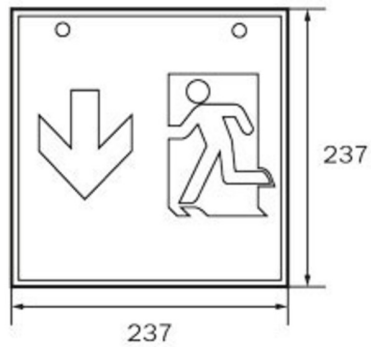

WK

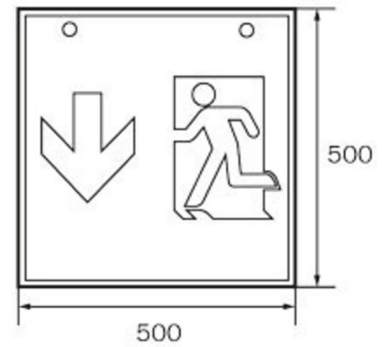

WX

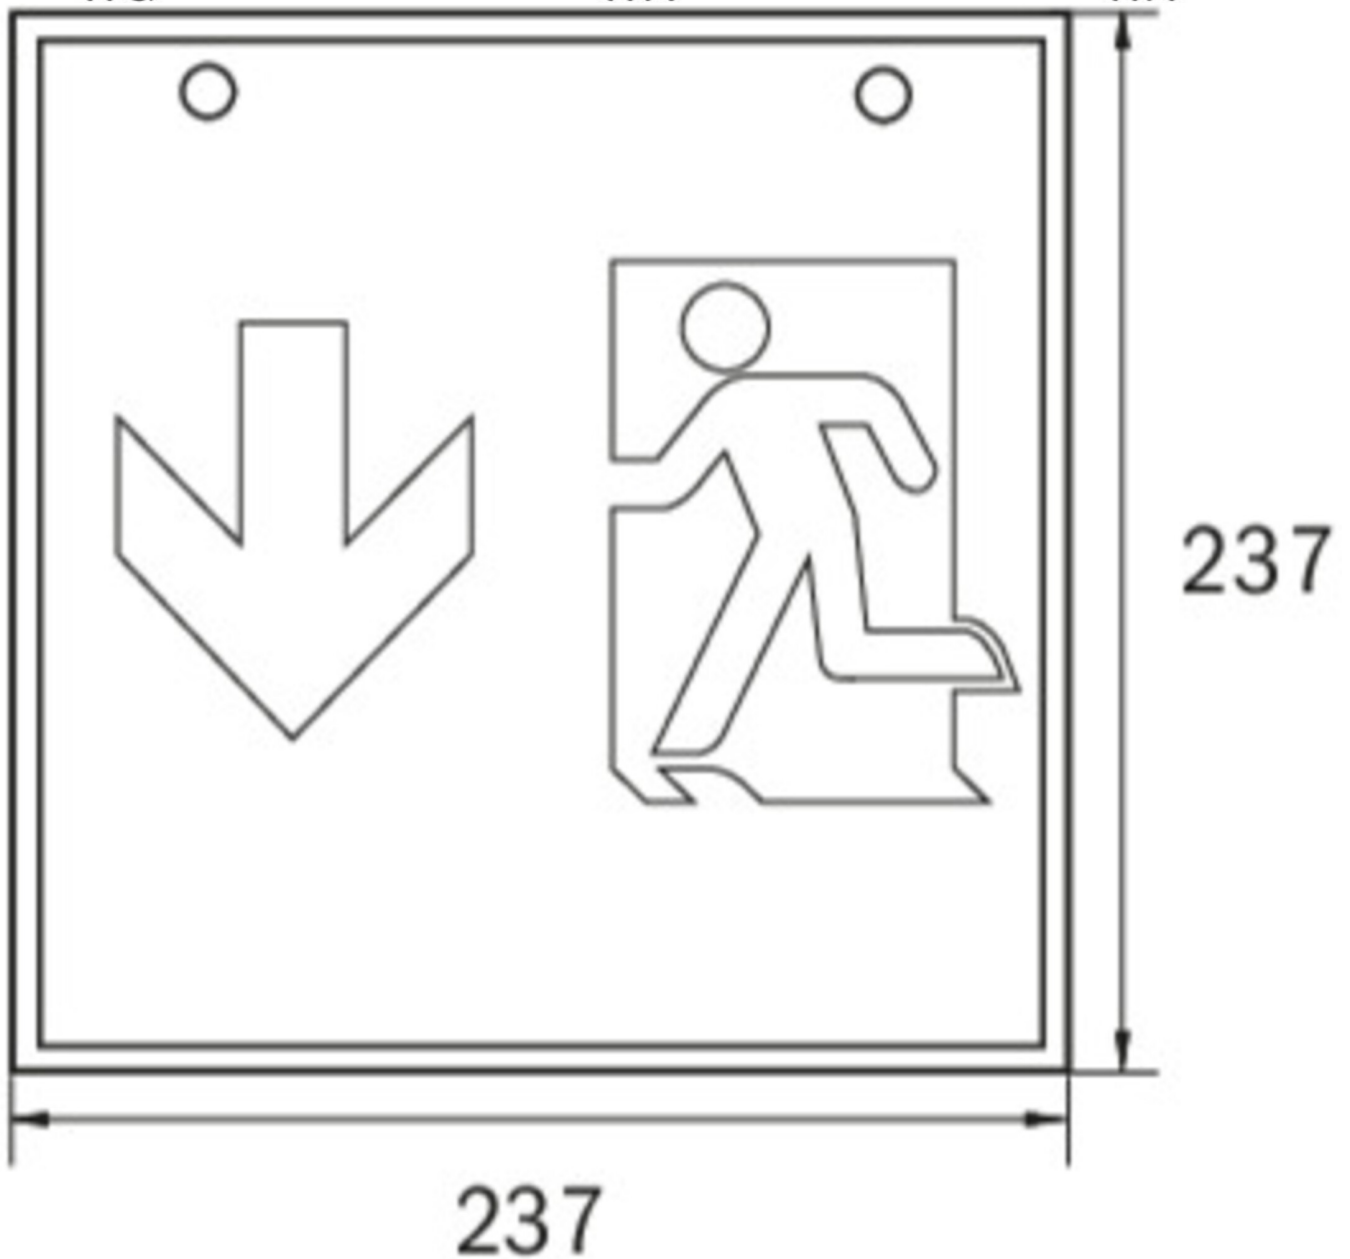



ACCESSORY LIST

LFP3216-SET-2AKKU - CS_VALUE_BatteryTechnology. Battery

As of: 11.10.2024 - Subject to technical changes and errors.