




Art.-Nr: WKW413SC

Exit sign

Wall, SelfControl, , 36 m, IP20, Metal, white

The omnidirectional recognizable cube-polycarbonate light for a visible marking of escape routes of up to four sides. Ideal for applications such as crossroads in department stores with several aisles. Planning reliability through logically predefined imprinted pictograms. LED escape route indication luminaire in accordance with DIN EN 605981, EN 60598-2-22, EN 7010 and DIN EN 1838th

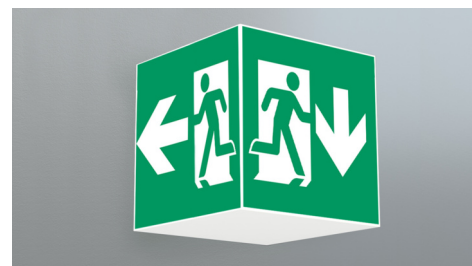

[More information](#)





TECHNICAL DATA


| | |
|------------------------|---------------|
| Luminaire type | Exit sign |
| Mounting | Wall |
| Recognition distance | 36 m |
| Pictograph | Set |
| Housing material | Metal |
| Housing color | white |
| Protection type (IP) | IP20 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE |
| Insulation class | 1 |
| Monitoring | SelfControl |
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 195 mm |
| Width | 195 mm |
| Height | 195 mm |
| Weight | 0.72 |
| Weight incl. packaging | 0.86 |
| Customs tariff number | 94056120 |
| EAN | 4260766556906 |




TECHNICAL DRAWING

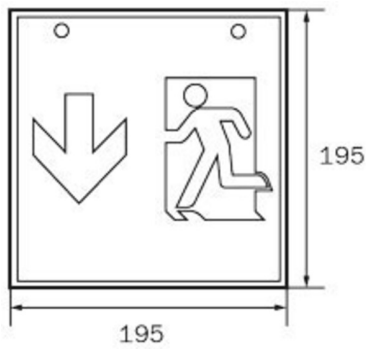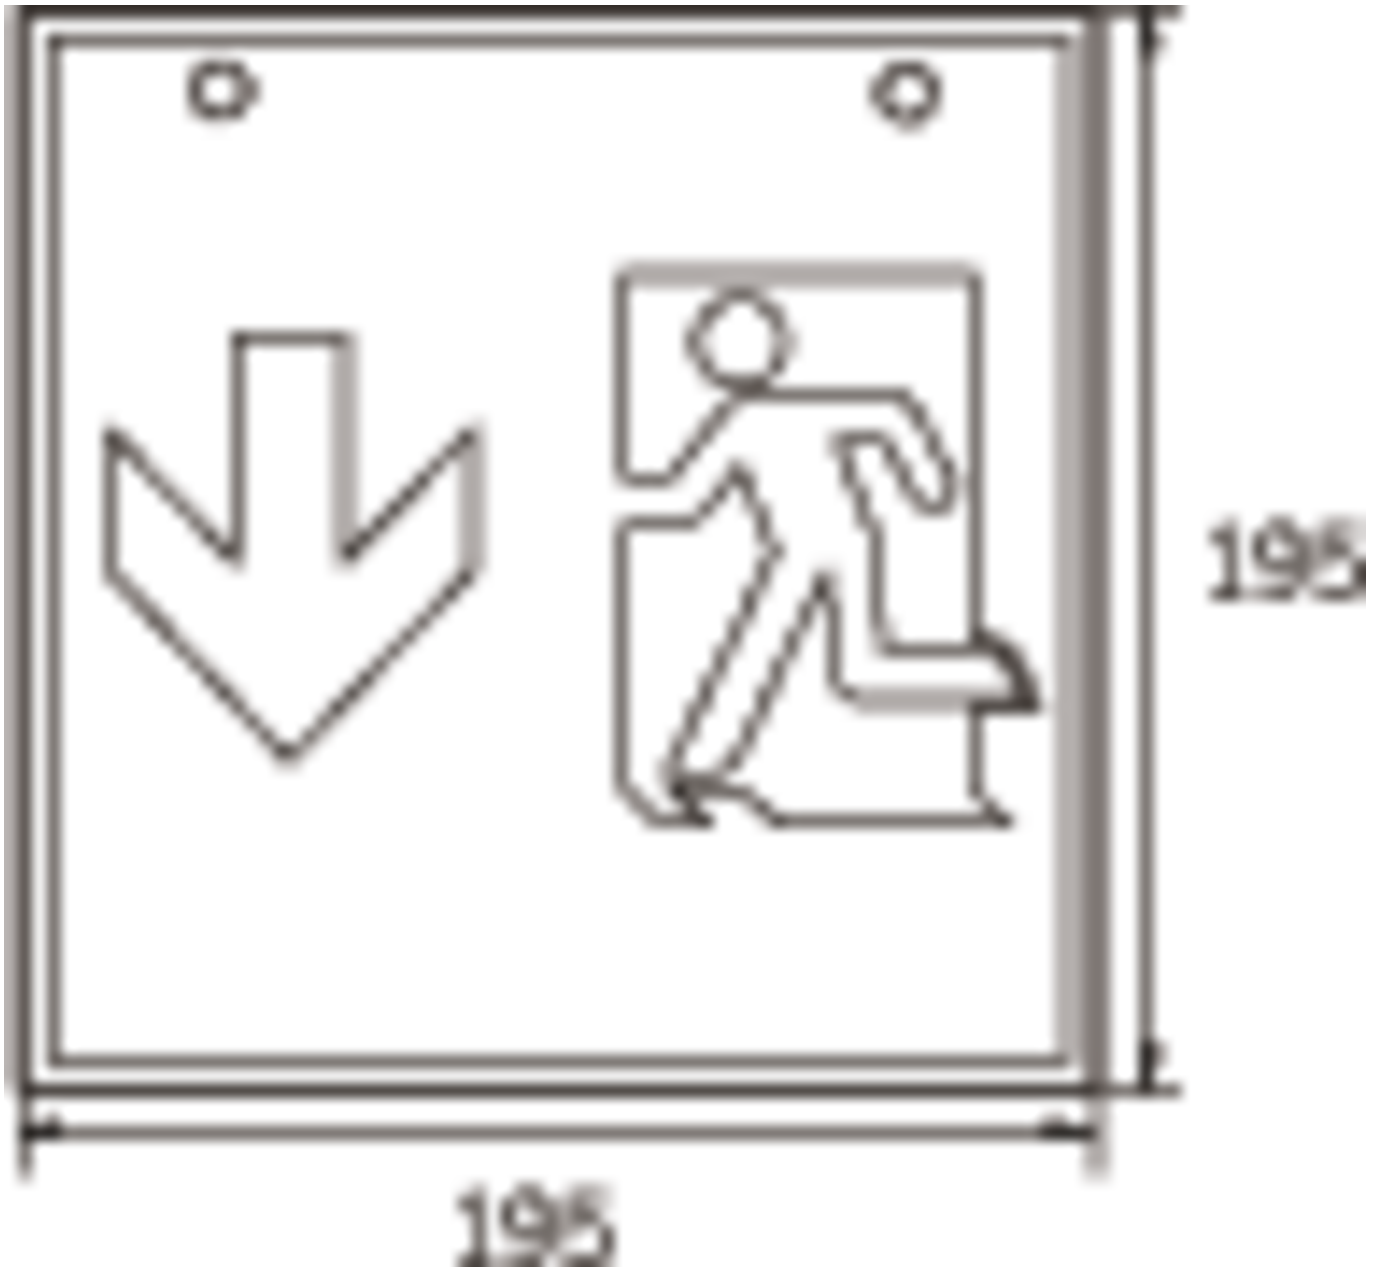


WG

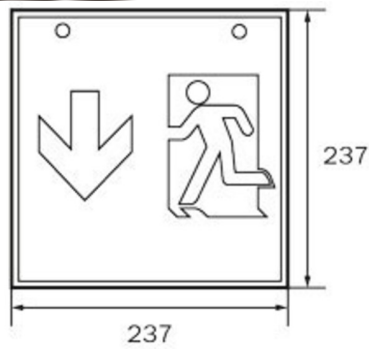


WK

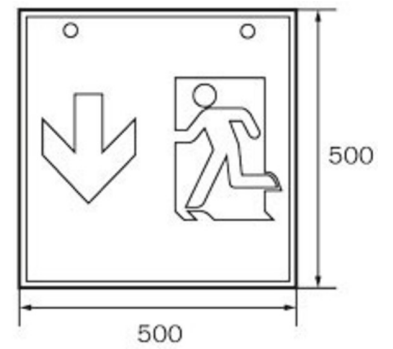


WX

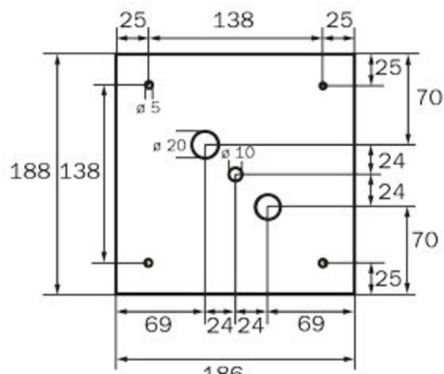


WG

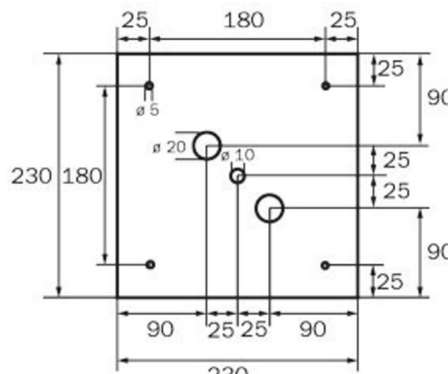

WK

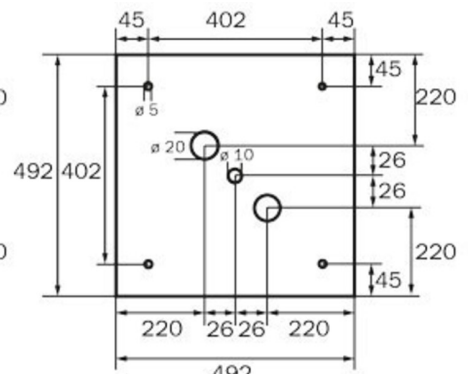

WX

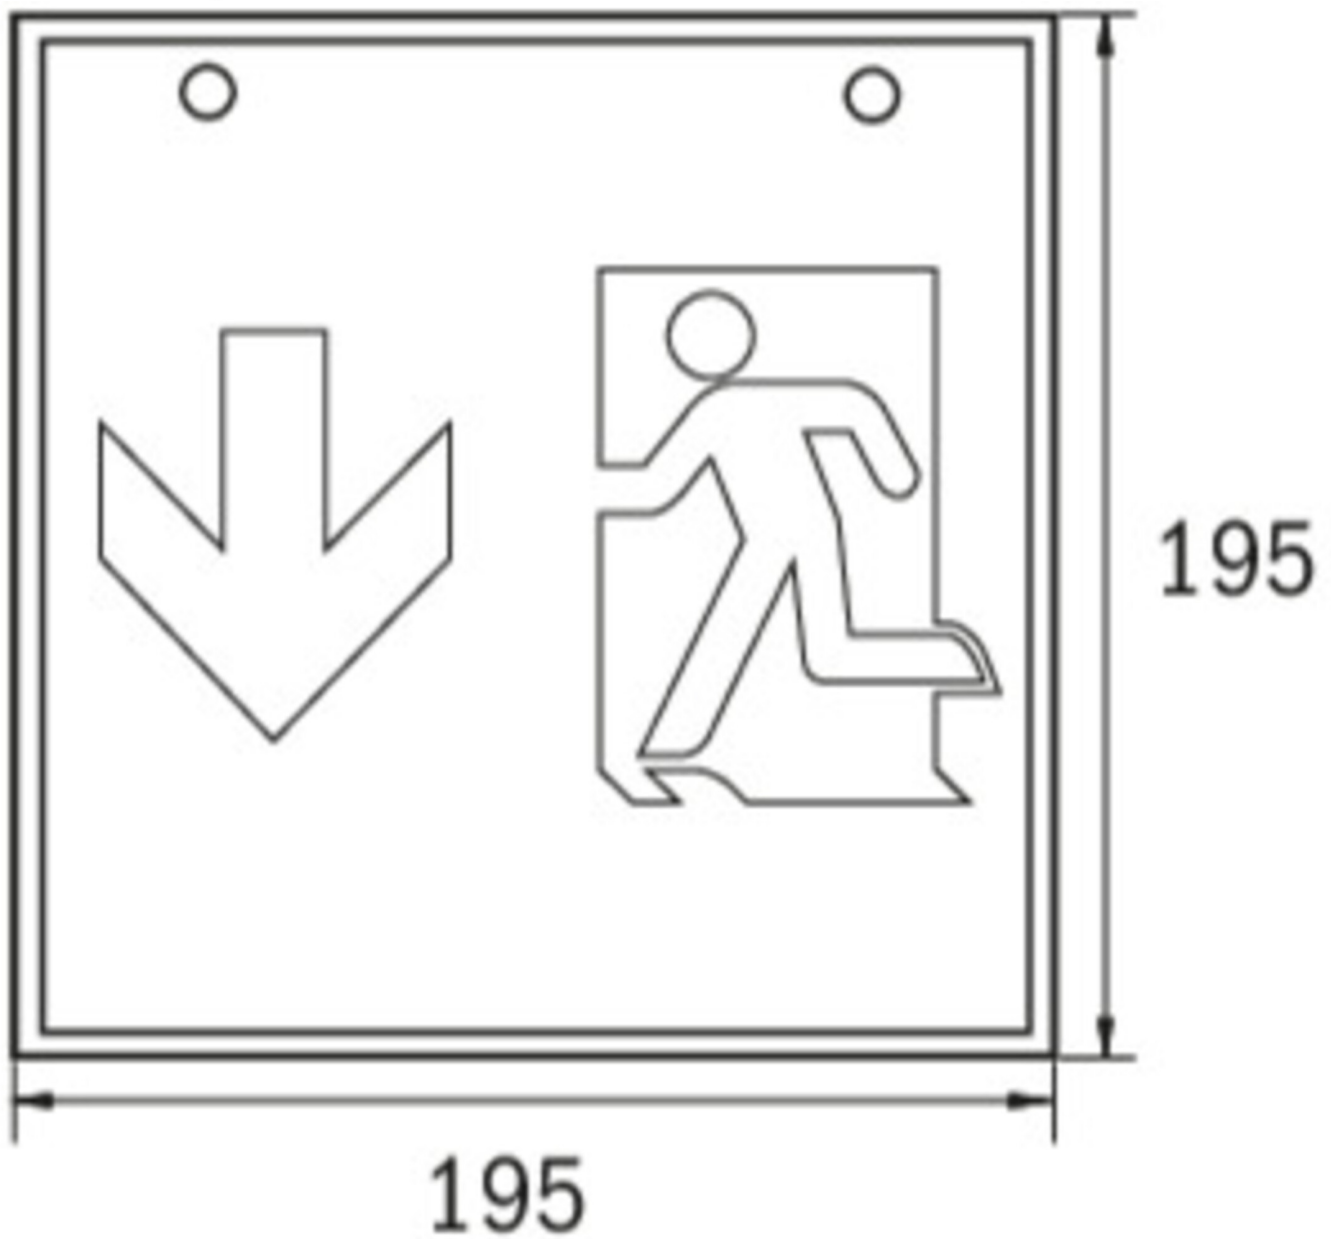



ACCESSORY LIST

LFP3233-SET-2AKKU - Technology Battery

As of: 11.07.2024 - Subject to technical changes and errors.