



Art.-Nr: XPMU011SC
Safety luminaire Single Battery
Universal, SelfControl, 1 h, , IP66, Aluminum die-cast,
Polycarbonate, Housing color



Explosion-proof LED polycarbonat-cylinder Safety light for gas and dust Ex zones.
Available in three sizes with a luminous flux of up to 5000lm.

Prepared for two cable entries for through-wiring. By applying a pictogram can
also be used as a exit sign.

Mounting options Wall or ceiling mounting with adapter or suspension with chain
eye.

According to 2014/34/EG (ATEX)

Zone 1 / Zone 21 gas and dust

- Ex d IIB T6 Gb / Ex d IIB T6 Gb
- Ex t IIIC T85°C Db

Buidt according to:

-EN 60079-0:2018, EN 60079-1:2014, EN 60079-31:2014

-Certified by INERIS 20ATEX0005X



[More information](#)



TECHNICAL DATA


Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Aluminum die-cast, Polycarbonate
Protection type (IP)	IP66
Impact resistance (IK)	5
Certification	Waste disposal, CE
Insulation class	1
Supply	Single Battery
Monitoring	SelfControl
Bridging time	1 h
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V



Input frequency	50 / 60 Hz
Power max.	40 W
Power DS	40 W
Power BS	3 W
Depth	750 mm
Width	157 mm
Height	197 mm
Weight	5.5
Weight incl. packaging	6.4
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	Yes
Battery connection	Clip
Dimming function	No
Luminous flux mains	4600 lm
Luminous flux emergency	750 lm
Customs tariff number	94051190
Country of origin	SPANIEN
EAN	4260659564582



TECHNICAL DRAWING

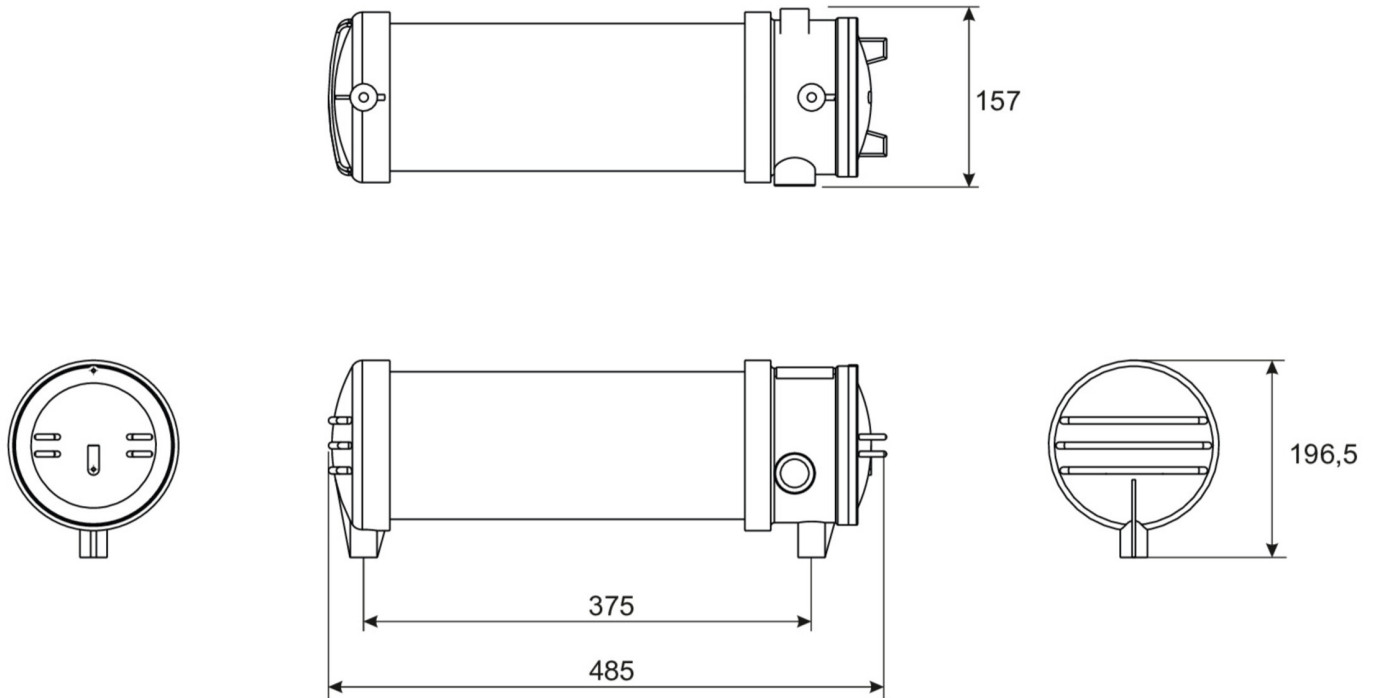

ACCESSORY LIST

X-K0001 -
X-MB001 -
X-KE001 -
X4N -

As of: 29.06.2024 - Subject to technical changes and errors.