



Art.-Nr: AXC009ML-AZ Exit sign Centralised power supply systems Ceiling mounting, ML, CPS, 30 m, IP20, Zinc die-cast, Anthracite

The AXC is a zinc-diecast exit sign for recessed wall mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.







More information



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Ceiling mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	ML
Bridging time	CPS
Operating mode	single luminaire switching
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	4,5 W
Power DS	4,5 W






Power BS	1,1 W
Depth	80 mm
Width	312 mm
Height	181 mm
Installation length	176 mm
Installation width	68 mm
Installation height	40 mm
Weight	1.56
Weight incl. packaging	2.05
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260581715380





TECHNICAL DRAWING

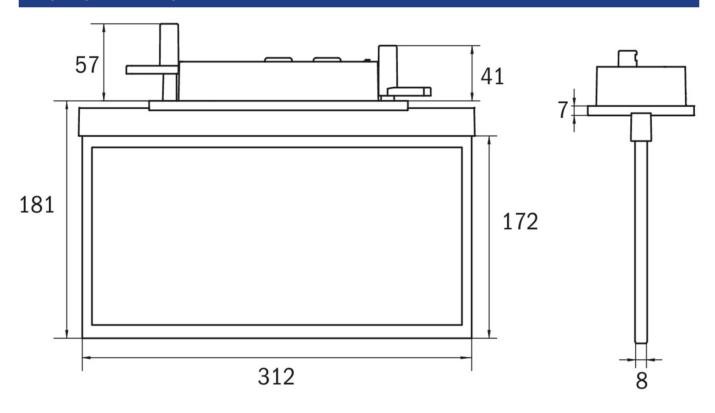

ACCESSORY LIST

AM-XBE -





RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
AXC009ML	3 +	ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
AXC009ML-E		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
AXC509CC		CoreCompact 24	Central power supply		€€	Yes	low	Yes		central
AXC509CC- AZ	3	CoreCompact 24	Central power supply		€€	Yes	low	Yes		central
AXC509CC-E		CoreCompact 24	Central power supply		€€	Yes	low	Yes		central

As of: 09.07.2024 - Subject to technical changes and errors.