



Art.-Nr: AMR009ML Exit sign Central power supply Recessed wall mounting, ML, Central power supply, 22 m, IP40, Zinc die-cast, white

The AMR is a zinc-diecast exit sign for recessed wall mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.







More information



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE, ENEC
Insulation class	2
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	single luminaire switching
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	3,5 W
Power DS	3,5 W






Power BS	1,1 W
Depth	79 mm
Width	236 mm
Height	151 mm
Installation length	176 mm
Installation width	68 mm
Installation height	40 mm
Weight	1.02
Weight incl. packaging	1.38
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260581714598





TECHNICAL DRAWING

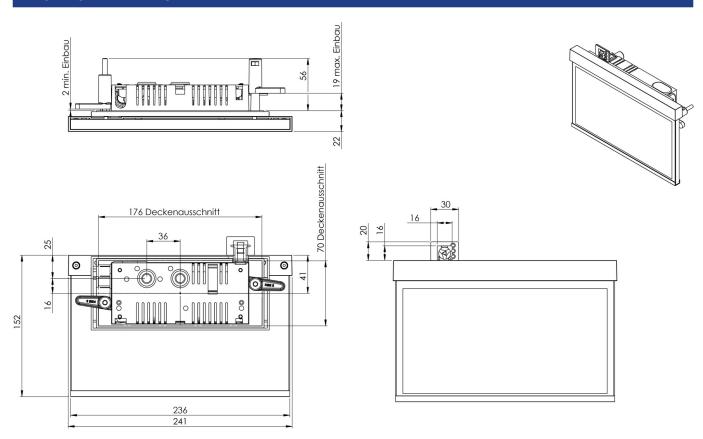

ACCESSORY LIST

BALLPLX-AM -

AM-XBE -





RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
AMR009ML- AZ	3	ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
AMR009ML-E	3	ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
AMR509CC	3	CoreCompact 24	Central power supply		€€	Yes	low	Yes		central
AMR509CC- AZ		CoreCompact 24	Central power supply		€€	Yes	low	Yes		central
AMR509CC-E		CoreCompact 24	Central power supply		€€	Yes	low	Yes		central

As of: 27.06.2024 - Subject to technical changes and errors.