



Art.-Nr: EERL029ML-E
Sikkerhetslys sentral strømforsyning
Takmontering, ML, sentral strømforsyning, , IP20,
Sinkstøping, rustfritt stål

LED safety light for illuminating escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-222 and DIN EN 1838.

The recessed ceiling light made of zinc-aluminum adapts unobtrusively to the ceiling. In addition to conventional ceiling installation, it can also be installed in conventional and fire protection boxes. The status LED integrated into the lens does not interrupt the harmony of the housing. The use of diffuser lenses and powerful LED ERT technology achieves optimal light distribution and illumination of the escape and rescue routes. The innovative integrated lens carrier with quick-mounting device enables the flexible use of different lens types depending on the application. Round and corridor lenses are already included in the scope of delivery for each light.



Mer informasjon



TEKNISKE DATA

Type armatur	Sikkerhetslys
Monteringstype	Takmontering
piktogram	Nei
Lyspærer	LED
Koffertmateriale	Sinkstøping
Farge på huset	rustfritt stål
IP-beskyttelse)	IP20
Slagstyrke (IK)	≥ 3
Sertifisering	Søppeltømming, CE, ENEC
beskyttelses klasse	2
omsorg	sentral strømforsyning
overvåkning	ML
Brotid	sentral strømforsyning
Driftsmodus	Individuell lysveksling
Inngangsspenning AC	230 V
Inngangsfrekvens	50/60 Hz
Inngangsspenning DC	216 V




Maks effekt.	2,1 W
Ytelse DS	2,1 W
Ytelse BS	0,7 W
Høyde	4 mm
diameter	88 mm
Installasjonsdiameter	68 mm
Vekt	0.26
Vekt inkludert emballasje	0.39
Tverrsnitt for tilkobling	2.5 mm ²
Koblingsinngang	Nei
Blokkering av nødlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Nei
Lysstrømnettverk	140 lm
Lysstrøm nødsituasjon	140 lm
Tolltariffnummer	94056180
Opprinnelsesland	DEUTSCHLAND
EAN	4260682151339





TEKNISK TEGNING

Maße EER / EEQ

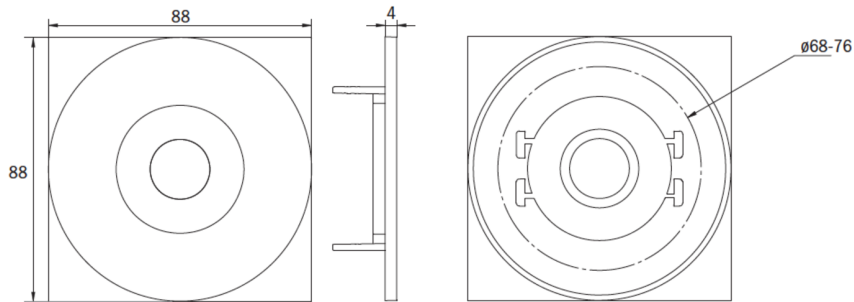


Lochausschnitt EER / EEQ

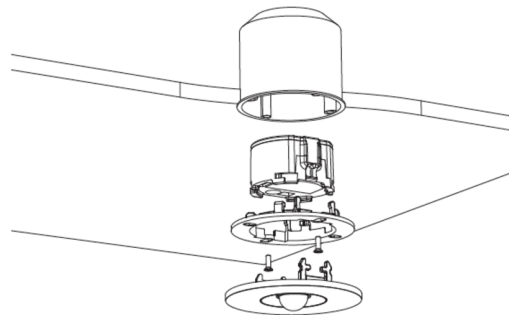

EEx029: Schalterdose notwendig (nicht im Lieferumfang enthalten)

Einzelbatterie-Elektronik-Box (UH-1)

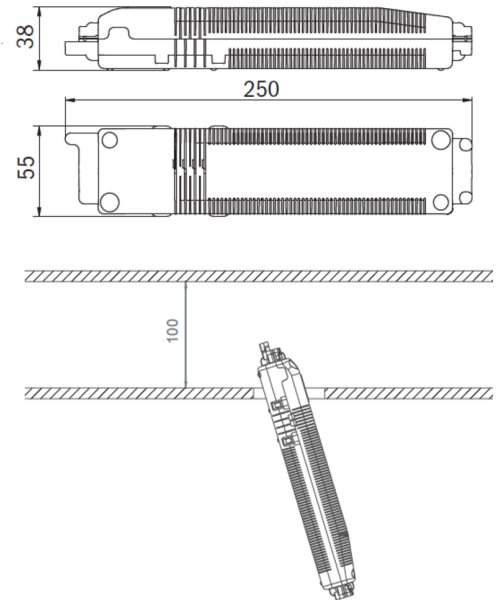

TILBEHØRSLISTE

- LSYS-B4 -
- LSYS-F4 -
- LSYS-R4 -
- LSYS-S4 -



LIGNENDE PRODUKTER

Varenr.	Bilde	overvåkning	omsorg	Farge	investering	Automatisk inspeksjonsbok	Vedlikeholdsinnsett	fjernvedlikehold	maks. lys	Individuell lysovervåking
EERL029ML		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt
EERL029ML-AZ		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt
EERL029ML-AZ-DOSE		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt
EERL029ML-DOSE		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt
EERL029ML-E-DOSE		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt



Varenr.	Bilde	overvåkning	omsorg	Farge	investering	Automatisk inspeksjonsbok	Vedlikeholdsinnsett	fjernvedlikehold	maks. lys	Individuell lysovervåking
EERL529CC		CoreCompact 24	Sentral strømforsyning		€€	Ja	lav	Ja		sentralt
EERL529CC-AZ		CoreCompact 24	Sentral strømforsyning		€€	Ja	lav	Ja		sentralt
EERL529CC-E		CoreCompact 24	Sentral strømforsyning		€€	Ja	lav	Ja		sentralt

Fra: 28.06.2024 - Det tas forbehold om tekniske endringer og feil.