



Art.-Nr: KSC019ML **Exit sign, Safety luminaire Central power supply** Universal, ML, Central power supply, 22 m, IP54, Plastic, white

Innovative high-grade LED exit sign and emergency luminare for universal mounting. This luminaire using only 3 parts has a simple installation. Applicable for maintained or non-maintained operation mode. The tolless change and variable use of the pictograms provide planning security on site. Universal pictogram set (left, right, up, down) included.

The KSC luminaire is also designed for illumination of fire fighting and first aid facilities. The equipment of the first aid facilities is lighted by at least 5 lux according to EN 1838.

Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.







More information



TECHNICAL DATA

Exit sign, Safety luminaire				
Universal				
22 m				
Set				
LED				
Plastic				
white				
IP54				
≥3				
Waste disposal, CE, CNBOP, ENEC				
2				
Central power supply				
ML				
Central power supply				
single luminaire switching				
230 V				
F0 / 60 LI=				
50 / 60 Hz				






Power max.	3,2 W
Power DS	3,2 W
Power BS	1 W
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.62
Weight incl. packaging	0.7
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	220 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260349829595





TECHNICAL DRAWING

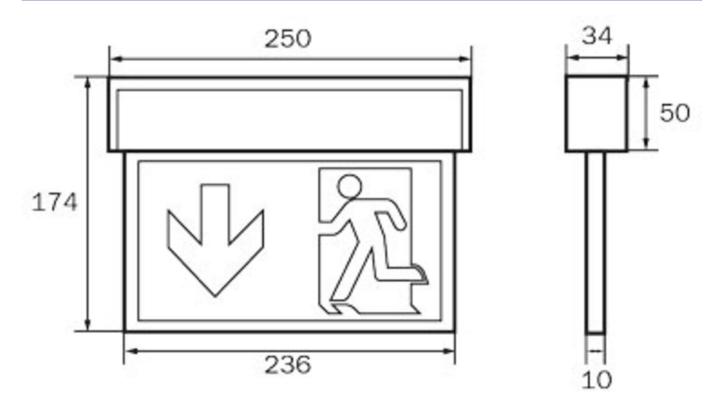

ACCESSORY LIST

DSA -

AWKSU -

2PW-EB -

KMBE -

BALLPLX-KMU -

KS4FIRE -

KS4HELP -





RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. Iuminaires	Single luminaire monitoring
KSC019-SW	OTOMA OTOMA									
KSC019ML- SW	OTION.	ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
KSC519CC- SW	OTIONA III	CoreCompact 24	Central power supply		€€	Yes	low	Yes		central
KSC519CC	OTION.	CoreCompact 24	Central power supply		€€	Yes	low	Yes		central

As of: 28.06.2024 - Subject to technical changes and errors.