



Art.-Nr: KWID418WL **Exit sign Single Battery** Recessed mounting, Wireless Professional (WL), 8 h, 16 m, IP65, Plastic, white

Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for ceiling mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.







More information www.rp-group.com/en/item/KWID418WL



TECHNICAL DATA

Luminaire type	Exit sign			
Mounting	Recessed mounting			
Recognition distance	16 m			
Pictograph	Set			
Illuminant	LED			
Housing material	Plastic			
Housing color	white			
Protection type (IP)	IP65			
Impact resistance (IK)	6			
Certification	CE, WEEE, D-Sign			
Insulation class	2			
Supply	Single Battery			
Monitoring	Wireless Professional (WL)			
Bridging time	8 h			






Battery	LiFePO4 6,4 V/3,3Ah Ah				
Operating mode	Standby circuit / permanent circuit				
Input voltageAC	230 V				
Input frequency	50 Hz				
Power max.	5,5 W				
Power DS	3,6 W				
Power BS	0,7 W				
Ambient temperature DS	-5 °C - 40 °C				
Ambient temperature BS	-5 °C - 40 °C				
Depth	93 mm				
Width	390 mm				
Height	139 mm				
Weight	0.93				
Weight incl. packaging	1.03				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056120				
EAN	4260766550409				





TECHNICAL DRAWING

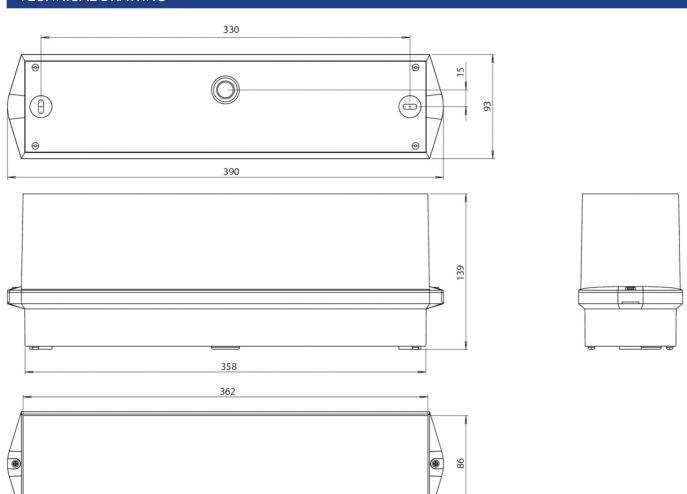

ACCESSORY LIST

BKW -

RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KWID018SC	(E)	SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself

As of: 11.10.2024 - Subject to technical changes and errors.